

**Index**

Page

<b>General</b>	194
Approvals	195
Informations	196
Cam Switches	198
Basic designs	200
<b>Cam Switches</b>	203
 On-Off switches, Changeover switches	203
Star-Delta switches	207
Multi speed switches	211
Control switches	215
Voltmeter selector switches	218
Ammeter switches	219
Gang switches	221
Multi step switches	224
<b>Mini-Cam Switches</b>	236
 Technical data	236
On-Off switches, Changeover switches	237
Star-Delta switches	237
Control switches	237
Voltmeter selector switches, Ammeter switches	238
Gang switches, Multi step switches	238
<b>Load switches</b>	240
 On-Off switches	240
Changeover switches	241
<b>Handles and plates</b>	242
 Operating knobs and handles	242
Escutcheon plates	243
Angles of rotation	247
<b>Optional Extras</b>	249
 Drive units	249
Door couplings	250
Key operated switches	251
Padlock devices	252
Switch interlocks	253
Couplings	254
Accessories	256
<b>Special switches</b>	257
<b>Technical data</b>	259
 Cam switches	259
Load switches	260
<b>Dimensions</b>	262
 Cam switches	262
Load switches	266
Accessories	267

## General

### Test Authorities, Registration Mark, Approvals

Low voltage switchgear from Benedict GmbH is built and tested to national and international specifications. All devices suit all important specifications without any test obligation, like VDE, BS and also relative to IEC Recommendations and to European Standards like IEC 947 and EN 60947. It is for this reason of our Low voltage switchgear is used all over the world. In order to provide special versions, limitations to the max. voltages, currents and power ratings or special markings are sometimes necessary.

### Quality Control System

Since November 1991 Benedict GmbH has been certified according to the quality control system **ÖNORM EN ISO 29001**. The target of the ISO-certification is, to grant the customer the quality of the performance of his supplier, who is audited in accordance with this standard.

### CE-Marking



The manufacturer has to sign his products with the CE-Marking. With the CE-Marking the manufacturer confirms the accordance with the different EEC Directives. The CE-Marking is absolutely necessary to sell the products in the EEC.

Below you find the EEC Directives concerning our products.

Low Voltage Directive 2006/95/EC

EMC Directive 2004/108/EC

RoHS + WEEE 2002/95/EC + "002/96/EC

Country	North America	Russia
State deputy or private examination (state admitted)	UL Canada, USA	EAC
Label marking of examination boards	c <sub>UL</sub> us Listed c <sub>RA</sub> us Component	EAC
Duty of approvals	all switchgear	all switchgear

### Explanations for choice and supply of low voltage switchgear in Canada and USA

#### Marking of auxiliary contacts

At several devices in UL-data are two voltages for auxiliary contacts mentioned (e. g.: 600 volts at same potential, 150 volts at different potentials). That means, if the voltage is higher than 150 volts, the control voltage applied to input terminals must be at the same potential.

Low voltage switchgear for auxiliary circuits (e. g. contactor relays, control units, auxiliary contacts in general) usually approved for "Heavy Duty" or "Standard Duty" UL and besides these marked with the admissible max. voltage or with short codes (see table).

Marking of auxiliary contacts according to CSA and UL	Max. rated values per pole	Cont.	Contact Rating Code Designation		
Voltage	Current Make A	Break A	Current A		
Heavy Duty (HD or HVY DTY)	AC 120 AC 240 AC 480 AC 600  DC 125 DC 250 DC 600	60 30 15 12  2,2 1,1 0,4	6 3 1,5 1,2  2,2 1,1 0,4	10 10 10 10  10 10 10	A150 A300 A600 A600  N150 N300 N600
Standard Duty (SD or STD DTY)	AC 120 AC 240 AC 480 AC 600  DC 125 DC 250 DC 600	30 15 7,5 6  1,1 0,55 0,2	3 1,5 0,75 0,6  1,1 0,55 0,2	5 5 5 5  5 5 5	B150 B300 B600 B600  P150 P300 P600
-	AC 120 AC 240 AC 480 AC 600  DC 125 DC 250 DC 600	15 7,5 3,75 3  0,55 0,27 0,1	1,5 0,75 0,375 0,3  0,55 0,27 0,1	2,5 2,5 2,5 2,5  2,5 2,5 2,5	C150 C300 C600 C600  Q150 Q300 Q600
-	AC 120 AC 240 DC 125 DC 250	3,6 1,8 0,22 0,11	0,6 0,3 0,22 0,11	1 1 1 1	D150 D300 R150 R300
-	AC 120	1,8	0,3	0,5	E150

#### Discernment at UL-Standards

##### Recognized Component Industrial Control Equipment

UL issues yellow "Guide cards" with Guide- and File-No.

Devices have permission to be marked with the label



Devices as components approved for "factory wiring": devices for employment in control panels, when they are selected, mounted and wired according to the charging conditions by skilled worker.

Valid UL-Standards:  
UL 508 "Standard for Industrial Control Equipment" (partly limited)

##### Listed Industrial Control Equipment

UL issues white "Guide cards" with Guide- and File-No.

Devices have to be marked with the "UL-Listing Mark"



Devices approved for "field wiring",  
a) devices for employment in control panels, when they are mounted and wired by skilled worker.  
b) devices for retail in USA

Valid UL-Standards:  
UL 508 "Standard for Industrial Control Equipment" (unlimited)

Are devices approved as "Listed Equipment" c<sub>UL</sub> us the approval is also valid for using as "Recognized Component" c<sub>RA</sub> us.

## Approvals

Country	USA, Canada UL	Europe	Russia EAC	CB/CCA-Certificates
Type				
<b>Cam Switches</b> (UL-Listed as MANUAL MOTOR CONTROLLER and suitable as MOTOR DISCONNECT)				
M10	o	o	o	o
M10H	o	o	o	o
M20	o	o	o	o
N20	o	o	o	o
N33F	o	o	o	o
N40	-	o	o	o
N61	-	o	o	o
N80	o	o	o	o
N100	o	o	o	o
N200	o	o	o	o
L400	o	o	-	-

o In standard version approved  
- Not provided for test till now

/ No testing required CE

x In test

## Technical Information

### Degree of protection acc. to IEC 60947-1

Protection ratings are prefixed by the internationally agreed letters IP followed by two digits.

1<sup>st</sup> digit: Pertains to solid objects  
2<sup>nd</sup> digit: Pertains to water.

1 <sup>st</sup> digit	Short description	Definition
1	Protected against solid objects greater than 50 mm body	Excludes solid objects exceeding 50 mm in diameter and protects against contact with live and moving parts by a large surface such as a hand (but not against deliberate access).
2L	Protected against solid objects greater than 12,5 mm and against contact by standard test finger	Excludes solid objects exceeding 12,5 mm in diameter and protects against contact with live and moving parts by a standard test finger or similar objects not exceeding 80 mm in length.
3	Protected against solid objects	Excludes solid objects exceeding 2,5 mm in diameter or thickness. greater than 2,5mm
4	Protected against solid objects greater than 1 mm	Excludes solid objects exceeding 1 mm in diameter or thickness.
5	Dust protected	Prevents ingress of dust in quantities and locations that would interfere with the intended operation of the equipment.
6	Dust tight	Prevents ingress of dust.

2 <sup>nd</sup> digit	Short description	Definition
1	Protected against dripping water	Dripping water (vertically falling drops) shall have no harmful effect.
2	Protected against dripping water when tilted up to 15°	Vertically dripping water shall have no harmful effect when the enclosure is tilted at any angle up to 15° from its normal position.
3	Protected against spraying water	Water falling as a spray at an angle up to 60° from the vertical shall have no harmful effect.
4	Protected against splashing water	Water splashed against the enclosure from any direction shall have no harmful effect.
5	Protected against water jets	Water protected by a nozzle against the enclosure from any direction shall have no harmful effect.
6	Protected against heavy seas	Water from heavy seas or water projected in powerful jets shall not enter the enclosure in harmful quantities.
7	Protected against the effects of immersion	Ingress of water in a harmful quantity shall not be possible when the enclosure is immersed in water under standard conditions of pressure and time.
8	Protected against submersion	No ingress of water.

### Resistance to climatic conditions acc. to IEC60068

Open-type devices are climate-resistant in the constant climate according to IEC60068-2-3 (this is a climate with an ambient temperature of 40°C and an atmospheric humidity of 90 to 95%).

Enclosed devices are climate-resistant in an alternating climate according to IEC 68-2-30 (this is a moist alternating climate with a 24-hour cycle between climates with an ambient temperature of 25°C, and an atmospheric humidity of 95 to 100% and an ambient temperature of 40°C, and an atmospheric humidity of 90 to 96% in the presence of condensation during rises in temperature).

Data are valid up to an altitude of 2000m above sea level.

### Short circuit protection

Back up fuses should be used to protect contactors and starters against short circuits. For starters the device with the smaller admissible fuse at the main and at the control circuit (contactor or thermal overload) determines the fuse size.

After a short circuit devices have to be checked for correct operation. Disconnect power before proceeding with any work on the equipment!

### Mounting positions

No limitations, all kind of positions allowed.

### Suitable ambient temperatures:

Operation	open °C	-40 up to +60
	enclosed °C	-40 up to +40
Storage	°C	-50 up to +90

## Technical Information

### Terminal screws

Devices	Kind of connection				Screw driver	Tightening torque Nm	lb. inch
Type	Screw with washer	Screw with clamp box	2 Screw S	Screw with w. nut			
<b>Cam Switches</b>							
M4H..	M2,5	-	-	-		0,6	5
M10	M3	-	-	-		0,6 - 1,2	5 - 11
M10H	M3,5	-	-	-		0,8 - 1,4	7 - 12
M20, N20, N33F	M4	-	-	-		1,2 - 1,8	11 - 16
N40	M5	-	-	-		2,5 - 3	22 - 26
N61, N80	-	-	2 x M5	-		2,5 - 3	22 - 26
N100	-	-	2 x M6	-		3,5 - 4,5	31 - 40
N200	-	-	-	M10		10	88
L100	-	-	2 x M5	-		2,5 - 3	22 - 26
L160	-	-	-	M8		4 - 6,5	35 - 57
L400	-	-	-	M12		16	140
L600	-	-	-	M16		24	210
L800	-	-	-	M16		24	210
L1200	-	-	-	M16		24	210

# Telux - Cam Switches

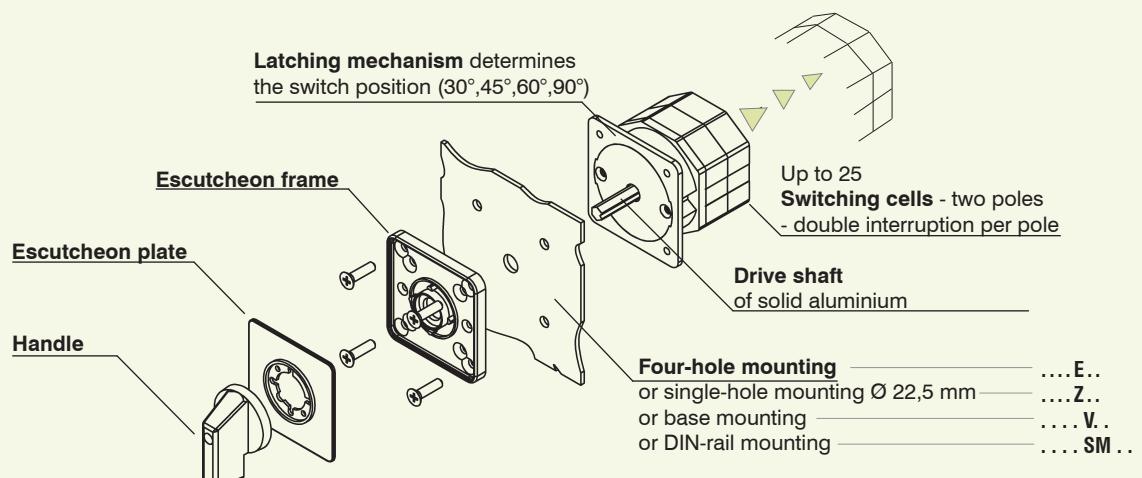
Ratings								Designs			
Typ	Rated current			Motor			Plate	Panel moun. M10H, M20 IP65 IP40	Single hole mount. Ø22,5mm with Plate IP65	without Plate IP65	Flush mount. IP40
	Therm. $I_{th}$ A	open A	AC21 atU <sub>e</sub> V	AC3 3~400V kW	AC23 3~400V A	kW					
M4H	10	10	440	2,2	6	3	30 $\square$	M4H E ●♦	M4H Z ●♦	M4H ZO ●♦	-
M10H	20	20	690	5,5	16	7,5	48 $\square$	M10H E ●♦	M10H Z ●♦	M10H ZO ●♦	-
M10	20	20	440	5,5	16	7,5	48 $\square$	-	-	-	M10 UP ●♦
M20	32	32	690	11	30	15	48 $\square$	M20 E ●♦	M20 Z ●♦	M20 ZO ●♦	-
N20	32	32	690	11	30	15	64 $\square$	N20 E ●♦	-	-	-
N33F	50	50	690	15	45	22	64 $\square$	N33F E ●♦	N33F Z ●♦	-	-
N40	63	63	690	15	45	22	88 $\square$	N40 E ●♦	-	-	-
N61	90	85	690	25	60	30	88 $\square$	N61 E ●♦	-	-	-
N80	115	115	690	30	85	45	88 $\square$	N80 E ●♦	-	-	-
L100	125	125	690	15	45	22	88 $\square$	L100 E ●♦	-	-	-
L160	180	180	690	25	60	30	88 $\square$	L160 E ●♦	-	-	-
N100	150	150	690	40	110	55	132 $\square$	N100 E ●♦	-	-	-
N200	250	250	690	70	140	70	132 $\square$	N200 E ●♦	-	-	-
L400	400	400	690	70	140	70	132 $\square$	L400 E ●♦	-	-	-
L600	600	400	690	70	140	70	132 $\square$	L600 E ●♦	-	-	-
L800	800	400	690	70	140	70	132 $\square$	L800 E ●♦	-	-	-
L1200	1200	400	690	70	140	70	132 $\square$	L1200 E ●♦	-	-	-

## Cam Switches 10 - 250A

Cam switches can be used for virtually all purposes, e.g. as motor, main, control or instrument switches. Over and above the switching programs mentioned in the list, an effectively limitless number of special programs can be implemented.


## Load switch L.. 125 - 1200A

Load switches are primarily employed where resistive or slightly inductive current loads are to be switched on and off, or switching takes place without loading.  
 Load switches are assembled by parallel switching of two or more of cam switch contacts.  
 With customer built main terminal protection, load switch L.. can also be used as main switch.



Designs	DIN-rail mounting IP40	Modular IP40	Plastic enclosed ..P.. IP40 ..PF.. IP65	horizontal, IP65	Motor switch enclosed IP65	Terminal box mounting IP65	Cast enclosed ..G.. IP40 ..GF.. IP65
M10H V ●◆	M10H SM ●◆	M10H SMA ●◆	-	-	M10H PM ●◆	-	-
M20 V ●◆	M20 SM ●◆	M20 SMA ●◆	-	-	-	M10 KE ●◆	-
N20 V ●◆	N20 SM ●◆	-	N20 P(F) ●◆	-	N20 PM ●◆	N20 KE ●◆	N20 G(F) ●◆
N33F V ●◆	N33F SM ●◆	-	N33F P(F) ●◆	-	N33F PM ●◆	N33F KE ●◆	-
N40 V ●◆	-	-	N40 P(F) ●◆	N40 PLF ●◆	-	-	-
N61 V ●◆	-	-	N61 P(F) ●◆	N61 PLF ●◆	-	-	-
N80 V ●◆	-	-	N80 P(F) ●◆	N80 PLF ●◆	-	-	-
L100 V ●◆	-	-	-	-	-	-	-
L160 V ●◆	-	-	-	-	-	-	-
N100 V ●◆	-	-	N100 PF ●◆	-	-	-	-
N200 V ●◆	-	-	N200 PF ●◆	-	-	-	-
L400 V ●◆	-	-	-	-	-	-	-
L600 V ●◆	-	-	-	-	-	-	-
L800 V ●◆	-	-	-	-	-	-	-
L1200 V ●◆	-	-	-	-	-	-	-

## Ordering

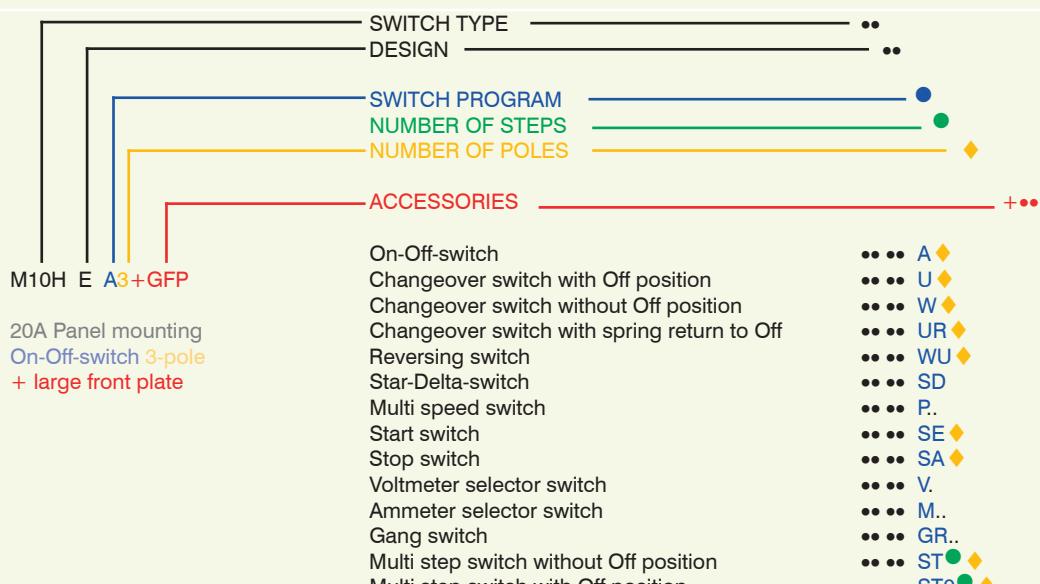

## Panel mounting designs

Switches of the panel mounting designs listed below have protection from front IP40. Where a shaft seal (appendix +WD) is used, the protection is increased to IP54. Use of a moisture proofing cap (appendix +FR) results in an increase in rear protection to IP54. In the standard version, the switches are delivered with a square escutcheon plate and black instrument knob. Forward mounting is possible for some of the design

E switches. The position of the terminals of the standard switches is left and right, at switch M10H the terminals are above and below. Where a knob insert is turned by 90° (can easily be performed after delivery), the position of the terminals can be changed.

**Dimensions** see page 262.



Design	Description	Type appendix	Possible switch sizes				
			M10H	M20	N20 N33F	N40 N61 N80	N100 N200
<b>Panel mounting</b> For installation in control panels, machines and equipment. For panel thickness of over 5mm, an extended switch shaft is required (appendix +VW). Protection from front: M10H, M20 IP65 all others IP40	<b>E</b>		X	X	X	X	X
<b>Central fixing 22,5mm</b> Switch for mounting with standard 22,5mm mounting holes and 1-4mm panel thickness. Protection from front: IP65 Wrench J7049 necessary	<b>Z</b>		X	X	X <sup>2)</sup>	-	-
<b>Central fixing 22,5mm</b> Switch <b>without escutcheon plate</b> , for installation with standard 22,5mm mounting holes and 1-4mm panel thickness. Protection from front: IP65 Wrench J7049 necessary	<b>ZO</b>		X	X	-	-	-
<b>Flush mounting version</b> Switch with white instrument knob, cream escutcheon plate with black markings, for installation in 65mm flush mounting boxes and use of Unitas plate. Supplied with flush mounting box: appendix +UP. Maximum number of cells with: M10 FM box 45mm deep 2 FM box 65mm deep 4	<b>UP</b>		X <sup>1)</sup>	-	-	-	-

1) Switches are delivered with switch type M10

2) For switch types N33F only, max. 3 poles and 3 cells

## Base mounting designs

Switches of the designs listed below have protection from front IP40. When a shaft seal (appendix +WD) is used, the front protection type is increased to IP54. In the standard version, the switches are delivered with a square escutcheon plate and black instrument knob (design SMA with grey cover and grey toggle knob). Door couplings are advisable for switchgear cabinets with hinged doors.

The position of the terminals of the standard switches is left and right, at switch M10H the terminals are above and below. Where a knob insert is turned by 90° (can easily be performed after delivery), the position of the terminals can be changed.

**Dimensions** see page 263.



### Design

#### Description

#### Type appendix

#### Possible switch sizes

#### M10H

#### M20

#### N20 N33F


#### N40 N61 N80

#### N100 N200

#### L...

#### Base mounting

For screw mounting to the back wall or floor of distributor boxes, or of appliances with removable lids. Additional it is necessary to state the installation depth - that is the distance between mounting level of the switch and the inside edge of the door (dimension T).




Door couplings see page 250



#### Snap-on mounting on DIN-rail

Switch with square escutcheon plate, for snap-on mounting on standard DIN EN 50022 rail.

Additional it is necessary to state the installation depth - that is the distance between mounting level of the switch and the inside edge of the door (dimension T).




Door couplings see page 250



#### Snap-on mounting on DIN-rail

with installation cover for standard opening and toggle knob. The lay-out of the terminals of the standard switches is above and below.

Dimensions for Switch types  
M10H SMA .. with 1-3 cells  
M20 SMA .. with 1 or 2 cells



further dimensions see page 263

## Plastic enclosed switches

The switches, which have durable plastic enclosures, are intended for wall mounting or attachment to machines. In the standard version, they are supplied with a light-grey enclosure, square escutcheon plate, black markings on a silver background, and a black instrument knob. Other colours and colour combinations are available for most enclosure types. It is not possible to mount an additional rectangular plate. The enclosure base is equipped with 4 entry glands with heavy-gauge conduit threads (see drawings). In all types of plastic enclosures, two terminals that are connected and insulated from switch column can be provided for a PE conductor (appendix +PE). In addition, 1 or 2 pilot lamps (appendix +SL..) with neon lights can be installed.

**Dimensions** see page 264.











## Cast aluminium enclosed switches

The switches with cast aluminium enclosures are intended for wall mounting or attachment to machines, under heavy-duty operating conditions. The switches are delivered with a square escutcheon plate, black markings on a silver background, and a black instrument knob. It is not possible to mount an additional rectangular plate. The enclosure base makes provision for 2 (4) entry glands with heavy-gauge conduit threads. If a switch with an aluminium enclosure is to be mounted directly on the terminal box of a motor, a 35mm or 50mm hole can be made in the floor of the switch enclosure. Design PLF is the replacement for designs G and GF at types N40 to N80.

**Dimensions** see page 265.

Design	Type appendix	Possible switch sizes							
		M10H	N20	N33F	N40	N61	N80	N100	N200
Description									
<b>Plastic enclosure light grey</b> Protection class IP40 Maximum number of cells	P	X	X	X	X	X	-	-	-
6	6	6	6	6	2				
<b>Plastic enclosure light grey</b> Moisture protection Protection class IP65 Maximum number of cells	PF	X	X	X	X	X	X	X	X
6	6	6	6	6	5	5	4	3	
<b>Plastic enclosure horizontal</b> light grey Moisture protection Protection class IP65 Maximum number of cells	PLF	-	-	-	X	X	X	-	-
-	-	-	-	10	6	6			
<b>Cast enclosure</b> Protection class IP40 Maximum number of cells	G	-	X	-	-	-	-	-	-
-	6								
<b>Cast enclosure</b> Moisture protection Protection class IP65 Maximum number of cells	GF	-	X	-	-	-	-	-	-
-	6								
<b>Terminal box mounting</b> Protection class IP65 These switches are front mounted on a terminal box. The switch cells protrude through a hole into the terminal compartment. Maximum number of cells	KE	X	X	X	-	-	-	-	-
12	12	12							
<b>Plastic motor switch enclosure</b> Moisture protection Protection class IP65 Maximum number of cells	PM	-	X	-	-	-	-	-	-
		6							










## Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch program	Escutcheon plate
<b>On-Off-switches A</b>							
1-pole		60°	1 48 □ 20A 32A	M10H . M20 .	x x x x x <sup>1)</sup> - . A1 x x x x - - . A1		 +003
			64 □ 32A 50A	N20 . N33F .	x - x - x x . A1 x x x - x - . A1		
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - x - x - . A1 x - x - x - x - . A1 x - x - - - . A1		
			132 □ 150A 250A	N100 . N200 .	x - x - - - . A1 x - x - - - . A1		
2-pole		60°	1 48 □ 20A 32A	M10H . M20 .	x x x x x <sup>1)</sup> - . A2 x x x x - - . A2		 +003
			64 □ 32A 50A	N20 . N33F .	x - x - x x . A2 x x x - x - . A2		
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - x - x - . A2 x - x - x - x - . A2 x - x - - - . A2		
			132 □ 150A 250A	N100 . N200 .	x - x - - - . A2 x - x - - - . A2		
3-pole		60°	2 48 □ 20A 32A	M10H . M20 .	x x x x x <sup>1)</sup> - . A3 x x x x - - . A3		 +003
			64 □ 32A 50A	N20 . N33F .	x - x - x x . A3 x x x - x - . A3		
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - x - x - . A3 x - x - x - x - . A3 x - x - - - . A3		
			132 □ 150A 250A	N100 . N200 .	x - x - - - . A3 x - x - - - . A3		
4-pole 4. pole early make		60°	2 48 □ 20A 32A	M10H . M20 .	x x x x x <sup>1)</sup> - . A4 x x x x - - . A4		 +003
			64 □ 32A 50A	N20 . N33F .	x - x - x x . A4 x - x - x - x - . A4		
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - x - x - . A4 x - x - x - x - . A4 x - x - - - . A4		
			132 □ 150A 250A	N100 . N200 .	x - x - - - . A4 x - x - - - . A4		
6-pole		60°	3 48 □ 20A 32A	M10H . M20 .	x x x x x x <sup>1)</sup> - . A6 x x x x x x - - . A6		 +003
			64 □ 32A 50A	N20 . N33F .	x - x - x x x x . A6 x - x - x - x - . A6		
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - x - x - . A6 x - x - x - x - . A6 x - x - - - . A6		
			132 □ 150A 250A	N100 . N200 .	x - x - - - . A6 x - x - - - . A6		

**Ordering example:** AC21 250A panel mounting, On-Off-switch 6-pole, Escutcheon plate OFF - ON N200 E A6+003

1) Plastic enclosed switches are delivered with switch type M10.






## Switching programs

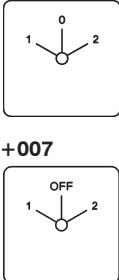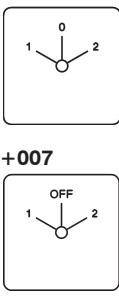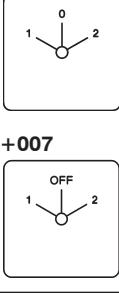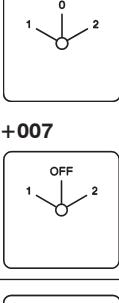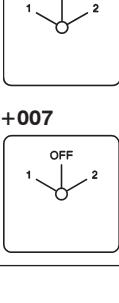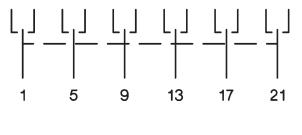Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro-gram	Escutcheon plate
<b>Changover switches U</b>							
1-pole		60°	1	48 □ 20A 32A <b>M10H . M20 .</b>	x x x x x <sup>1)</sup> x x x x - -	.U1 .U1	
				64 □ 32A 50A <b>N20 . N33F .</b>	x - x - x x x x x - x -	.U1 .U1	
				88 □ 63A 90A 115A <b>N40 . N61 . N80 .</b>	x - x - x - x - x - x - x - x - - -	.U1 .U1 .U1	
				132□ 150A 250A <b>N100 . N200 .</b>	x - x - - - x - x - - -	.U1 .U1	
2-pole		60°	2	48 □ 20A 32A <b>M10H . M20 .</b>	x x x x x <sup>1)</sup> x x x x - -	.U2 .U2	
				64 □ 32A 50A <b>N20 . N33F .</b>	x - x - x x x x x - x -	.U2 .U2	
				88 □ 63A 90A 115A <b>N40 . N61 . N80 .</b>	x - x - x - x - x - x - x - x - - -	.U2 .U2 .U2	
				132□ 150A 250A <b>N100 . N200 .</b>	x - x - - - x - x - - -	.U2 .U2	
3-pole		60°	3	48 □ 20A 32A <b>M10H . M20 .</b>	x x x x x <sup>1)</sup> x x x x - -	.U3 .U3	
				64 □ 32A 50A <b>N20 . N33F .</b>	x - x - x x x x x - x -	.U3 .U3	
				88 □ 63A 90A 115A <b>N40 . N61 . N80 .</b>	x - x - x - x - x - x - x - x - - -	.U3 .U3 .U3	
				132□ 150A 250A <b>N100 . N200 .</b>	x - x - - - x - x - - -	.U3 .U3	
4-pole 4. pole early make		60°	4	48 □ 20A 32A <b>M10H . M20 .</b>	x x x x x <sup>1)</sup> x x x x - -	.U4 .U4	
				64 □ 32A 50A <b>N20 . N33F .</b>	x - x - x x x - x - x -	.U4 .U4	
				88 □ 63A 90A 115A <b>N40 . N61 . N80 .</b>	x - x - x - x - x - x - x - x - - -	.U4 .U4 .U4	
				132□ 150A 250A <b>N100 . N200 .</b>	x - x - - - x - x - - -	.U4 .U4	
6-pole		60°	6	48 □ 20A 32A <b>M10H . M20 .</b>	x x x - x <sup>1)</sup> x x x - - -	.U6 .U6	
				64 □ 32A 50A <b>N20 . N33F .</b>	x - x - x x x - x - x -	.U6 .U6	
				88 □ 63A 90A 115A <b>N40 . N61 . N80 .</b>	x - x - x - x - x - x - x - x - - -	.U6 .U6 .U6	
				132□ 150A 250A <b>N100 . N200 .</b>	x - x - - - x - x - - -	.U6 .U6	

**Ordering example:** AC21 250A panel mounting, changeover switch 6-pole, Escutcheon plate 1 - OFF - 2      **N200 E U6+007**

1) Plastic enclosed switches are delivered with switch type M10.














## Switching programs

Description	Wiring diagram	Switching angle ↓ Size ↓ AC21	Number of cells	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch program	Escutcheon plate
<b>Changeover switches without off W</b>							
1-pole	T1T4	60°	1	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . W1 M20 . x x x x - - . W1		
				64 □ 32A 50A	N20 . x - x - x x . W1 N33F . x x x - x - . W1		
				88 □ 63A 90A 115A	N40 . x - x - x - . W1 N61 . x - x - x - . W1 N80 . x - x - - - . W1		
				132□ 150A 250A	N100 . x - x - - - . W1 N200 . x - x - - - . W1		
2-pole	T1T4 T2T5	60°	2	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . W2 M20 . x x x x - - . W2		
				64 □ 32A 50A	N20 . x - x - x x . W2 N33F . x x x - x - . W2		
				88 □ 63A 90A 115A	N40 . x - x - x - . W2 N61 . x - x - x - . W2 N80 . x - x - - - . W2		
				132□ 150A 250A	N100 . x - x - - - . W2 N200 . x - x - - - . W2		
3-pole	T1T4 T2T5 T3T6	60°	3	48□ 20A 32A	M10H . x x x x x <sup>1)</sup> - . W3 M20 . x x x x - - . W3		
				64 □ 32A 50A	N20 . x - x - x x . W3 N33F . x x x - x - . W3		
				88 □ 63A 90A 115A	N40 . x - x - x - . W3 N61 . x - x - x - . W3 N80 . x - x - - - . W3		
				132□ 150A 250A	N100 . x - x - - - . W3 N200 . x - x - - - . W3		
4-pole 4. pole early make	I1 I2 I3 N	60°	4	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . W4 M20 . x x x x - - . W4		
				64 □ 32A 50A	N20 . x - x - x x . W4 N33F . x - x - x - . W4		
				88 □ 63A 90A 115A	N40 . x - x - x - . W4 N61 . x - x - x - . W4 N80 . x - x - - - . W4		
				132□ 150A 250A	N100 . x - x - - - . W4 N200 . x - x - - - . W4		
6-pole	4 2 8 6 12 10 16 14 20 18 24 22 1 5 9 13 17 21	60°	6	48 □ 20A 32A	M10H . x x x - x <sup>1)</sup> - . W6 M20 . x x x - - - . W6		
				64 □ 32A 50A	N20 . x - x - x x . W6 N33F . x - x - x - . W6		
				88 □ 63A 90A 115A	N40 . x - x - x - . W6 N61 . x - x - x - . W6 N80 . x - x - - - . W6		
				132□ 150A 250A	N100 . x - x - - - . W6 N200 . x - x - - - . W6		

**Ordering example:** AC21 250A panel mounting, changeover switch without off 6-pole, **N200 E W6**

1) Plastic enclosed switches are delivered with switch type M10.

## Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
<b>Reversing switches WU</b>							
2-pole		60°	2	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . WU2 M20 . x x x x - - . WU2		 +007
				64 □ 32A 50A	N20 . x - x - x x . WU2 N33F . x x x - x - . WU2		
				88 □ 63A 90A 115A	N40 . x - x - x - . WU2 N61 . x - x - x - . WU2 N80 . x - x - - - . WU2		
				132 □ 150A 250A	N100 . x - x - - - . WU2 N200 . x - x - - - . WU2		
2-pole without off cross switch		60°	2	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . WK2 M20 . x x x x - - . WK2		
				64 □ 32A 50A	N20 . x - x - x x . WK2 N33F . x x x - x - . WK2		
				88 □ 63A 90A 115A	N40 . x - x - x - . WK2 N61 . x - x - x - . WK2 N80 . x - x - - - . WK2		
				132 □ 150A 250A	N100 . x - x - - - . WK2 N200 . x - x - - - . WK2		
2-pole with spring return from both sides to off		30°	2	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . WU2R2 M20 . x x x x - - . WU2R2		
				64 □ 32A	N20 . x - x - x x . WU2R2 N33F . x x x - x - . WU2R2		
				88 □ 63A	N40 . x - x - x - . WU2R2		
2-pole position 1 latched position 2 with spring return to off		60°+30°	2	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . WU2R1 M20 . x x x x - - . WU2R1		
				64 □ 32A	N20 . x - x - x x . WU2R1 N33F . x x x - x - . WU2R1		
				88 □ 63A	N40 . x - x - x - . WU2R1		
3-pole		60°	3	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . WU3 M20 . x x x x - - . WU3		 +007
				64 □ 32A 50A	N20 . x - x - x x . WU3 N33F . x x x - x - . WU3		
				88 □ 63A 90A 115A	N40 . x - x - x - . WU3 N60 . x - x - x - . WU3 N80 . x - x - - - . WU3		
				132 □ 150A 250A	N100 . x - x - - - . WU3 N200 . x - x - - - . WU3		
3-pole with spring return from both sides to off		30°	3	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . WU3R2 M20 . x x x x - - . WU3R2		 +007
				64 □ 32A 50A	N20 . x - x - x x . WU3R2 N33F . x x x - x - . WU3R2		
				88 □ 63A	N40 . x - x - x - . WU3R2		
3-pole position 1 latched position 2 with spring return to off		60°+30°	3	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . WU3R1 M20 . x x x x - - . WU3R1		
				64 □ 32A 50A	N20 . x - x - x x . WU3R1 N33F . x - x - x - . WU3R1		
				88 □ 63A	N40 . x - x - x - . WU3R1		

**Ordering example:** AC21 63A base mounting, reversing switch 3-pole, position 2 with spring to off **N40 V WU3R1**

1) Plastic enclosed switches are delivered with switch type M10.

## Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch program	Escutcheon plate
<b>Star-Delta switches SD</b>							
1 rotary direction		60°	4 48 □ 20A 32A	M10H . M20 .	x x x x x x x x x -	x <sup>1)</sup> - . SD . SD	
			64 □ 32A 50A	N20 . N33F .	x - x - x - x -	x x . SD x - . SD	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - x - x -	x - . SD x - . SD	
			132 □ 150A 250A	N100 . N200 .	x - x - x - x -	- - . SD - - . SD	
both rotary directions		45°	5 48 □ 20A 32A	M10H . M20 .	x x x x x x x x x -	x <sup>1)</sup> - . SDR . SDR	
			64 □ 32A 50A	N20 . N33F .	x - x - x - x -	x x . SDR x - . SDR	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - x - x -	x - . SDR x - . SDR	
			132 □ 150A 250A	N100 . N200 .	x - x - x - x -	- - . SDR - - . SDR	
1 rotary direction spring return from λ to off		60°	4 48 □ 20A 32A	M10H . M20 .	x x x x x x x x x -	x <sup>1)</sup> - . SRD . SRD	
			64 □ 32A 50A	N20 . N33F .	x - x - x - x -	x x . SRD x - . SRD	
			88 □ 63A 90A 115A	N40 . N60 . N80 .	x - x - x - x -	x - . SRD x - . SRD	
			132 □ 150A 250A	N100 . N200 .	x - x - x - x -	- - . SRD - - . SRD	
1 rotary direction with clockwise operation and backswitch interlock		60°	5 48 □ 20A 32A	M10H . M20 .	x x x x x x x x x -	x <sup>1)</sup> - . SDRU . SDRU	
			64 □ 32A 50A	N20 . N33F .	x - x - x - x -	x x . SDRU x - . SDRU	
			88 □ 63A 90A 115A	N40 . N60 . N80 .	x - x - x - x -	x - . SDRU x - . SDRU	
			132 □ 150A 250A	N100 . N200 .	x - x - x - x -	- - . SDRU - - . SDRU	
Star-Delta selector switch		60°	4 48 □ 20A 32A	M10H . M20 .	x x x x x x x x x -	x <sup>1)</sup> - . SDU . SDU	
			64 □ 32A 50A	N20 . N33F .	x - x - x - x -	x x . SDU x - . SDU	
			88 □ 63A 90A 115A	N40 . N60 . N80 .	x - x - x - x -	x - . SDU x - . SDU	
			132 □ 150A 250A	N100 . N200 .	x - x - x - x -	- - . SDU - - . SDU	

**Ordering example:** AC21 32A cast enclosed, star-delta selector switch

1) Plastic enclosed switches are delivered with switch type M10.

**N20 G SDU**

## Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
<b>Star-Delta switches SD</b>							
with double outfeed phases for use with manual motor starter		60°	4	M10H . M20 .	x x x x x <sup>1)</sup> - . x x x x - - .	SDMO SDMO	
			64 □ 32A 64 □ 50A	N20 . N33F .	x - x - x x . x - x - x - .	SDMO SDMO	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - x - . x - x - x - . x - x - - - .	SDMO SDMO SDMO	
			132 □ 150A 250A	N100 . N200 .	x - x - - - . x - x - - - .	SDMO SDMO	
with auxiliary contacts for contactor control, without main contacts, automatic zero setting in event of mains breakdown		90°	4	M10H . M20 .	x x x x x <sup>1)</sup> - . x x x x - - .	SDJ1 SDJ1	
			64 □ 32A 64 □ 50A	N20 . N33F .	x - x - x x . x - x - x - .	SDJ1 SDJ1	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - x - . x - x - x - . x - x - - - .	SDJ1 SDJ1 SDJ1	
			132 □ 150A 250A	N100 . N200 .	x - x - - - . x - x - - - .	SDJ1 SDJ1	
with auxiliary contacts for contactor control, without main contacts, automatic zero setting in event of mains breakdown, spring return to		90°+30°	4	M10H . M20 .	x x x x x <sup>1)</sup> - . x x x x - - .	SDJ2 SDJ2	
			64 □ 32A 64 □ 50A	N20 . N33F .	x - x - x x . x - x - x - .	SDJ2 SDJ2	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - x - . x - x - x - . x - x - - - .	SDJ2 SDJ2 SDJ2	
			132 □ 150A 250A	N100 . N200 .	x - x - - - . x - x - - - .	SDJ2 SDJ2	
as type SDJ1 but for both rotary directions		60°	7	M10H . M20 .	x x x - - - . x x x - - - .	SDRJ1 SDRJ1	
			64 □ 32A 64 □ 50A	N20 . N33F .	x - x - x x . x - x - - - .	SDRJ1 SDRJ1	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - x - . x - x - - - . x - x - - - .	SDRJ1 SDRJ1 SDRJ1	
			132 □ 150A 250A	N100 . N200 .	x - x - - - . x - x - - - .	SDRJ1 SDRJ1	
with brake position (counter current braking) brake position is a momentary operation		45°+30°	5	M10H . M20 .	x x x x x <sup>1)</sup> - . x x x x - - .	SDB SDB	
			64 □ 32A 64 □ 50A	N20 . N33F .	x - x - x x . x - x - x - .	SDB SDB	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - x - . x - x - x - . x - x - - - .	SDB SDB SDB	
			132 □ 150A 250A	N100 . N200 .	x - x - - - . x - x - - - .	SDB SDB	

**Ordering example:** AC21 250A panel mounting star-delta switch with brake position

1) Plastic enclosed switches are delivered with switch type M10.

**N200 E SDB**

## Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch program	Escutcheon plate	
<b>Split phase switches HP</b>								
for starting up single-phase motors with split-phase, spring return from START to Off		30°+60°	2 48 □ 64 □ 88 □	20A 32A 50A 63A	M10H . M20 . N20 . N33F . N40 .	x x x x x <sup>1)</sup> - . x x x x - - . x - x - x x . x - x - x - . x - x - x - .	. HP1 . HP1 . HP1 . HP1 . HP1	
for starting up single-phase motors with split-phase, spring return from START to 1		90°+30°	2 48 □ 64 □ 88 □	20A 32A 50A 63A	M10H . M20 . N20 . N33F . N40 .	x x x x x <sup>1)</sup> - . x x x x - - . x - x - x x . x - x - x - . x - x - x - .	. HP2 . HP2 . HP2 . HP2 . HP2	
for starting up single-phase motors with split-phase, both rotary directions		60°+30°	3 48 □ 64 □ 88 □	20A 32A 50A 63A	M10H . M20 . N20 . N33F . N40 .	x x x x x <sup>1)</sup> - . x x x x - - . x - x - x x . x - x - x - . x - x - x - .	. HPR1 . HPR1 . HPR1 . HPR1 . HPR1	
as type HPR1 with starting and phase-shifting capacitor		60°+30°	4 48 □ 64 □ 88 □	20A 32A 50A 63A	M10H . M20 . N20 . N33F . N40 .	x x x x x <sup>1)</sup> - . x x x x - - . x - x - x x . x - x - x - . x - x - x - .	. HPR2 . HPR2 . HPR2 . HPR2 . HPR2	

**Ordering example:** AC21 63A panel mounting, split phase switch, both rotary directions **N40 E HPR1**

1) Plastic enclosed switches are delivered with switch type M10.

## Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
<b>Multi speed switches P</b>							
1 Dahlander winding 1 rotary direction	<p>L2 1W 2W 1U 2U 0 1 X X X X 2 X X X X X X 2V 1V L3 L1</p>	60°	4	M10H . M20 .	x x x x x <sup>1)</sup> - . x x x x - - .	P61 P61	
1 Dahlander winding 1 rotary direction	<p>L2 1W 2W 1U 2U 0 1 X X X X 2 X X X X X X 2V 1V L3 L1</p>	60°	4	N20 . N33F .	x - x - x x . x - x - x - .	P61 P61	
1 Dahlander winding 1 rotary direction	<p>L2 1W 2W 1U 2U 0 1 X X X X 2 X X X X X X 2V 1V L3 L1</p>	60°	4	N40 . N61 . N80 .	x - x - x - . x - x - x - . x - x - - - .	P61 P61 P61	
1 Dahlander winding 1 rotary direction	<p>L2 1W 2W 1U 2U 0 1 X X X X 2 X X X X X X 2V 1V L3 L1</p>	60°	4	N100 . N200 .	x - x - - - . x - x - - - .	P61 P61	
1 Dahlander winding both rotary directions	<p>2W 2U 1U 2V 2 X X X X X X X X X X 1 X X X X X X X X X X 0 1 X X X X X X X X X X 2 X X X X X X X X X X L2 L1 1W 2V 1V L3</p>	60°	7	M10H . M20 .	x x x - - - . x x x - - - .	P61R P61R	
1 Dahlander winding 1 rotary direction, clockwise operation	<p>L2 1U 1W 2U 2W 0 1 X X X X 2 X X X X X X 0 1 X X X X X X 2 X X X X X X X X 2V 1V L1 L3</p>	60°	5	M10H . M20 .	x x x x x <sup>1)</sup> - . x x x x - - .	P61RU P61RU	
1 Dahlander winding 1 rotary direction, with auxiliary contacts for contactor control	<p>L3' 1V 2V L1' 0 0 1 X X X X 2 X X X X X X 2W 1W L2' 2U 1U 1 2</p>	60°	5	M10H . M20 .	x x x x x <sup>1)</sup> - . x x x x - - .	P61J P61J	
			64 □	N20 . N33F .	x - x - x x . x - x - x - .	P61J P61J	
			88 □	N40 . N61 . N80 .	x - x - x - . x - x - x - . x - x - - - .	P61J P61J P61J	
			132 □	N100 . N200 .	x - x - - - . x - x - - - .	P61J P61J	

**Ordering example:** AC21 32A cast enclosed, multi speed switch, 1 Dahlander winding, 1 rotary direction

**N20 G P61**

1) Plastic enclosed switches are delivered with switch type M10.

## Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch program	Escutcheon plate	
<b>Multi speed switches P</b>								
open Dahlander winding 1 rotary direction low speed with star-delta-start		45°	6	48 □ 20A 32A 64 □ 32A 50A 88 □ 63A 90A 115A 132 □ 150A 250A	M10H . M20 . N20 . N33F . N40 . N61 . N80 . N100 . N200 .	x x x - x <sup>1)</sup> - . P91 x x x - - - . P91 x - x - x x . P91 x - x - x - . P91 x - x - - - . P91 x - x - - - . P91		
open Dahlander winding both rotary directions low speed with star-delta-start		30°	8	48 □ 20A 32A 64 □ 32A 50A 88 □ 63A 90A 115A 132 □ 150A 250A	M10H . M20 . N20 . N33F . N40 . N61 . N80 . N100 . N200 .	x x x - - - . P91R x x x - - - . P91R x - x - x - . P91R x - x - - - . P91R x - x - - - . P91R x - x - - - . P91R		
open Dahlander winding 1 rotary direction, low speed with star-delta-start, with additional start position (starting resistor)		30°	7	48 □ 20A 32A 64 □ 32A 50A 88 □ 63A 90A 115A 132 □ 150A 250A	M10H . M20 . N20 . N33F . N40 . N61 . N80 . N100 . N200 .	x x x - - - . P91W x x x - - - . P91W x - x - x - . P91W x - x - - - . P91W x - x - - - . P91W x - x - - - . P91W		

**Ordering example:** AC21 250A panel mounting, multi speed switch, 1 rotary direction, low speed with star-delta-start **N200 E P91**

1) Plastic enclosed switches are delivered with switch type M10.

## Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
<b>Multi speed switches P</b>							
2 separate windings 1 rotary direction	<p>1W 2W 1V 2V 1U 2U 0 1 X X X X 1 X X X X X 2 X X X X X L3 L2 L1</p>	60°	3	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . P63 M20 . x x x x - - . P63		
	<p>1W 2W 1V 2V 1U 2U 1 X X X X X 0 X X X X X 2 X X X X X L3 L2 L1</p>	60°	3	64 □ 32A 50A	N20 . x - x - x x . P63 N33F . x - x - x - . P63		
	<p>1W 2W 1V 2V 1U 2U 1 X X X X X 0 X X X X X 2 X X X X X L3 L2 L1</p>	60°	3	88 □ 63A 90A 115A	N40 . x - x - x - . P63 N61 . x - x - x - . P63 N80 . x - x - - - . P63		
	<p>1W 2W 1V 2V 1U 2U 1 X X X X X 0 X X X X X 2 X X X X X L3 L2 L1</p>	60°	3	132 □ 150A 250A	N100 . x - x - - - . P63 N200 . x - x - - - . P63		
2 separate windings 1 rotary direction	<p>1W 2W 1V 2V 1U 2U 1 X X X X X 0 X X X X X 2 X X X X X L3 L2 L1</p>	60°	3	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . P64 M20 . x x x x - - . P64		
	<p>1W 2W 1V 2V 1U 2U 1 X X X X X 0 X X X X X 2 X X X X X L3 L2 L1</p>	60°	3	64 □ 32A 50A	N20 . x - x - x x . P64 N33F . x - x - x - . P64		
	<p>1W 2W 1V 2V 1U 2U 1 X X X X X 0 X X X X X 2 X X X X X L3 L2 L1</p>	60°	3	88 □ 63A 90A 115A	N40 . x - x - x - . P64 N61 . x - x - x - . P64 N80 . x - x - - - . P64		
	<p>1W 2W 1V 2V 1U 2U 1 X X X X X 0 X X X X X 2 X X X X X L3 L2 L1</p>	60°	3	132 □ 150A 250A	N100 . x - x - - - . P64 N200 . x - x - - - . P64		
2 separate windings both rotary directions	<p>2U 2W 1U 1V 2V 1W 2 X X X X X X 1 X X X X X X 0 X X X X X X 1 X X X X X X 2 X X X X X X L1 L2 L3</p>	60°	5	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . P66 M20 . x x x x - - . P66		
	<p>2U 2W 1U 1V 2V 1W 2 X X X X X X 1 X X X X X X 0 X X X X X X 1 X X X X X X 2 X X X X X X L1 L2 L3</p>	60°	5	64 □ 32A 50A	N20 . x - x - x x . P66 N33F . x - x - x - . P66		
	<p>2U 2W 1U 1V 2V 1W 2 X X X X X X 1 X X X X X X 0 X X X X X X 1 X X X X X X 2 X X X X X X L1 L2 L3</p>	60°	5	88 □ 63A 90A 115A	N40 . x - x - x - . P66 N61 . x - x - x - . P66 N80 . x - x - - - . P66		
	<p>2U 2W 1U 1V 2V 1W 2 X X X X X X 1 X X X X X X 0 X X X X X X 1 X X X X X X 2 X X X X X X L1 L2 L3</p>	60°	5	132 □ 150A 250A	N100 . x - x - - - . P66 N200 . x - x - - - . P66		
2 separate windings 1 opened 1 rotary direction	<p>1U 2U 1V 2V 1W 2V2 0 X X X X X X 1 X X X X X X 2 X X X X X X L1 L2 L3 2W</p>	60°	4	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . P71 M20 . x x x x - - . P71		
	<p>1U 2U 1V 2V 1W 2V2 0 X X X X X X 1 X X X X X X 2 X X X X X X L1 L2 L3 2W</p>	60°	4	64 □ 32A 50A	N20 . x - x - x x . P71 N33F . x - x - x - . P71		
	<p>1U 2U 1V 2V 1W 2V2 0 X X X X X X 1 X X X X X X 2 X X X X X X L1 L2 L3 2W</p>	60°	4	88 □ 63A 90A 115A	N40 . x - x - x - . P71 N61 . x - x - x - . P71 N80 . x - x - - - . P71		
	<p>1U 2U 1V 2V 1W 2V2 0 X X X X X X 1 X X X X X X 2 X X X X X X L1 L2 L3 2W</p>	60°	4	132 □ 150A 250A	N100 . x - x - - - . P71 N200 . x - x - - - . P71		
2 separate windings 1 rotary direction low speed with star-delta-start	<p>L1 L2 1V2 L3 0 X X X X X X 1 X X X X X X 2 X X X X X X 2U 1U1 2V 1V1 2U2 1W1 2W 2U 1U1 2V 1V1 2U2 1W1 2W</p>	45°	6	48 □ 20A 32A	M10H . x x x - x <sup>1)</sup> - . P96 M20 . x x x - - - . P96		
	<p>L1 L2 1V2 L3 0 X X X X X X 1 X X X X X X 2 X X X X X X 2U 1U1 2V 1V1 2U2 1W1 2W 2U 1U1 2V 1V1 2U2 1W1 2W</p>	45°	6	64 □ 32A 50A	N20 . x - x - x x . P96 N33F . x - x - x - . P96		
	<p>L1 L2 1V2 L3 0 X X X X X X 1 X X X X X X 2 X X X X X X 2U 1U1 2V 1V1 2U2 1W1 2W 2U 1U1 2V 1V1 2U2 1W1 2W</p>	45°	6	88 □ 63A 90A 115A	N40 . x - x - x - . P96 N61 . x - x - x - . P96 N80 . x - x - - - . P96		
	<p>L1 L2 1V2 L3 0 X X X X X X 1 X X X X X X 2 X X X X X X 2U 1U1 2V 1V1 2U2 1W1 2W 2U 1U1 2V 1V1 2U2 1W1 2W</p>	45°	6	132 □ 150A 250A	N100 . x - x - - - . P96 N200 . x - x - - - . P96		

**Ordering example:** AC21 250A panel mounting, multi speed switch, 2 separate windings, low speed with star-delta-start N200 E P96

1) Plastic enclosed switches are delivered with switch type M10.

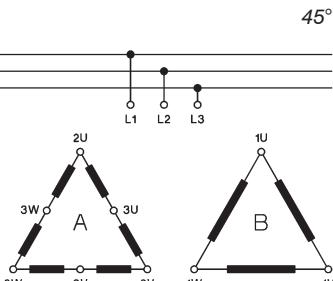

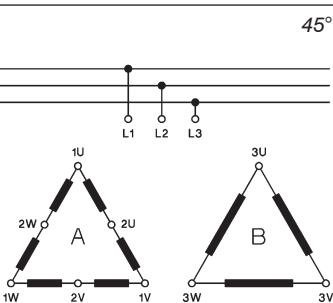

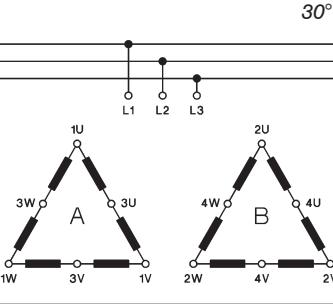


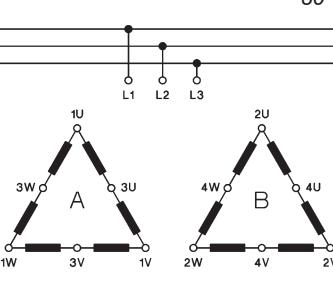

## Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch program	Escutcheon plate
<b>Multi speed switches P</b>							
2 separate windings 1 rotary direction both speeds with star-delta-start		45°	8	48 □ 20A 32A 64 □ 32A 50A 88 □ 63A 90A 115A 132 □ 150A 250A	M10H . x x x - - - . P122 M20 . x x x - - - . P122 N20 . x - x - x - . P122 N33F . x - x - - - . P122 N40 . x - x - x - . P122 N61 . x - x - - - . P122 N80 . x - x - - - . P122 N100 . x - x - - - . P122 N200 . x - x - - - . P122	. P122 . P122 . P122 . P122 . P122 . P122 . P122 . P122 . P122	
1 Dahlander winding A 1 normal winding B 3 speeds 1 rotary direction 0-A△-B△oder ↳-A ↳		45°	6	48 □ 20A 32A 64 □ 32A 50A 88 □ 63A 90A 115A 132 □ 150A 250A	M10H . x x x - x¹ - . P93 M20 . x x x - - - . P93 N20 . x - x - x x . P93 N33F . x - x - x - . P93 N40 . x - x - x - . P93 N61 . x - x - x - . P93 N80 . x - x - - - . P93 N100 . x - x - - - . P93 N200 . x - x - - - . P93	. P93 . P93 . P93 . P93 . P93 . P93 . P93 . P93 . P93	
+127							
1 Dahlander winding A 1 normal winding B 3 speeds 1 rotary direction 0-B△oder ↳-A△-A ↳		45°	6	48 □ 20A 32A 64 □ 32A 50A 88 □ 63A 90A 115A 132 □ 150A 250A	M10H . x x x - x¹ - . P94 M20 . x x x - - - . P94 N20 . x - x - x - . P94 N33F . x - x - x - . P94 N40 . x - x - x - . P94 N61 . x - x - x - . P94 N80 . x - x - - - . P94 N100 . x - x - - - . P94 N200 . x - x - - - . P94	. P94 . P94 . P94 . P94 . P94 . P94 . P94 . P94 . P94	
+127							
1 Dahlander winding A 1 normal winding B 3 speeds 1 rotary direction 0-A△-A ↳-B△oder ↳		45°	6	48 □ 20A 32A 64 □ 32A 50A 88 □ 63A 90A 115A 132 □ 150A 250A	M10H . x x x - x¹ - . P95 M20 . x x x - - - . P95 N20 . x - x - x x . P95 N33F . x - x - x - . P95 N40 . x - x - x - . P95 N61 . x - x - x - . P95 N80 . x - x - - - . P95 N100 . x - x - - - . P95 N200 . x - x - - - . P95	. P95 . P95 . P95 . P95 . P95 . P95 . P95 . P95 . P95	
+127							
1 Dahlander winding A 1 normal winding B 3 speeds 1 rotary direction 0-A△-A ↳-B△oder ↳		45°	6	48 □ 20A 32A 64 □ 32A 50A 88 □ 63A 90A 115A 132 □ 150A 250A	M10H . x x x - x¹ - . P95 M20 . x x x - - - . P95 N20 . x - x - x x . P95 N33F . x - x - x - . P95 N40 . x - x - x - . P95 N61 . x - x - x - . P95 N80 . x - x - - - . P95 N100 . x - x - - - . P95 N200 . x - x - - - . P95	. P95 . P95 . P95 . P95 . P95 . P95 . P95 . P95 . P95	
+127							
1 Dahlander winding A 1 normal winding B 3 speeds both rotary directions		45°	9	48 □ 20A 32A 64 □ 32A 50A 88 □ 63A 90A 115A 132 □ 150A 250A	M10H . x x x - - - . P93R M20 . x x x - - - . P93R N20 . x - x - - - . P93R N33F . x - x - - - . P93R N40 . x - x - - - . P93R N61 . x - x - - - . P93R N80 . x - x - - - . P93R N100 . x - x - - - . P93R N200 . x - x - - - . P93R	. P93R . P93R . P93R . P93R . P93R . P93R . P93R . P93R . P93R	

**Ordering example:** AC21 250A panel mounting, multi speed switch, 1 Dahlander winding A,  
1 normal winding B, 3 speeds, both rotary directions N200 E P93R

1) Plastic enclosed switches are delivered with switch type M10.










## Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate	
<b>Multi speed switches P</b>								
1 Dahlander winding A 1 normal winding B 3 speeds both rotary directions		45°	9	48 □ 20A 32A 64 □ 32A 50A 88 □ 63A 90A 115A 132 □ 150A 250A	M10H . M20 . N20 . N33F . N40 . N61 . N80 . N100 . N200 .	x x x - - - . x x x - - - . x - x - - - .	P94R P94R P94R P94R P94R P94R P94R P94R P94R	
1 Dahlander winding A 1 normal winding B 3 speeds both rotary directions		45°	8	48 □ 20A 32A 64 □ 32A 50A 88 □ 63A 90A 115A 132 □ 150A 250A	M10H . M20 . N20 . N33F . N40 . N61 . N80 . N100 . N200 .	x x x - - - . x x x - - - . x - x - x - . x - x - - - .	P95R P95R P95R P95R P95R P95R P95R P95R P95R	
2 Dahlander windings 4 speeds 1 rotary direction 0-A Δ-B Δ-A Δ-B Δ		30°	8	48 □ 20A 32A 64 □ 32A 50A 88 □ 63A 90A 115A 132 □ 150A 250A	M10H . M20 . N20 . N33F . N40 . N61 . N80 . N100 . N200 .	x x x - - - . x x x - - - . x - x - x - . x - x - - - .	P124 P124 P124 P124 P124 P124 P124 P124 P124	 +112 
2 Dahlander windings 4 speeds both rotary directions		30°	12	48 □ 20A 32A 64 □ 32A 50A 88 □ 63A 90A 115A 132 □ 150A 250A	M10H . M20 . N20 . N33F . N40 . N61 . N80 . N100 . N200 .	x x x - - - . x x x - - - . x - x - - - .	P124R P124R P124R P124R P124R P124R P124R P124R P124R	

**Ordering example:** AC21 250A Base mounting, multi speed switch, 2 Dahlander windings, 4 speeds, 1 rotary direction

N200 V P124

## Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch program	Escutcheon plate
<b>Changeover switches with spring return to off UR</b>							
1-pole	T1 T4 	30°	1 48 □ 20A 32A	M10H . M20 .	x x x x x <sup>1)</sup> - . x x x x - - .	UR1 UR1	 +264
			64 □ 32A 50A	N20 . N33F .	x - x - x x . x - x - x - .	UR1 UR1	
			88 □ 63A	N40 .	x - x - x - .	UR1	
2-pole	T1 T4 T2 T5 	30°	2 48 □ 20A 32A	M10H . M20 .	x x x x x <sup>1)</sup> - . x x x x - - .	UR2 UR2	 +264
			64 □ 32A 50A	N20 . N33F .	x - x - x x . x - x - x - .	UR2 UR2	
			88 □ 63A	N40 .	x - x - x - .	UR2	
3-pole	T1 T4 T2 T5 T3 T6 	30°	3 48 □ 20A 32A	M10H . M20 .	x x x x x <sup>1)</sup> - . x x x x - - .	UR3 UR3	 +264
			64 □ 32A 50A	N20 . N33F .	x - x - x x . x - x - x - .	UR3 UR3	
			88 □ 63A	N40 .	x - x - x - .	UR3	
<b>Changeover switches with 1 latched and 1 momentary position UK</b>							
1-pole position 1 latched position 2 with spring return	T1 T4 	60°+30°	1 48 □ 20A 32A	M10H . M20 .	x x x x x <sup>1)</sup> - . x x x x - - .	UK1 UK1	
			64 □ 32A 50A	N20 . N33F .	x - x - x x . x - x - x - .	UK1 UK1	
			88 □ 63A	N40 .	x - x - x - .	UK1	
2-pole position 1 latched position 2 with spring return	T1 T4 T2 T5 	60°+30°	2 48 □ 20A 32A	M10H . M20 .	x x x x x <sup>1)</sup> - . x x x x - - .	UK2 UK2	
			64 □ 32A 50A	N20 . N33F .	x - x - x x . x - x - x - .	UK2 UK2	
			88 □ 63A	N40 .	x - x - x - .	UK2	
3-pole position 1 latched position 2 with spring return	T1 T4 T2 T5 T3 T6 	60°+30°	3 48 □ 20A 32A	M10H . M20 .	x x x x x <sup>1)</sup> - . x x x x - - .	UK3 UK3	
			64 □ 32A 50A	N20 . N33F .	x - x - x x . x - x - x - .	UK3 UK3	
			88 □ 63A	N40 .	x - x - x - .	UK3	

**Ordering example:** AC21 63A panel mounting, changeover switch, position 1 latched, position 2 with spring return, 3-pole: N40 E UK3

1) Plastic enclosed switches are delivered with switch type M10.

## Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
-------------	----------------	-----------------	-------------------------------------	------	---	---------------------	---------------------

### Double throw switches with spring return to off WR

1-pole		30°	1 48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . W1R M20 . x x x x - - . W1R	
			64 □ 32A 50A	N20 . x - x - x x . W1R N33F . x - x - x - . W1R	
			88 □ 63A	N40 . x - x - x - . W1R	
2-pole		30°	2 48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . W2R M20 . x x x x - - . W2R	
			64 □ 32A 50A	N20 . x - x - x x . W2R N33F . x - x - x - . W2R	
			88 □ 63A	N40 . x - x - x - . W2R	
3-pole		30°	3 48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . W3R M20 . x x x x - - . W3R	
			64 □ 32A 50A	N20 . x - x - x x . W3R N33F . x - x - x - . W3R	
			88 □ 63A	N40 . x - x - x - . W3R	

### Start-Stop switches S

Start-switch, 1-pole		30°	1 48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . SE M20 . x x x x - - . SE	
			64 □ 32A 50A	N20 . x - x - x x . SE N33F . x - x - x - . SE	
Start-switch, 2-pole		30°	1 48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . S2E M20 . x x x x - - . S2E	
			64 □ 32A 50A	N20 . x - x - x x . S2E N33F . x - x - x - . S2E	
Start-switch, 3-pole		30°	2 48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . S3E M20 . x x x x - - . S3E	
			64 □ 32A 50A	N20 . x - x - x x . S3E N33F . x - x - x - . S3E	

**Bestellbeispiel:** AC21 50A base mounting, Start-switch, 3-pole

1) Plastic enclosed switches are delivered with switch type M10.

**N33F V S3E**

## Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch program	Escutcheon plate
<b>Start-Stop switches S</b>							
Stop-switch, 1-pole		30°	1 48 □ 20A 32A  64 □ 32A 50A  88 □ 63A	M10H . M20 .	x x x x x x x x x -	x <sup>1)</sup> - . SA . SA	
				N20 . N33F .	x - x - - x - x - -	x x . SA x - . SA	
				N40 .	x - x - -	x - . SA	
Stop-switch, 2-pole		30°	1 48 □ 20A 32A  64 □ 32A 50A  88 □ 63A	M10H . M20 .	x x x x x x x x x -	x <sup>1)</sup> - . S2A . S2A	
				N20 . N33F .	x - x - - x - x - -	x x . S2A x - . S2A	
				N40 .	x - x - -	x - . S2A	
Stop-switch, 3-pole		30°	2 48 □ 20A 32A  64 □ 32A 50A  88 □ 63A	M10H . M20 .	x x x x x x x x x -	x <sup>1)</sup> - . S3A . S3A	
				N20 . N33F .	x - x - - x - x - -	x x . S3A x - . S3A	
				N40 .	x - x - -	x - . S3A	
Start-Stop-switch, 1-pole		30°	1 48 □ 20A 32A  64 □ 32A 50A	M10H . M20 .	x x x x x x x x x -	x <sup>1)</sup> - . SEA . SEA	
				N20 . N33F .	x - x - - x - x - -	x x . SEA x - . SEA	
Start-Stop-switch, 1-pole position START with spring return to 1		90° + 30°	1 48 □ 20A 32A  64 □ 32A 50A	M10H . M20 .	x x x x x x x x x -	x <sup>1)</sup> - . S392 . S392	
				N20 . N33F .	x - x - - x - x - -	x x . S392 x - . S392	
Start-Stop-switch, 1-pole for reversing contactors		60° + 30°	2 48 □ 20A 32A  64 □ 32A 50A	M10H . M20 .	x x x x x x x x x -	x <sup>1)</sup> - . S2EA . S2EA	
				N20 . N33F .	x - x - - x - x - -	x x . S2EA x - . S2EA	
Start-Stop-switch, 1-pole for reversing contactors with limit switches		30°	2 48 □ 20A 32A  64 □ 32A 50A	M10H . M20 .	x x x x x x x x x -	x <sup>1)</sup> - . S22 . S22	
				N20 . N33F .	x - x - - x - x - -	x x . S22 x - . S22	

**Ordering example:** AC21 50A panel mounting, Start-Stop-switch,1-pole for reversing contactors

N33F E S2EA

1) Plastic enclosed switches are delivered with switch type M10.

## Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
<b>Voltmeter selector switches V</b>							
<b>3 line voltages</b>		45°	2 48 □ 20A 32A	M10H . M20 .	x x x x x <sup>1)</sup> - . V3 x x x x - - . V3		
			64 □ 32A 50A	N20 . N33F .	x - x - x x . V3 x x x - x - . V3		
<b>3 phase voltages</b>		45°	2 48 □ 20A 32A	M10H . M20 .	x x x x x <sup>1)</sup> - . V0 x x x x - - . V0		
			64 □ 32A 50A	N20 . N33F .	x - x - x x . V0 x x x - x - . V0		
<b>3 line voltages and 3 phase voltages</b>		30°	3 48 □ 20A 32A	M10H . M20 .	x x x x x <sup>1)</sup> - . V1 x x x x - - . V1		
			64 □ 32A 50A	N20 . N33F .	x - x - x x . V1 x x x - x - . V1		
<b>2 3-phase systems 2 x 3 line voltages</b>		45°	4 48 □ 20A 32A	M10H . M20 .	x x x x x <sup>1)</sup> - . V32 x x x x - - . V32		
			64 □ 32A 50A	N20 . N33F .	x - x - x x . V32 x - x - x - . V32		
<b>3 line voltages and 1 phase voltage</b>		45°	3 48 □ 20A 32A	M10H . M20 .	x x x x x <sup>1)</sup> - . V13 x x x x - - . V13		
			64 □ 32A 50A	N20 . N33F .	x - x - x x . V13 x x x - x - . V13		

**Ordering example:** AC21 50A panel mounting, Voltmeter selector switch, 3 line voltages and 1 phase voltage  
 1) Plastic enclosed switches are delivered with switch type M10.

N33F E V13

## Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch program	Escutcheon plate
<b>Ammeter selector switches M</b>							
<b>1-pole, for current transformer</b>		90°	1	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . M11 M20 . x x x x - - . M11		
				64 □ 32A 50A	N20 . x - x - x x . M11 N33F . x x x - x - . M11		
				88 □ 63A	N40 . x - x - x - . M11		
<b>2-pole, for 1 current transformer or direct current measurement</b>		90°	2	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . M12 M20 . x x x x - - . M12		
				64 □ 32A 50A	N20 . x - x - x x . M12 N33F . x x x - x - . M12		
				88 □ 63A	N40 . x - x - x - . M12 90A . x - x - x - . M12 115A . x - x - - - . M12		
				132 □ 150A 250A	N100 . x - x - - - . M12 N200 . x - x - - - . M12		
<b>1-pole, for 2 current transformers</b>		90°	2	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . M21 M20 . x x x x - - . M21		
				64 □ 32A 50A	N20 . x - x - x x . M21 N33F . x x x - x - . M21		
				88 □ 63A	N40 . x - x - x - . M21		
<b>2-pole, for 2 current transformers or direct current measurement in 2 phases</b>		90°	3	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . M22 M20 . x x x x - - . M22		
				64 □ 32A 50A	N20 . x - x - x x . M22 N33F . x x x - x - . M22		
				88 □ 63A	N40 . x - x - x - . M22 90A . x - x - x - . M22 115A . N80 . x - x - - - . M22		
				132 □ 150A 250A	N100 . x - x - - - . M22 N200 . x - x - - - . M22		
<b>1-pole, for 3 current transformers</b>		90°	3	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . M31 M20 . x x x x - - . M31		
			4	64 □ 32A 50A	N20 . x - x - x x . M31 N33F . x - x - x - . M31		
				88 □ 63A	N40 . x - x - x - . M31		

**Ordering example:** AC21 63A panel mounting, ammeter selector switch, for 3 current transformers 1-pole

N40 V M31

1) Plastic enclosed switches are delivered with switch type M10.

## Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
<b>Ammeter selector switches M</b>							
<b>2-pole, for 3 current transformers or direct current measurement in 3 phases</b>		90°	6	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . M32 M20 . x x x - - - . M32		
			64 □ 32A 50A	N20 . x - x - x x . M32 N33F . x - x - x - . M32			
			88 □ 63A 90A 115A	N40 . x - x - x - . M32 N61 . x - x - x - . M32 N80 . x - x - - - . M32			
			132 □ 150A 250A	N100 . x - x - - - . M32 N200 . x - x - - - . M32			
<b>1-pole, for 4 current transformers</b>		90°	4	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . M41 M20 . x x x x - - - . M41		
			64 □ 32A 50A	N20 . x - x - x x . M41 N33F . x - x - x - . M41			
			88 □ 63A	N40 . x - x - x - . M41			
<b>2-pole, for 4 current transformers or direct current measurement in 4 phases</b>		90°	6	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . M42 M20 . x x x - - - . M42		
			64 □ 32A 50A	N20 . x - x - x x . M42 N33F . x - x - x - . M42			
			88 □ 63A 90A 115A	N40 . x - x - x - . M42 N61 . x - x - x - . M42 N80 . x - x - - - . M42			
			132 □ 150A 250A	N100 . x - x - - - . M42 N200 . x - x - - - . M42			
<b>f. output measurement in 3-phase systems by 2-wattmeter method</b>		90°	5	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . M2W M20 . x x x x - - - . M2W		
			64 □ 32A 50A	N20 . x - x - x x . M2W N33F . x - x - x - . M2W			
			88 □ 63A	N40 . x - x - x - . M2W N61 . x - x - x - . M2W N80 . x - x - - - . M2W			
			132 □ 150A 250A	N100 . x - x - - - . M2W N200 . x - x - - - . M2W			

**Ordering example:** AC21 63A panel mounting, ammeter selector switch, for 4 current transformers 1-pole

N40 V M41

1) Plastic enclosed switches are delivered with switch type M10.

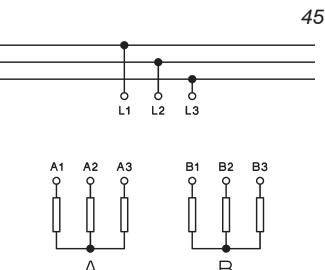

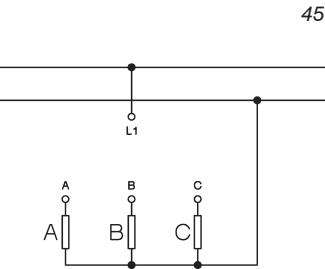

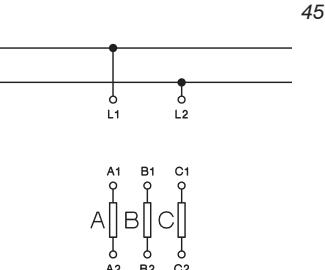

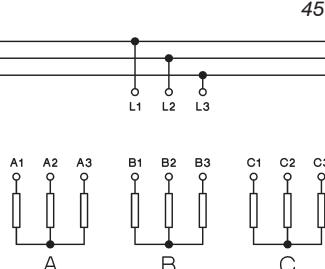

## Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch program	Escutcheon plate	
<b>Gang switches GR</b>								
<b>2 circuits A and B</b> <b>1-pole</b> <b>0 - A - A+B</b>		45°	1	48 □ 20A 32A 64 □ 32A 50A 88 □ 63A 90A 115A 132 □ 150A 250A	M10H . M20 . N20 . N33F . N40 . N61 . N80 . N100 . N200 .	x x x x x <sup>1)</sup> - . x x x x - - . x - x - x x . x x x - x - . x - x - x - . x x x - - - . x - x - - - . x x x - - - .	. GR11 . GR11 . GR11 . GR11 . GR11 . GR11 . GR11 . GR11 . GR11	
<b>2 circuits A and B</b> <b>1-pole</b> <b>0 - A - B - A+B</b>		45°	1	48 □ 20A 32A 64 □ 32A 50A 88 □ 63A 90A 115A 132 □ 150A 250A	M10H . M20 . N20 . N33F . N40 . N61 . N80 . N100 . N200 .	x x x x x <sup>1)</sup> - . x x x x - - . x - x - x x . x x x - x - . x - x - x - . x x x - - - . x - x - - - . x x x - - - .	. GR12 . GR12 . GR12 . GR12 . GR12 . GR12 . GR12 . GR12 . GR12	
<b>2 circuits A and B</b> <b>2-pole</b> <b>0 - A - A+B</b>		45°	2	48 □ 20A 32A 64 □ 32A 50A 88 □ 63A 90A 115A 132 □ 150A 250A	M10H . M20 . N20 . N33F . N40 . N61 . N80 . N100 . N200 .	x x x x x <sup>1)</sup> - . x x x x - - . x - x - x x . x x x - x - . x - x - x - . x x x - - - . x - x - - - . x x x - - - .	. GR21 . GR21 . GR21 . GR21 . GR21 . GR21 . GR21 . GR21 . GR21	
<b>2 circuits A and B</b> <b>2-pole</b> <b>0 - A - B - A+B</b>		45°	2	48 □ 20A 32A 64 □ 32A 50A 88 □ 63A 90A 115A 132 □ 150A 250A	M10H . M20 . N20 . N33F . N40 . N61 . N80 . N100 . N200 .	x x x x x <sup>1)</sup> - . x x x x - - . x - x - x x . x x x - x - . x - x - x - . x x x - - - . x - x - - - . x x x - - - .	. GR22 . GR22 . GR22 . GR22 . GR22 . GR22 . GR22 . GR22 . GR22	
<b>2 circuits A and B</b> <b>3-pole</b> <b>0 - A - A+B</b>		45°	3	48 □ 20A 32A 64 □ 32A 50A 88 □ 63A 90A 115A 132 □ 150A 250A	M10H . M20 . N20 . N33F . N40 . N61 . N80 . N100 . N200 .	x x x x x <sup>1)</sup> - . x x x x - - . x - x - x x . x x x - x - . x - x - x - . x x x - - - . x - x - - - . x x x - - - .	. GR31 . GR31 . GR31 . GR31 . GR31 . GR31 . GR31 . GR31 . GR31	

**Ordering example:** AC21 250A panel mounting, gang switch, 2 circuits A and B, 3-pole **N200 E GR31**

1) Plastic enclosed switches are delivered with switch type M10.

## Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
<b>Gang switches GR</b>							
<b>2 circuits A and B</b> 3-pole 0 - A - B - A+B		45°	3	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . GR32 M20 . x x x x - - . GR32		 +127
			64 □ 32A 50A	N20 . x - x - x x . GR32 N33F . x - x - x - . GR32			
			88 □ 63A 90A 115A	N40 . x - x - x - . GR32 N61 . x - x - x - . GR32 N80 . x - x - - - . GR32			
			132 □ 150A 250A	N100 . x - x - - - . GR32 N200 . x - x - - - . GR32			
<b>3 circuits A, B and C</b> 1-pole 0 - A - A+B - A+B+C		45°	2	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . GR14 M20 . x x x x - - . GR14		 +127
			64 □ 32A 50A	N20 . x - x - x x . GR14 N33F . x - x - x - . GR14			
			88 □ 63A 90A 115A	N40 . x - x - x - . GR14 N61 . x - x - x - . GR14 N80 . x - x - - - . GR14			
			132 □ 150A 250A	N100 . x - x - - - . GR14 N200 . x - x - - - . GR14			
<b>3 circuits A, B and C</b> 2-pole 0 - A - A+B - A+B+C		45°	3	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . GR23 M20 . x x x x - - . GR23		 +127
			64 □ 32A 50A	N20 . x - x - x x . GR23 N33F . x - x - x - . GR23			
			88 □ 63A 90A 115A	N40 . x - x - x - . GR23 N61 . x - x - x - . GR23 N80 . x - x - - - . GR23			
			132 □ 150A 250A	N100 . x - x - - - . GR23 N200 . x - x - - - . GR23			
<b>3 circuits A, B and C</b> 3-pole 0 - A - A+B - A+B+C		45°	5	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . GR33 M20 . x x x x - - . GR33		 +127
			64 □ 32A 50A	N20 . x - x - x x . GR33 N33F . x - x - x - . GR33			
			88 □ 63A 90A 115A	N40 . x - x - x - . GR33 N61 . x - x - x - . GR33 N80 . x - x - - - . GR33			
			132 □ 150A 250A	N100 . x - x - - - . GR33 N200 . x - x - - - . GR33			

**Ordering example:** AC21 250A panel mounting, gang switch, 3 circuits A, B and C, 3-pole

N200 E GR33

1) Plastic enclosed switches are delivered with switch type M10.

## Switching programs











Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch program	Escutcheon plate
<b>Series-Parallel switches SP</b>							
<b>2 circuits A and B 2-pole</b> 0 - A + B - A,B (parallel)		45°	2 48 □ 20A 32A	M10H . M20 .	x x x x x <sup>1)</sup> - . x x x x - - .	SP1 SP1	
			64 □ 32A 50A	N20 . N33F .	x - x - x x . x x x - x - .	SP1 SP1	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - x - . x - x - x - . x - x - - - .	SP1 SP1 SP1	
			132 □ 150A 250A	N100 . N200 .	x - x - - - . x - x - - - .	SP1 SP1	
<b>2 circuits A and B 2-pole</b> 0 - A,B (parallel.) - A - A+B		90°	3 48 □ 20A 32A	M10H . M20 .	x x x x x <sup>1)</sup> - . x x x x - - .	SP4 SP4	
			64 □ 32A 50A	N20 . N33F .	x - x - x x . x x x - x - .	SP4 SP4	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - x - . x - x - x - . x - x - - - .	SP4 SP4 SP4	
			132 □ 150A 250A	N100 . N200 .	x - x - - - . x - x - - - .	SP4 SP4	
<b>2 circuits A and B for 3-phase systems</b> 0 - A+B - A - B - A,B		30°	2 48 □ 20A 32A	M10H . M20 .	x x x x x <sup>1)</sup> - . x x x x - - .	SP3 SP3	
			64 □ 32A 50A	N20 . N33F .	x - x - x x . x x x - x - .	SP3 SP3	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - x - . x - x - x - . x - x - - - .	SP3 SP3 SP3	
			132 □ 150A 250A	N100 . N200 .	x - x - - - . x - x - - - .	SP3 SP3	

**Ordering example:** AC21 250A panel mounting, series-parallel switch, 2 circuits for 3-phase systems

N200 E SP3

1) Plastic enclosed switches are delivered with switch type M10.

## Switching programs











Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
<b>Multi step switches 1-pole without Off ST.1</b>							
<b>3 steps</b>		60°	2	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . M20 . x x x x - - .	.ST31 .ST31	
				64 □ 32A 50A	N20 . x - x - x x . N33F . x x x - x - .	.ST31 .ST31	
				88 □ 63A 90A 115A	N40 . x - x - x - . N61 . x - x - x - . N80 . x - x - - - .	.ST31 .ST31 .ST31	
				132□ 150A 250A	N100 . x - x - - - . N200 . x - x - - - .	.ST31 .ST31	
<b>4 steps</b>		60°	2	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . M20 . x x x x - - .	.ST41 .ST41	
				64 □ 32A 50A	N20 . x - x - x x . N33F . x x x - x - .	.ST41 .ST41	
				88 □ 63A 90A 115A	N40 . x - x - x - . N61 . x - x - x - . N80 . x - x - - - .	.ST41 .ST41 .ST41	
				132□ 150A 250A	N100 . x - x - - - . N200 . x - x - - - .	.ST41 .ST41	
<b>5 steps</b>		60°	3	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . M20 . x x x x - - .	.ST51 .ST51	
				64 □ 32A 50A	N20 . x - x - x x . N33F . x x x - x - .	.ST51 .ST51	
				88 □ 63A 90A 115A	N40 . x - x - x - . N61 . x - x - x - . N80 . x - x - - - .	.ST51 .ST51 .ST51	
				132□ 150A 250A	N100 . x - x - - - . N200 . x - x - - - .	.ST51 .ST51	
<b>6 steps</b>		60°	3	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . M20 . x x x x - - .	.ST61 .ST61	
				64 □ 32A 50A	N20 . x - x - x x . N33F . x x x - x - .	.ST61 .ST61	
				88 □ 63A 90A 115A	N40 . x - x - x - . N61 . x - x - x - . N80 . x - x - - - .	.ST61 .ST61 .ST61	
				132□ 150A 250A	N100 . x - x - - - . N200 . x - x - - - .	.ST61 .ST61	
<b>7 steps</b>		45°	4	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . M20 . x x x x - - .	.ST71 .ST71	
				64 □ 32A 50A	N20 . x - x - x x . N33F . x - x - x - .	.ST71 .ST71	
				88 □ 63A 90A 115A	N40 . x - x - x - . N61 . x - x - x - . N80 . x - x - - - .	.ST71 .ST71 .ST71	
				132□ 150A 250A	N100 . x - x - - - . N200 . x - x - - - .	.ST71 .ST71	

**Ordering example:** AC21 250A panel mounting, multi step switch 1-pole without off, 7 steps

N200 E ST71

1) Plastic enclosed switches are delivered with switch type M10.

## Switching programs






















Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch program	Escutcheon plate
<b>Multi step switches 1-pole without Off ST.1</b>							
<b>8 steps</b>		45°	4 48 □ 20A 32A	M10H . M20 .	x x x x x x <sup>1)</sup> - . x x x x - - .	ST81 ST81	
			64 □ 32A 50A	N20 . N33F .	x - x - x x . x - x - x - .	ST81 ST81	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - x - x - . x - x - x - . x - x - - - .	ST81 ST81 ST81	
			132 □ 150A 250A	N100 . N200 .	x - x - - - . x - x - - - .	ST81 ST81	
<b>9 steps</b>		30°	5 48 □ 20A 32A	M10H . M20 .	x x x x x x <sup>1)</sup> - . x x x x - - .	ST91 ST91	
			64 □ 32A 50A	N20 . N33F .	x - x - x x . x - x - x - .	ST91 ST91	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - x - x - . x - x - x - . x - x - - - .	ST91 ST91 ST91	
			132 □ 150A 250A	N100 . N200 .	x - x - - - . x - x - - - .	ST91 ST91	
<b>10 steps</b>		30°	5 48 □ 20A 32A	M10H . M20 .	x x x x x x <sup>1)</sup> - . x x x x - - .	ST101 ST101	
			64 □ 32A 50A	N20 . N33F .	x - x - x x . x - x - x - .	ST101 ST101	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - x - x - . x - x - x - . x - x - - - .	ST101 ST101 ST101	
			132 □ 150A 250A	N100 . N200 .	x - x - - - . x - x - - - .	ST101 ST101	
<b>11 steps</b>		30°	6 48 □ 20A 32A	M10H . M20 .	x x x - x <sup>1)</sup> - . x x x - - - .	ST111 ST111	
			64 □ 32A 50A	N20 . N33F .	x - x - x x . x - x - x - .	ST111 ST111	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - x - x - . x - x - x - . x - x - - - .	ST111 ST111 ST111	
			132 □ 150A 250A	N100 . N200 .	x - x - - - . x - x - - - .	ST111 ST111	
<b>12 steps</b>		30°	6 48 □ 20A 32A	M10H . M20 .	x x x - x <sup>1)</sup> - . x x x - - - .	ST121 ST121	
			64 □ 32A 50A	N20 . N33F .	x - x - x x . x - x - x - .	ST121 ST121	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - x - x - . x - x - x - . x - x - - - .	ST121 ST121 ST121	
			132 □ 150A 250A	N100 . N200 .	x - x - - - . x - x - - - .	ST121 ST121	

**Ordering example:** AC21 250A panel mounting, multi step switch 1-pole without off, 12 steps

**N200 E ST121**

1) Plastic enclosed switches are delivered with switch type M10.

## Switching programs






Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
<b>Multi step switches 1-pole with Off ST0.1</b>							
<b>2 steps</b>		60°	1 48 □ 20A 32A	M10H . M20 .	x x x x x <sup>1)</sup> - . x x x x - - .	ST021 ST021	
			64 □ 32A 50A	N20 . N33F .	x - x - x x . x x x - x - .	ST021 ST021	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - x - . x - x - x - . x - x - - - .	ST021 ST021 ST021	
			132□ 150A 250A	N100 . N200 .	x - x - - - . x - x - - - .	ST021 ST021	
<b>3 steps</b>		45°	2 48 □ 20A 32A	M10H . M20 .	x x x x x <sup>1)</sup> - . x x x x - - .	ST031 ST031	
			64 □ 32A 50A	N20 . N33F .	x - x - x x . x x x - x - .	ST031 ST031	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - x - . x - x - x - . x - x - - - .	ST031 ST031 ST031	
			132□ 150A 250A	N100 . N200 .	x - x - - - . x - x - - - .	ST031 ST031	
<b>4 steps</b>		30°	2 48 □ 20A 32A	M10H . M20 .	x x x x x <sup>1)</sup> - . x x x x - - .	ST041 ST041	
			64 □ 32A 50A	N20 . N33F .	x - x - x x . x x x - x - .	ST041 ST041	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - x - . x - x - x - . x - x - - - .	ST041 ST041 ST041	
			132□ 150A 250A	N100 . N200 .	x - x - - - . x - x - - - .	ST041 ST041	
<b>5 steps</b>		45°	3 48 □ 20A 32A	M10H . M20 .	x x x x x <sup>1)</sup> - . x x x x - - .	ST051 ST051	
			64 □ 32A 50A	N20 . N33F .	x - x - x x . x x x - x - .	ST051 ST051	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - x - . x - x - x - . x - x - - - .	ST051 ST051 ST051	
			132□ 150A 250A	N100 . N200 .	x - x - - - . x - x - - - .	ST051 ST051	
<b>6 steps</b>		45°	4 48 □ 20A 32A	M10H . M20 .	x x x x x <sup>1)</sup> - . x x x x - - .	ST061 ST061	
			64 □ 32A 50A	N20 . N33F .	x - x - x x . x - x - x - .	ST061 ST061	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - x - . x - x - x - . x - x - - - .	ST061 ST061 ST061	
			132□ 150A 250A	N100 . N200 .	x - x - - - . x - x - - - .	ST061 ST061	

**Ordering example:** AC21 250A panel mounting, multi step switch 1-pole with off, 6 steps

N200 E ST061

1) Plastic enclosed switches are delivered with switch type M10.











## Switching programs

Description	Wiring diagram	Switching angle ↓ Size ↓ AC21	Number of cells	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch program	Escutcheon plate
<b>Multi step switches 1-pole with Off ST0.1</b>							
<b>7 steps</b>		45°	4 48 □ 20A 32A	M10H . M20 .	x x x x x x x x x -	x <sup>1)</sup> - . - - .	ST071 ST071
			64 □ 32A 50A	N20 . N33F .	x - x - x - x -	x x . x - .	ST071 ST071
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - x - x - x - x -	x - . x - . - - .	ST071 ST071 ST071
			132□ 150A 250A	N100 . N200 .	x - x - x - x -	- - . - - .	ST071 ST071
<b>8 steps</b>		30°	5 48 □ 20A 32A	M10H . M20 .	x x x x x x x x x -	x <sup>1)</sup> - . - - .	ST081 ST081
			64 □ 32A 50A	N20 . N33F .	x - x - x - x -	x x . x - .	ST081 ST081
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - x - x - x - x -	x - . x - . - - .	ST081 ST081 ST081
			132□ 150A 250A	N100 . N200 .	x - x - x - x -	- - . - - .	ST081 ST081
<b>9 steps</b>		30°	5 48 □ 20A 32A	M10H . M20 .	x x x x x x x x x -	x <sup>1)</sup> - . - - .	ST091 ST091
			64 □ 32A 50A	N20 . N33F .	x - x - x - x -	x x . x - .	ST091 ST091
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - x - x - x - x -	x - . x - . - - .	ST091 ST091 ST091
			132□ 150A 250A	N100 . N200 .	x - x - x - x -	- - . - - .	ST091 ST091
<b>10 steps</b>		30°	6 48 □ 20A 32A	M10H . M20 .	x x x - x x x -	x <sup>1)</sup> - . - - .	ST0101 ST0101
			64 □ 32A 50A	N20 . N33F .	x - x - x - x -	x x . x - .	ST0101 ST0101
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - x - x - x - x -	x - . x - . - - .	ST0101 ST0101 ST0101
			132□ 150A 250A	N100 . N200 .	x - x - x - x -	- - . - - .	ST0101 ST0101
<b>11 steps</b>		30°	6 48 □ 20A 32A	M10H . M20 .	x x x - x x x -	x <sup>1)</sup> - . - - .	ST0111 ST0111
			64 □ 32A 50A	N20 . N33F .	x - x - x - x -	x x . x - .	ST0111 ST0111
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - x - x - x - x -	x - . x - . - - .	ST0111 ST0111 ST0111
			132□ 150A 250A	N100 . N200 .	x - x - x - x -	- - . - - .	ST0111 ST0111

**Ordering example:** AC21 250A panel mounting, multi step switch 1-pole with off, 11 steps N200 E ST0111

1) Plastic enclosed switches are delivered with switch type M10.

## Switching programs


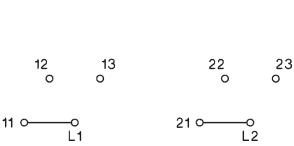

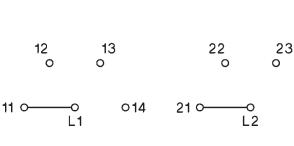

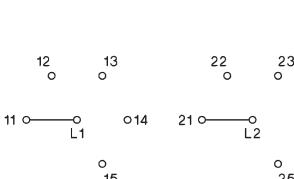

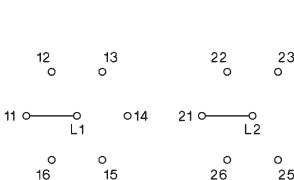

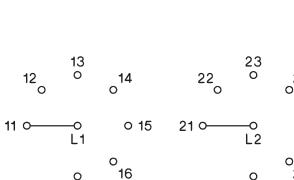
Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
<b>Multi step switches 2-pole without Off ST.2</b>							
<b>3 steps</b>		60°	3	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . M20 . x x x x - - .	ST32 ST32	
				64 □ 32A 50A	N20 . x - x - x x . N33F . x x x - x - .	ST32 ST32	
				88 □ 63A 90A 115A	N40 . x - x - x - . N61 . x - x - x - . N80 . x - x - - - .	ST32 ST32 ST32	
				132□ 150A 250A	N100 . x - x - - - . N200 . x - x - - - .	ST32 ST32	
<b>4 steps</b>		60°	4	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . M20 . x x x x - - .	ST42 ST42	
				64 □ 32A 50A	N20 . x - x - x x . N33F . x - x - x - .	ST42 ST42	
				88 □ 63A 90A 115A	N40 . x - x - x - . N61 . x - x - x - . N80 . x - x - - - .	ST42 ST42 ST42	
				132□ 150A 250A	N100 . x - x - - - . N200 . x - x - - - .	ST42 ST42	
<b>5 steps</b>		60°	5	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . M20 . x x x x - - .	ST52 ST52	
				64 □ 32A 50A	N20 . x - x - x x . N33F . x - x - x - .	ST52 ST52	
				88 □ 63A 90A 115A	N40 . x - x - x - . N61 . x - x - x - . N80 . x - x - - - .	ST52 ST52 ST52	
				132□ 150A 250A	N100 . x - x - - - . N200 . x - x - - - .	ST52 ST52	
<b>6 steps</b>		60°	6	48 □ 20A 32A	M10H . x x x - x <sup>1)</sup> - . M20 . x x x - - - .	ST62 ST62	
				64 □ 32A 50A	N20 . x - x - x x . N33F . x - x - x - .	ST62 ST62	
				88 □ 63A 90A 115A	N40 . x - x - x - . N61 . x - x - x - . N80 . x - x - - - .	ST62 ST62 ST62	
				132□ 150A 250A	N100 . x - x - - - . N200 . x - x - - - .	ST62 ST62	
<b>7 steps</b>		45°	7	48 □ 20A 32A	M10H . x x x - - - . M20 . x x x - - - .	ST72 ST72	
				64 □ 32A 50A	N20 . x - x - x - . N33F . x - x - - - .	ST72 ST72	
				88 □ 63A 90A 115A	N40 . x - x - x - . N61 . x - x - - - . N80 . x - x - - - .	ST72 ST72 ST72	
				132□ 150A 250A	N100 . x - x - - - . N200 . x - x - - - .	ST72 ST72	

**Ordering example:** AC21 250A panel mounting, multi step switch 2-pole without off, 7 steps

N200 E ST72

1) Plastic enclosed switches are delivered with switch type M10.

















## Switching programs

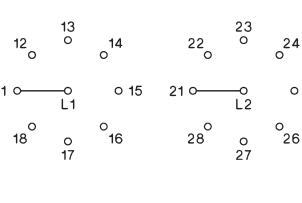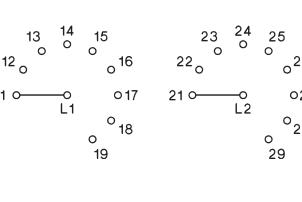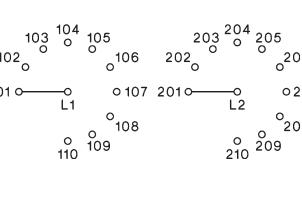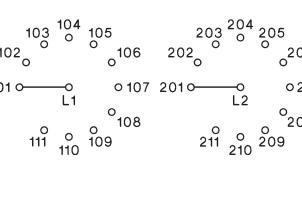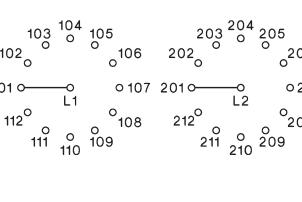Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch program	Escutcheon plate
<b>Multi step switches 2-pole without Off ST.2</b>							
<b>8 steps</b>		45°	8 48 □ 20A 32A	M10H . M20 .	x x x - - - - . x x x - - - - .	ST82 ST82	
			64 □ 32A 50A	N20 . N33F .	x - x - - x - . x - x - - - - .	ST82 ST82	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - - x - . x - x - - - - . x - x - - - - .	ST82 ST82 ST82	
			132□ 150A 250A	N100 . N200 .	x - x - - - - . x - x - - - - .	ST82 ST82	
<b>9 steps</b>		30°	9 48 □ 20A 32A	M10H . M20 .	x x x - - - - . x x x - - - - .	ST92 ST92	
			64 □ 32A 50A	N20 . N33F .	x - x - - - - . x - x - - - - .	ST92 ST92	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - - - - . x - x - - - - . x - x - - - - .	ST92 ST92 ST92	
			132□ 150A 250A	N100 . N200 .	x - x - - - - . x - x - - - - .	ST92 ST92	
<b>10 steps</b>		30°	10 48 □ 20A 32A	M10H . M20 .	x x x - - - - . x x x - - - - .	ST102 ST102	
			64 □ 32A 50A	N20 . N33F .	x - x - - - - . x - x - - - - .	ST102 ST102	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - - - - . x - x - - - - . x - x - - - - .	ST102 ST102 ST102	
			132□ 150A 250A	N100 . N200 .	x - x - - - - . x - x - - - - .	ST102 ST102	
<b>11 steps</b>		30°	11 48 □ 20A 32A	M10H . M20 .	x x x - - - - . x x x - - - - .	ST112 ST112	
			64 □ 32A 50A	N20 . N33F .	x - x - - - - . x - x - - - - .	ST112 ST112	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - - - - . x - x - - - - . x - x - - - - .	ST112 ST112 ST112	
			132□ 150A 250A	N100 . N200 .	x - x - - - - . x - x - - - - .	ST112 ST112	
<b>12 steps</b>		30°	12 48 □ 20A 32A	M10H . M20 .	x x x - - - - . x x x - - - - .	ST122 ST122	
			64 □ 32A 50A	N20 . N33F .	x - x - - - - . x - x - - - - .	ST122 ST122	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - - - - . x - x - - - - . x - x - - - - .	ST122 ST122 ST122	
			132□ 150A 250A	N100 . N200 .	x - x - - - - . x - x - - - - .	ST122 ST122	

**Ordering example:** AC21 250A panel mounting, multi step switch 2-pole without off, 12 steps

**N200 E ST122**
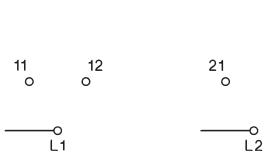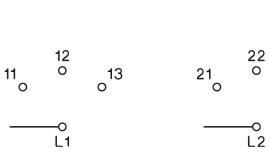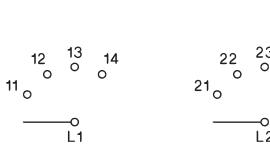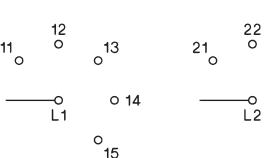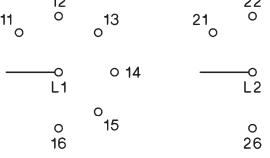
## Switching programs





















Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
<b>Multi step switches 2-pole with Off ST0.2</b>							
<b>2 steps</b>		60°	2 48 □ 20A 32A	M10H . M20 .	x x x x x <sup>1)</sup> - . x x x x - - .	ST022 ST022	
			64 □ 32A 50A	N20 . N33F .	x - x - x x . x x x - x - .	ST022 ST022	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - x - . x - x - x - . x - x - - - .	ST022 ST022 ST022	
			132□ 150A 250A	N100 . N200 .	x - x - - - . x - x - - - .	ST022 ST022	
<b>3 steps</b>		45°	3 48 □ 20A 32A	M10H . M20 .	x x x x x <sup>1)</sup> - . x x x x - - .	ST032 ST032	
			64 □ 32A 50A	N20 . N33F .	x - x - x x . x x x - x - .	ST032 ST032	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - x - . x - x - x - . x - x - - - .	ST032 ST032 ST032	
			132□ 150A 250A	N100 . N200 .	x - x - - - . x - x - - - .	ST032 ST032	
<b>4 steps</b>		30°	4 48 □ 20A 32A	M10H . M20 .	x x x x x <sup>1)</sup> - . x x x x - - .	ST042 ST042	
			64 □ 32A 50A	N20 . N33F .	x - x - x x . x - x - x - .	ST042 ST042	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - x - . x - x - x - . x - x - - - .	ST042 ST042 ST042	
			132□ 150A 250A	N100 . N200 .	x - x - - - . x - x - - - .	ST042 ST042	
<b>5 steps</b>		45°	6 48 □ 20A 32A	M10H . M20 .	x x x - x <sup>1)</sup> - . x x x - - - .	ST052 ST052	
			64 □ 32A 50A	N20 . N33F .	x - x - x x . x - x - x - .	ST052 ST052	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - x - . x - x - x - . x - x - - - .	ST052 ST052 ST052	
			132□ 150A 250A	N100 . N200 .	x - x - - - . x - x - - - .	ST052 ST052	
<b>6 steps</b>		45°	7 48 □ 20A 32A	M10H . M20 .	x x x - x <sup>1)</sup> - . x x x - - - .	ST062 ST062	
			64 □ 32A 50A	N20 . N33F .	x - x - x - . x - x - - - .	ST062 ST062	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - x - . x - x - - - . x - x - - - .	ST062 ST062 ST062	
			132□ 150A 250A	N100 . N200 .	x - x - - - . x - x - - - .	ST062 ST062	

**Ordering example:** AC21 250A panel mounting, multi step switch 2-pole with off, 6 steps

N200 E ST062

1) Plastic enclosed switches are delivered with switch type M10.

## Switching programs

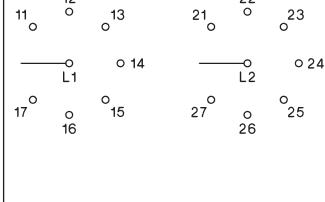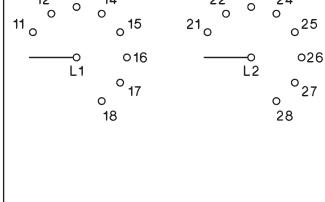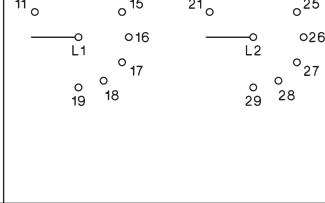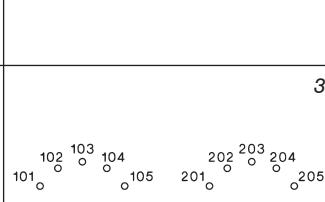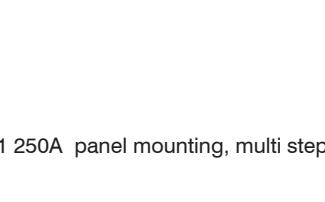Description	Wiring diagram	Switching angle ↓ Size ↓ AC21	Number of cells	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch program	Escutcheon plate
<b>Multi step switches 2-pole with Off ST0.2</b>							
<b>7 steps</b>		45°	8	48 □ 20A 32A	M10H . x x x - - - . ST072 M20 . x x x - - - . ST072		
				64 □ 32A 50A	N20 . x - x - x - . ST072 N33F . x - x - - - . ST072		
				88 □ 63A 90A 115A	N40 . x - x - x - . ST072 N61 . x - x - - - . ST072 N80 . x - x - - - . ST072		
				132□ 150A 250A	N100 . x - x - - - . ST072 N200 . x - x - - - . ST072		
<b>8 steps</b>		30°	9	48 □ 20A 32A	M10H . x x x - - - . ST082 M20 . x x x - - - . ST082		
				64 □ 32A 50A	N20 . x - x - - - . ST082 N33F . x - x - - - . ST082		
				88 □ 63A 90A 115A	N40 . x - x - - - . ST082 N61 . x - x - - - . ST082 N80 . x - x - - - . ST082		
				132□ 150A 250A	N100 . x - x - - - . ST082 N200 . x - x - - - . ST082		
<b>9 steps</b>		30°	10	48 □ 20A 32A	M10H . x x x - - - . ST092 M20 . x x x - - - . ST092		
				64 □ 32A 50A	N20 . x - x - - - . ST092 N33F . x - x - - - . ST092		
				88 □ 63A 90A 115A	N40 . x - x - - - . ST092 N61 . x - x - - - . ST092 N80 . x - x - - - . ST092		
				132□ 150A 250A	N100 . x - x - - - . ST092 N200 . x - x - - - . ST092		
<b>10 steps</b>		30°	11	48 □ 20A 32A	M10H . x x x - - - . ST0102 M20 . x x x - - - . ST0102		
				64 □ 32A 50A	N20 . x - x - - - . ST0102 N33F . x - x - - - . ST0102		
				88 □ 63A 90A 115A	N40 . x - x - - - . ST0102 N61 . x - x - - - . ST0102 N80 . x - x - - - . ST0102		
				132□ 150A 250A	N100 . x - x - - - . ST0102 N200 . x - x - - - . ST0102		
<b>11 steps</b>		30°	12	48 □ 20A 32A	M10H . x x x - - - . ST0112 M20 . x x x - - - . ST0112		
				64 □ 32A 50A	N20 . x - x - - - . ST0112 N33F . x - x - - - . ST0112		
				88 □ 63A 90A 115A	N40 . x - x - - - . ST0112 N61 . x - x - - - . ST0112 N80 . x - x - - - . ST0112		
				132□ 150A 250A	N100 . x - x - - - . ST0112 N200 . x - x - - - . ST0112		

**Ordering example:** AC21 250A panel mounting, multi step switch 2-pole with off, 11 steps N200 E ST0112

## Switching programs


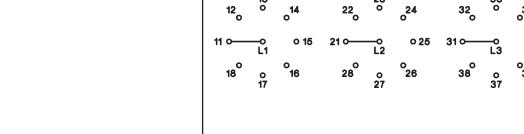

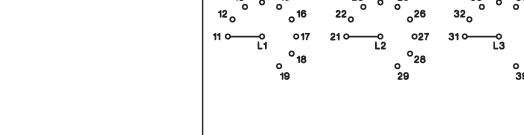

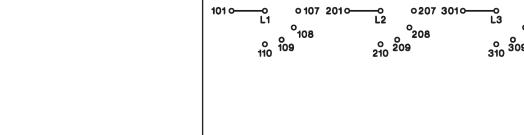

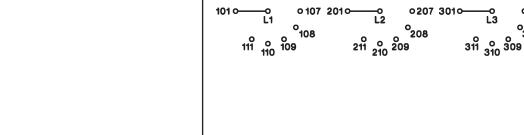

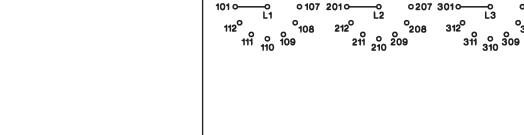
Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
<b>Multi step switches 3-pole without Off ST.3</b>							
3 steps		60°	5	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . ST33 M20 . x x x x - - . ST33		
			64 □ 32A 50A	N20 . x - x - x x . ST33 N33F . x - x - x - . ST33			
			88 □ 63A 90A 115A	N40 . x - x - x - . ST33 N61 . x - x - x - . ST33 N80 . x - x - - - . ST33			
			132 □ 150A 250A	N100 . x - x - - - . ST33 N200 . x - x - - - . ST33			
4 steps		60°	6	48 □ 20A 32A	M10H . x x x - x <sup>1)</sup> - . ST43 M20 . x x x - - - . ST43		
			64 □ 32A 50A	N20 . x - x - x x . ST43 N33F . x - x - x - . ST43			
			88 □ 63A 90A 115A	N40 . x - x - x - . ST43 N61 . x - x - x - . ST43 N80 . x - x - - - . ST43			
			132 □ 150A 250A	N100 . x - x - - - . ST43 N200 . x - x - - - . ST43			
5 steps		60°	8	48 □ 20A 32A	M10H . x x x - - - . ST53 M20 . x x x - - - . ST53		
			64 □ 32A 50A	N20 . x - x - x - . ST53 N33F . x - x - - - . ST53			
			88 □ 63A 90A 115A	N40 . x - x - x - . ST53 N61 . x - x - - - . ST53 N80 . x - x - - - . ST53			
			132 □ 150A 250A	N100 . x - x - - - . ST53 N200 . x - x - - - . ST53			
6 steps		60°	9	48 □ 20A 32A	M10H . x x x - - - . ST63 M20 . x x x - - - . ST63		
			64 □ 32A 50A	N20 . x - x - - - . ST63 N33F . x - x - - - . ST63			
			88 □ 63A 90A 115A	N40 . x - x - - - . ST63 N61 . x - x - - - . ST63 N80 . x - x - - - . ST63			
			132 □ 150A 250A	N100 . x - x - - - . ST63 N200 . x - x - - - . ST63			
7 steps		45°	11	48 □ 20A 32A	M10H . x x x - - - . ST73 M20 . x x x - - - . ST73		
			64 □ 32A 50A	N20 . x - x - - - . ST73 N33F . x - x - - - . ST73			
			88 □ 63A 90A 115A	N40 . x - x - - - . ST73 N61 . x - x - - - . ST73 N80 . x - x - - - . ST73			
			132 □ 150A 250A	N100 . x - x - - - . ST73 N200 . x - x - - - . ST73			

**Ordering example:** AC21 250A panel mounting, multi step switch 3-pole without off, 7 steps

N200 E ST73

1) Plastic enclosed switches are delivered with switch type M10.























## Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch program	Escutcheon plate
<b>Multi step switches 3-pole without Off ST.3</b>							
<b>8 steps</b>		45°	12 48 □ 20A 32A	M10H . M20 .	x x x - - - . x x x - - - .	ST83 ST83	
			64 □ 32A 50A	N20 . N33F .	x - x - - - . x - x - - - .	ST83 ST83	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - - - . x - x - - - . x - x - - - .	ST83 ST83 ST83	
			132 □ 150A 250A	N100 . N200 .	x - x - - - . x - x - - - .	ST83 ST83	
<b>9 steps</b>		30°	14 48 □ 20A 32A	M10H . M20 .	x - x - - - . x - x - - - .	ST93 ST93	
			64 □ 32A 50A	N20 . N33F .	x - x - - - . x - x - - - .	ST93 ST93	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - - - . x - x - - - . x - x - - - .	ST93 ST93 ST93	
			132 □ 150A 250A	N100 . N200 .	x - x - - - . x - x - - - .	ST93 ST93	
<b>10 steps</b>		30°	15 48 □ 20A 32A	M10H . M20 .	x - x - - - . x - x - - - .	ST103 ST103	
			64 □ 32A 50A	N20 . N33F .	x - x - - - . x - x - - - .	ST103 ST103	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - - - . x - x - - - . x - x - - - .	ST103 ST103 ST103	
			132 □ 150A 250A	N100 . N200 .	x - x - - - . x - x - - - .	ST103 ST103	
<b>11 steps</b>		30°	17 48 □ 20A 32A	M10H . M20 .	x - x - - - . x - x - - - .	ST113 ST113	
			64 □ 32A 50A	N20 . N33F .	x - x - - - . x - x - - - .	ST113 ST113	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - - - . x - x - - - . x - x - - - .	ST113 ST113 ST113	
			132 □ 150A 250A	N100 . N200 .	x - x - - - . x - x - - - .	ST113 ST113	
<b>12 steps</b>		30°	18 48 □ 20A 32A	M10H . M20 .	x - x - - - . x - x - - - .	ST123 ST123	
			64 □ 32A 50A	N20 . N33F .	x - x - - - . x - x - - - .	ST123 ST123	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - - - . x - x - - - . x - x - - - .	ST123 ST123 ST123	
			132 □ 150A 250A	N100 . N200 .	x - x - - - . x - x - - - .	ST123 ST123	

**Ordering example:** AC21 250A panel mounting, multi step switch 3-pole without off, 12 steps

N200 E ST123


























## Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
<b>Multi step switches 3-pole with Off ST0.3</b>							
<b>2 steps</b>		60°	3	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . ST023 M20 . x x x x - - . ST023		
				64 □ 32A 50A	N20 . x - x - x x . ST023 N33F . x x x - x - . ST023		
				88 □ 63A 90A 115A	N40 . x - x - x - . ST023 N61 . x - x - x - . ST023 N80 . x - x - - - . ST023		
				132 □ 150A 250A	N100 . x - x - - - . ST023 N200 . x - x - - - . ST023		
<b>3 steps</b>		45°	5	48 □ 20A 32A	M10H . x x x x x <sup>1)</sup> - . ST033 M20 . x x x x - - . ST033		
				64 □ 32A 50A	N20 . x - x - x x . ST033 N33F . x - x - x - . ST033		
				88 □ 63A 90A 115A	N40 . x - x - x - . ST033 N61 . x - x - x - . ST033 N80 . x - x - - - . ST033		
				132 □ 150A 250A	N100 . x - x - - - . ST033 N200 . x - x - - - . ST033		
<b>4 steps</b>		30°	6	48 □ 20A 32A	M10H . x x x - x <sup>1)</sup> - . ST043 M20 . x x x - - - . ST043		
				64 □ 32A 50A	N20 . x - x - x x . ST043 N33F . x - x - x - . ST043		
				88 □ 63A 90A 115A	N40 . x - x - x - . ST043 N61 . x - x - x - . ST043 N80 . x - x - - - . ST043		
				132 □ 150A 250A	N100 . x - x - - - . ST043 N200 . x - x - - - . ST043		
<b>5 steps</b>		45°	9	48 □ 20A 32A	M10H . x x x - - - . ST053 M20 . x x x - - - . ST053		
				64 □ 32A 50A	N20 . x - x - - - . ST053 N33F . x - x - - - . ST053		
				88 □ 63A 90A 115A	N40 . x - x - - - . ST053 N61 . x - x - - - . ST053 N80 . x - x - - - . ST053		
				132 □ 150A 250A	N100 . x - x - - - . ST053 N200 . x - x - - - . ST053		
<b>6 steps</b>		45°	11	48 □ 20A 32A	M10H . x x x - - - . ST063 M20 . x x x - - - . ST063		
				64 □ 32A 50A	N20 . x - x - - - . ST063 N33F . x - x - - - . ST063		
				88 □ 63A 90A 115A	N40 . x - x - - - . ST063 N61 . x - x - - - . ST063 N80 . x - x - - - . ST063		
				132 □ 150A 250A	N100 . x - x - - - . ST063 N200 . x - x - - - . ST063		

**Ordering example:** AC21 250A panel mounting, multi step switch 3-pole with off, 6 steps **N200 E ST063**

1) Plastic enclosed switches are delivered with switch type M10.

## Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch program	Escutcheon plate
<b>Multi step switches 3-pole with Off ST0.3</b>							
<b>7 steps</b>		45°	12 48 □ 20A 32A	M10H . M20 .	x x x - - - . x x x - - - .	. ST073 . ST073	
			64 □ 32A 50A	N20 . N33F .	x - x - - - . x - x - - - .	. ST073 . ST073	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - - - . x - x - - - . x - x - - - .	. ST073 . ST073 . ST073	
			132 □ 150A 250A	N100 . N200 .	x - x - - - . x - x - - - .	. ST073 . ST073	
<b>8 steps</b>		30°	14 48 □ 20A 32A	M10H . M20 .	x - x - - - . x - x - - - .	. ST083 . ST083	
			64 □ 32A 50A	N20 . N33F .	x - x - - - . x - x - - - .	. ST083 . ST083	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - - - . x - x - - - . x - x - - - .	. ST083 . ST083 . ST083	
			132 □ 150A 250A	N100 . N200 .	x - x - - - . x - x - - - .	. ST083 . ST083	
<b>9 steps</b>		30°	15 48 □ 20A 32A	M10H . M20 .	x - x - - - . x - x - - - .	. ST093 . ST093	
			64 □ 32A 50A	N20 . N33F .	x - x - - - . x - x - - - .	. ST093 . ST093	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - - - . x - x - - - . x - x - - - .	. ST093 . ST093 . ST093	
			132 □ 150A 250A	N100 . N200 .	x - x - - - . x - x - - - .	. ST093 . ST093	
<b>10 steps</b>		30°	17 48 □ 20A 32A	M10H . M20 .	x - x - - - . x - x - - - .	. ST0103 . ST0103	
			64 □ 32A 50A	N20 . N33F .	x - x - - - . x - x - - - .	. ST0103 . ST0103	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - - - . x - x - - - . x - x - - - .	. ST0103 . ST0103 . ST0103	
			132 □ 150A 250A	N100 . N200 .	x - x - - - . x - x - - - .	. ST0103 . ST0103	
<b>11 steps</b>		30°	18 48 □ 20A 32A	M10H . M20 .	x - x - - - . x - x - - - .	. ST0113 . ST0113	
			64 □ 32A 50A	N20 . N33F .	x - x - - - . x - x - - - .	. ST0113 . ST0113	
			88 □ 63A 90A 115A	N40 . N61 . N80 .	x - x - - - . x - x - - - . x - x - - - .	. ST0113 . ST0113 . ST0113	
			132 □ 150A 250A	N100 . N200 .	x - x - - - . x - x - - - .	. ST0113 . ST0113	

**Ordering example:** AC21 250A panel mounting, multi step switch 3-pole with off, 11 steps N200 E ST0113

## Mini-Cam Switches M4H

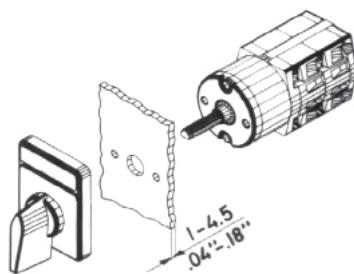
Panel mounting E, IP40



Central fixing Z





Central fixing without escutcheon plate ZO




Mounting holes

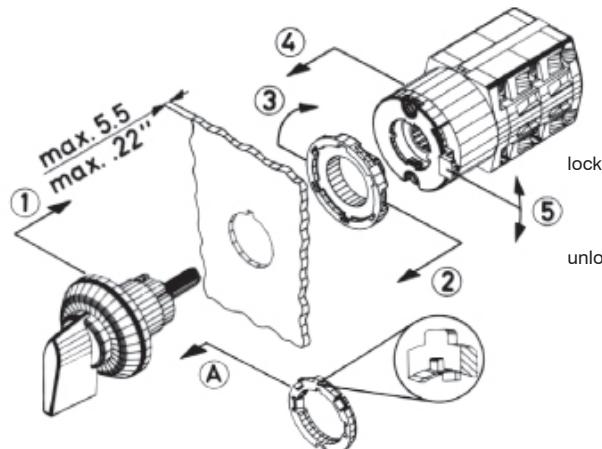
D366-f



Central fixing 16mm



unlock Central fixing 22mm




Single hole mountings are generally delivered for a 16mm (.64") mounting.  
Using the forwarded adapter ring, it is possible to alter the single hole mountings from 22mm (.88"). For that purpose the adapter ring has to be attached onto the threaded part of the body in such a manner, that  
1. the flat side of the adapter ring shows towards the front seal and  
2. the inner nose fits into the notch of the body.  
The adapter ring has to be pushed towards the front seal.


Optional extras	ordering code	for design	M4H Z ... +SRE	M4H Z ... +SA.	M4H ZO ... +SA.	M4H Z ... +SRE+SA.
Additional escutcheon plate	+SRE	E, Z, ZO				
Additional escutcheon plate	+SRE2	E, Z, ZO				
Key operated switch with lock KABA with lock Ronis	+SA1 +SA2	Z, ZO Z, ZO				

**Wrench J7400**  
for switches M4H with central fixing is necessary

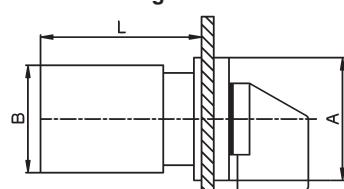
Panel mounting E




Central fixing Z, ZO

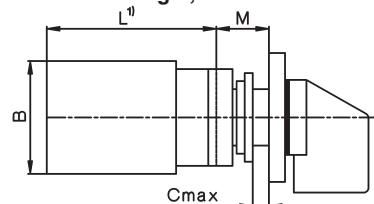

ZO



Z



Type	A	B	D	M	Dimension L for ... cells							
					1	2	3	4	5	6	7	8
M4H mm	30	28	29,5	12,5	38,5	50,5	62,5	74,5	86,5	98,5	110,5	122,5

Technical data

Type	according to specifications	AC21A	AC15	Motor rating AC3								
		General use	110V 380V 240V 440V Pilot Duty	Volt	3 phase 3-pole	1 phase 2-pole						
M4H	IEC, VDE, BS, SEV UL, CSA	10A/500V 10A/300V	2,5A A300	1,5A	kW HP	0,65 0,75	1,5 1	2,2 -	0,3 0,33	0,55 0,75	- 0,75	380 440

Type	according to specifications	Volt	Motor rating AC23	3-pole	2-pole
			110 220 380	110 220 380	120 240 440
M4H	IEC, VDE, BS, SEV UL, CSA	kW HP	0,75 -	1,8 -	3 -

additional data for wiring according to UL and CSA			
Type	type of wire	temp. rating of wire	torque value for field wiring terminals
M4H	copper wire only	60/75°C	0,6Nm / 5lb - inch

# Mini-Cam Switches M4H

## Switch programs

Description	Wiring diagram	AC21 500V 10A AC15 230V 2,5A AC3 4x400V 2,2kW	escutch. 30 x 30	numb. of cells	Type	E. ↓	Z. ↓	ZO. ↓	Switch pro- gram
<b>On-Off-switch A</b>									
1-pole				1	M4H .	x	x	x	. A1
2-pole				1	M4H .	x	x	x	. A2
3-pole				2	M4H .	x	x	x	. A3
4-pole				2	M4H .	x	x	x	. A4
6-pole				3	M4H .	x	x	x	. A6
<b>Changeover switch U</b>									
1-pole				1	M4H .	x	x	x	. U1
2-pole				2	M4H .	x	x	x	. U2
3-pole				3	M4H .	x	x	x	. U3
4-pole				4	M4H .	x	x	x	. U4
<b>Changeover switch without off W</b>									
1-pole				1	M4H .	x	x	x	. W1
2-pole				2	M4H .	x	x	x	. W2
3-pole				3	M4H .	x	x	x	. W3
4-pole				4	M4H .	x	x	x	. W4
6-pole				6	M4H .	x	x	x	. W6
<b>Reversing switch WU</b>									
2-pole				2	M4H .	x	x	x	. WU2
3-pole				3	M4H .	x	x	x	. WU3
3-pole with spring return to 0				3	M4H .	x	x	x	. WU3R2
<b>Star-delta switch SD</b>									
1 rotary direction				4	M4H .	x	x	x	. SD
both rotary directions				5	M4H .	x	x	x	. SDR
<b>Changeover with spring return UR</b>									
1-pole				1	M4H .	x	x	x	. UR1
2-pole				2	M4H .	x	x	x	. UR2
3-pole				3	M4H .	x	x	x	. UR3
<b>Start switch</b>									
1-pole				1	M4H .	x	x	x	. SE
<b>Stop switch</b>									
1-pole				1	M4H .	x	x	x	. SA

Ordering example: Stop switch, 1-pole, Central fixing: M4H Z SA

# Mini-Cam Switches M4H

## Switch programs

Description	Wiring diagram	AC21 500V 10A AC15 230V 2,5A AC3 4x400V 2,2kW	escutch. 30 x 30	numb. of cells	Type	Design .E. ↓ .Z. ↓ .ZO. ↓	Switch pro- gram
Start-Stop switch				1	M4H .	x x x . SEA	
Start-Stop switch position START with spring return to 1				1	M4H .	x x x . S392	
Start-Stop switch for reversing contactors				2	M4H .	x x x . S2EA	
Voltmeter selector switch V 3 line voltages				2	M4H .	x x x . V3	
3 phase voltages				2	M4H .	x x x . V0	
3 line voltages 3 phase voltages				3	M4H .	x x x . V1	
Ammeter selector switch A 1-pole, 3 current transformer				4	M4H .	x x x . M31	
Gang switch GR 2 circuits A and B 1-pole 0 - A - A+B				1	M4H .	x x x . GR11	
2 circuits A and B 1-pole 0 - A - B - A+B				1	M4H .	x x x . GR12	
3 circuits A, B and C 1-pole				2	M4H .	x x x . GR14	
Multi step switch without 0 ST 3 steps, 1-pole				2	M4H .	x x x . ST31	
3 steps, 2-pole				3	M4H .	x x x . ST32	
3 steps, 3-pole				5	M4H .	x x x . ST33	

Ordering example: Multi step switch without 0, 3 steps, 3-pole, panel mounting: M4H E ST33









# Mini-Cam Switches M4H

## Switch programs


Description	Wiring diagram	AC21 500V 10A AC15 230V 2,5A AC3 4x400V 2,2kW	escutch. 30 x 30	numb. of cells	Type	Design .E. ↓	Design .Z. ↓	Design .ZO. ↓	Switch pro- gram
<b>Multi step switch without 0 ST</b>									
<b>4 steps, 1-pole</b>	5 7      13 15      21 23 ○ ○      ○ ○      ○ ○			2	M4H .	x	x	x	. ST41
<b>4 steps, 2-pole</b>	1○—○ 2○—○ 3      9○—○ 10○—○ 11      17○—○ 18○—○ 19			4	M4H .	x	x	x	. ST42
<b>4 steps, 3-pole</b>				6	M4H .	x	x	x	. ST43
<b>5 steps, 1-pole</b>	5 9      17 11 ○ ○      ○ ○			3	M4H .	x	x	x	. ST51
<b>5 steps, 2-pole</b>	1○—○ 2○—○ 3      13○—○ 12○—○ 15 ○ 7      ○ 19			5	M4H .	x	x	x	. ST52
<b>6 steps, 1-pole</b>	5 9      17 21 ○ ○      ○ ○			3	M4H .	x	x	x	. ST61
<b>6 steps, 2-pole</b>	1○—○ 2○—○ 3      13○—○ 14○—○ 15 ○ 11      ○ 23      ○ 19			6	M4H .	x	x	x	. ST62
<b>Multi step switch with 0 ST0.</b>									
<b>2 steps, 1-pole</b>	1 3      5 7      9 11 ○ ○      ○ ○      ○ ○			1	M4H .	x	x	x	. ST021
<b>2 steps, 2-pole</b>	—○ 2      —○ 6      —○ 10			2	M4H .	x	x	x	. ST022
<b>2 steps, 3-pole</b>				3	M4H .	x	x	x	. ST023
<b>3 steps, 1-pole</b>	1 5      9 7      11 11 ○ ○ ○      ○ ○      ○ ○			2	M4H .	x	x	x	. ST031
<b>3 steps, 2-pole</b>	—○ 2      —○ 8      —○ 10			3	M4H .	x	x	x	. ST032
<b>3 steps, 3-pole</b>	1 5      9 7      11 13 17 ○ ○ ○      ○ ○      ○ ○ ○			5	M4H .	x	x	x	. ST033
<b>4 steps, 1-pole</b>	5 3 7      13 11 15      21 19 23 ○ ○ ○      ○ ○ ○      ○ ○ ○			2	M4H .	x	x	x	. ST041
<b>4 steps, 2-pole</b>	—○ 2      —○ 10      —○ 18			4	M4H .	x	x	x	. ST042
<b>4 steps, 3-pole</b>				6	M4H .	x	x	x	. ST043
<b>5 steps, 1-pole</b>	5 9 3      17 11 15 ○ ○ ○      ○ ○ ○			3	M4H .	x	x	x	. ST051
<b>5 steps, 2-pole</b>	—○ 2      —○ 12      —○ 19			5	M4H .	x	x	x	. ST052
<b>6 steps, 1-pole</b>	5 9 3      17 11 15 ○ ○ ○      ○ ○ ○			4	M4H .	x	x	x	. ST061
<b>7 steps, 1-pole</b>	9 13 15      1 11 ○ ○ ○      ○ ○			4	M4H .	x	x	x	. ST071
<b>8 steps, 1-pole</b>	5 9 11      17 11 15 ○ ○ ○      ○ ○ ○			5	M4H .	x	x	x	. ST081
<b>9 steps, 1-pole</b>	5 9 13      17 11 15 ○ ○ ○      ○ ○ ○			5	M4H .	x	x	x	. ST091
<b>10 steps, 1-pole</b>	5 9 13      17 11 15 ○ ○ ○      ○ ○ ○			6	M4H .	x	x	x	. ST0101

**Ordering example:** Multi step switch with 0, 10 steps, 1-pole, Central fixing without escutcheon plate: **M4H ZO ST0101**

## Load Switches for resistive or slightly inductive loads or switching without load

Description	Wiring diagram	Switching angle ↓ Size ↓ AC21	Number of cells	Type ↓ E. ↓ V.	Design ↓	Switch pro-gram	Escutcheon plate
<b>On-Off-switches A</b>							
<b>1-pole</b>	L1 	60°	2 88 □ 125A 1 180A	L100 . L160 .	x x x x	. A1 . A1	
			1 132 □ 400A 3 600A 2 800A 3 1200A	L400 . L600 . L800 . L1200 .	x x x x x x x x	. A1 . A1 . A1 . A1	
<b>2-pole</b>	L1 L2 	60°	2 88 □ 125A 2 180A	L100 . L160 .	x x x x	. A2 . A2	
			2 132 □ 400A 3 600A 4 800A 6 1200A	L400 . L600 . L800 . L1200 .	x x x x x x x x	. A2 . A2 . A2 . A2	
<b>3-pole</b>	L1 L2 L3 	60°	4 88 □ 125A 3 180A	L100 . L160 .	x x x x	. A3 . A3	
			3 132 □ 400A 6 600A 6 800A 9 1200A	L400 . L600 . L800 . L1200 .	x x x x x x x x	. A3 . A3 . A3 . A3	
<b>4-pole</b> <b>4. pole early make</b>		60°	4 88 □ 125A 4 180A	L100 . L160 .	x x x x	. A4 . A4	
			4 132 □ 400A 6 600A 8 800A 12 1200A	L400 . L600 . L800 . L1200 .	x x x x x x x x	. A4 . A4 . A4 . A4	
<b>6-pole</b>	1 3 5 7 9 11 2 4 6 8 10 12 	60°	6 88 □ 125A 6 180A	L100 . L160 .	x x x x	. A6 . A6	
			6 132 □ 400A 9 600A 12 800A 18 1200A	L400 . L600 . L800 . L1200 .	x x x x x x x x	. A6 . A6 . A6 . A6	

For switches with the design V.. it is necessary to state the installation depth - that is, the distance between mounting level of the switch and the inside edge of the door (dimension T).



Further informations

page






Technical Data  
Dimensions

261  
266







**Load Switches** for resistive or slightly inductive loads or switching without load

Description	Wiring diagram	Switching angle ↓ Size ↓ AC21	Number of cells	Type ↓ .E. ↓ .V.	Design ↓ .U.	Switch pro- gram	Escutcheon plate
-------------	----------------	-------------------------------------	-----------------	------------------------	-----------------	------------------------	---------------------

**Changeover switches U**

<b>1-pole</b>		60°	2 88 □ 125A	L100 . x x	. U1	
			2 180A	L160 . x x	. U1	
			2 132□ 400A	L400 . x x	. U1	
			3 600A	L600 . x x	. U1	
			4 800A	L800 . x x	. U1	
			6 1200A	L1200 . x x	. U1	
			2 88 □ 125A	L100 . x x	. U2	
			4 180A	L160 . x x	. U2	
			4 132□ 400A	L400 . x x	. U2	
			6 600A	L600 . x x	. U2	
<b>2-pole</b>		60°	4 88 □ 125A	L100 . x x	. U2	
			4 180A	L160 . x x	. U2	
			4 132□ 400A	L400 . x x	. U2	
			6 600A	L600 . x x	. U2	
			8 800A	L800 . x x	. U2	
			12 1200A	L1200 . x x	. U2	
			6 88 □ 125A	L100 . x x	. U3	
			6 180A	L160 . x x	. U3	
			6 132□ 400A	L400 . x x	. U3	
			9 600A	L600 . x x	. U3	
<b>3-pole</b>		60°	12 800A	L800 . x x	. U3	
			18 1200A	L1200 . x x	. U3	
			8 88 □ 125A	L100 . x x	. U4	
			8 180A	L160 . x x	. U4	
			8 132□ 400A	L400 . x x	. U4	
			12 600A	L600 . x x	. U4	
			16 800A	L800 . x x	. U4	
			24 1200A	L1200 . x x	. U4	

**Changeover switches without off W**

<b>1-pole</b>		60°	2 88 □ 125A	L100 . x x	. W1	
			2 180A	L160 . x x	. W1	
			2 132□ 400A	L400 . x x	. W1	
			3 600A	L600 . x x	. W1	
			4 800A	L800 . x x	. W1	
			6 1200A	L1200 . x x	. W1	
			4 88 □ 125A	L100 . x x	. W2	
			4 180A	L160 . x x	. W2	
			4 132□ 400A	L400 . x x	. W2	
			6 600A	L600 . x x	. W2	
<b>2-pole</b>		60°	4 88 □ 125A	L100 . x x	. W2	
			4 180A	L160 . x x	. W2	
			4 132□ 400A	L400 . x x	. W2	
			6 600A	L600 . x x	. W2	
			8 800A	L800 . x x	. W2	
			12 1200A	L1200 . x x	. W2	
			6 88 □ 125A	L100 . x x	. W3	
			6 180A	L160 . x x	. W3	
			6 132□ 400A	L400 . x x	. W3	
			9 600A	L600 . x x	. W3	
<b>3-pole</b>		60°	12 800A	L800 . x x	. W3	
			18 1200A	L1200 . x x	. W3	
			8 88 □ 125A	L100 . x x	. W4	
			8 180A	L160 . x x	. W4	
			8 132□ 400A	L400 . x x	. W4	
			12 600A	L600 . x x	. W4	
			16 800A	L800 . x x	. W4	
			24 1200A	L1200 . x x	. W4	

**Ordering example:** AC1 1200A panel mounting, changeover switch without off 4-pole **L1200 E W4**

## Operating Knobs and Handles

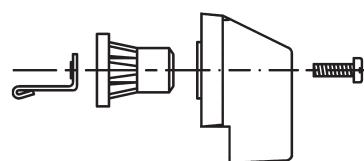
### Types of handles

In the standard version, the switches are supplied with a black twist knob or instrument knob (M10H - N33F), except for design SMA, which has a grey toggle knob. Switches of size L, which consist of 2 or 3 switch columns, come with a black hand wheel. If required, the switch can be supplied with other knobs, which can later easily be exchanged. All operating knobs have an insert, which sets the position of the knob in relation to the switch shaft. This insert can be mounted in 8 different positions (at intervals of 45°), causing the angle of each individual switch setting to be rotated by 45°.

All operating knobs can be moved on the hexagonal shaft, to permit adaptation to different sheet thicknesses, etc.

Type	M10	M10H	N20	N33F	N40	N61	N80	L100	L200
Knob movement mm	5		5		7		9		
Hexagonal shaft dimension mm	5		7		9		12		

**Ordering example:** Cam switch N61 V U3 with Instrument knob red  
**Order type:** N61 V U3 +G3  
**Dimensions** see page 267



In the standard version, the switch terminals are positioned left and right (except M10H). When the knob insert is turned by 90°, the lay-out of the terminals changes to top and bottom.



Knobs and handles Description	Colour	Ordering Code	M10	M10H	N20	N33F	N40	N61	N80	L100	L200
<b>Instrument knob</b> Standard for M10 to N200	grey black red white	+G1 +G2 +G3 +G5	X		X			X			X
<b>Toggle knob</b>	grey black red white blue	+K1 +K2 +K3 +K5 +K6	X		X						
<b>Hand wheel</b>	black	+HR									X


## Escutcheon Plates

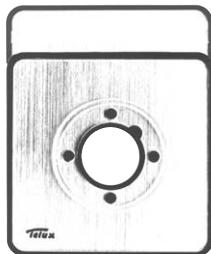**TELUX-Cam Switches** in designs E, V, P, PF, SM, UP, Z and KE are supplied with a square escutcheon plate consisting of a black frame and plexi insert plate. The markings are printed in black are on the back of the insert plate. To protect the markings so that they remain easy to read, the back of the insert plate is lined with silver foil. In addition, rectangular plates can be provided for all switch sizes, which can fitted on all switches after mounting.

Square plate



Rectangular plate  
(with square plate)  
Slot on the cover plate  
upper side



Preferred position of the slot  
on bottom of  
the cover plate

Slot for additional plate

**TELUX-Cam Switches** in design SMA, for distribution boards with 45mm inside edge of installation cover, is supplied with a grey cover and black markings.



**Special engraved markings** on escutcheon plates are limited by the available space. In the case of relatively large production runs or frequent use of the text, we recommend ordering of a printing block. This will be invoiced at cost price, and the engraving will not be charged for. This investment generally pays with batches from 50 pieces upwards.

The "escutcheon plate" column of the selection and ordering tables for switch programs indicates the standard plate and, in some cases, an additional plate that is often used for the programs in question. If such a plate, listed in the selection table, is desired, the appropriate code number should be stated when ordering a switch and switch program.

Should only **plates** or **parts** of the latter be ordered, the order type is assembled as shown by the following example.

**Code letter** of switch sizes

M10, M10H, M20	A
N20, N33F	E
N40, N61, N80, L100, L160	H
N100, N200, L400, L600, L800, L1200	L

**Ordering example:** Escutcheon plate silver, complete, for cam switch M10, marked with MAN OFF AUTO, angle of rotation 60°

Order type:

A85009		
<b>Switch size</b> Code letter for M10, M10H and M20	<b>Plate</b> Art.No. for standard plate with markings, complete	<b>Marking</b> Code number with label MAN OFF AUTO angle of rot. 60°

However, if a **switch** with non-standard lettering is required, only three-digit code number for the marking need be added to the order type (see next page).

**Dimensions** see page 267

Description	Order type Switch size Code letter	Plate Art.No.	Marking Code number
<b>Escutcheon plate for designs E, V, P, Z, SM, KE and UP</b> Escutcheon frame black, plexi insert plate silver, markings black			
Plexi insert plate silver	A	.85...	... (see pp. 244-248)
Plexi insert plate yellow	A	.80...	... (see pp. 244-248)
Escutcheon frame black	A	.8203	-
<b>Rectangular escutcheon plate for designs E, V, Z and SM</b> Escutcheon frame black, plexi insert plate silver, markings black			
Plexi insert plate silver	A	.885..	... (see pp. 244-248)
Plexi insert plate yellow	A	.895..	... (see pp. 244-248)
Escutcheon frame black	A	.8503	-
<b>Installation cover for design SMA</b> grey cover, markings black	A - - -	.68...	... (see page 246)

## Escutcheon Plates

### Selected standard markings

The markings that are most commonly required are shown below, together with code letters for the switch size and the code number.

**Ordering example:** Switch type M10H E A3 with escutcheon plate "OFF ON" and additional rectangular escutcheon plate "PUMP"

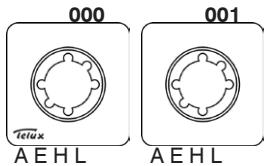
Order type: **M10H E A3 +003 +516**

### Code letter of switch sizes


M10, M10H, M20  
N20, N33F  
N40, N61, N80, L100, L160  
N100, N200, L400, L600, L800, L1200

A  
E  
H  
L


### Blank escutcheon plates



### Switching angle 30°

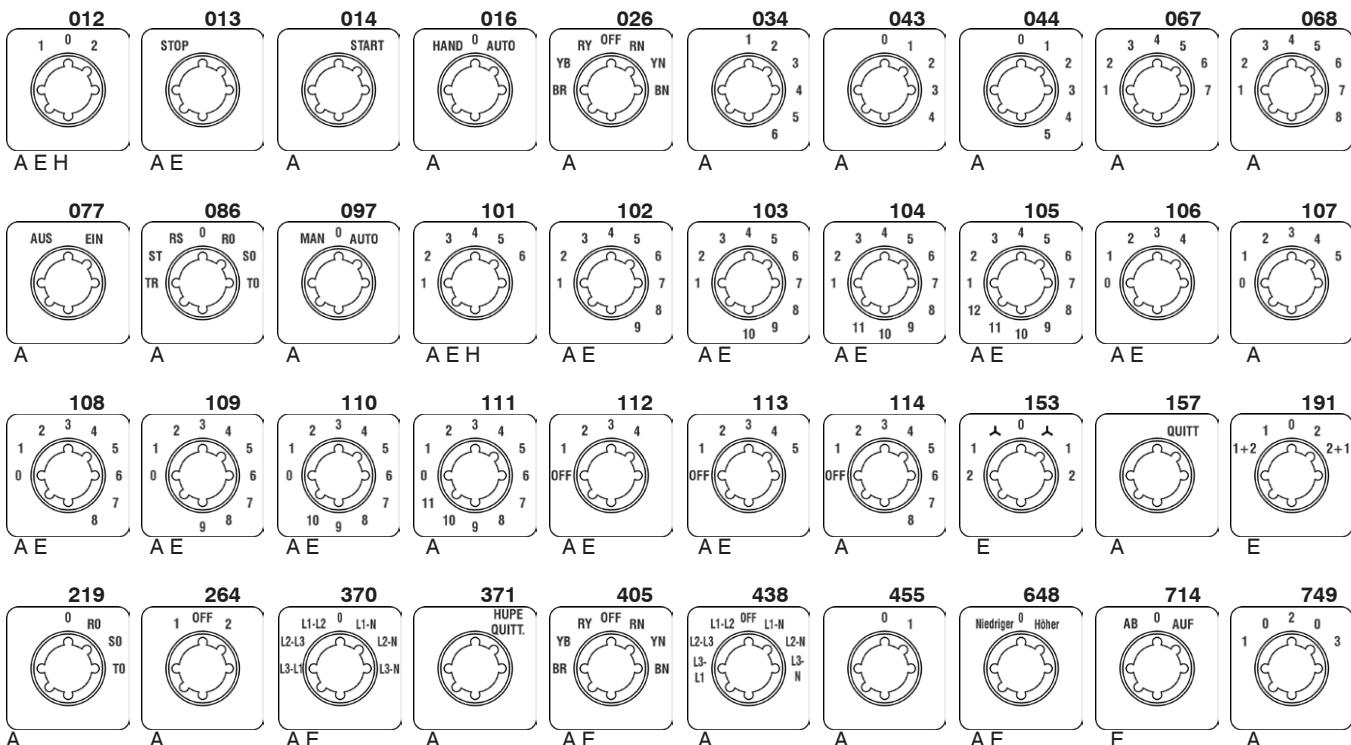


### Switching angle 45°

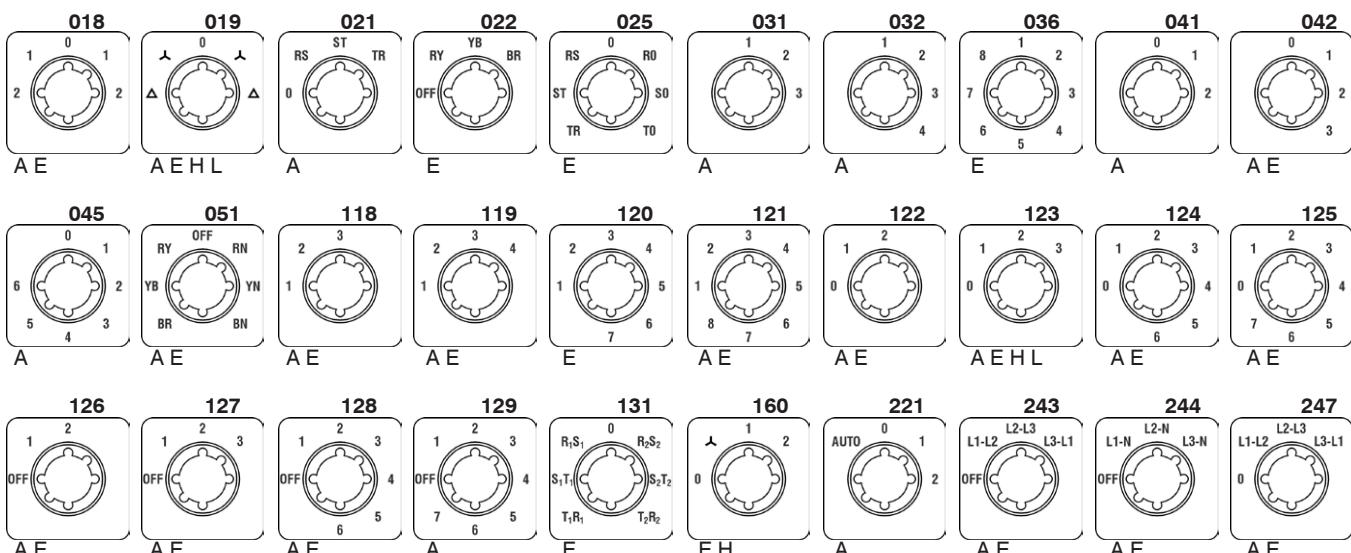


## Escutcheon Plates

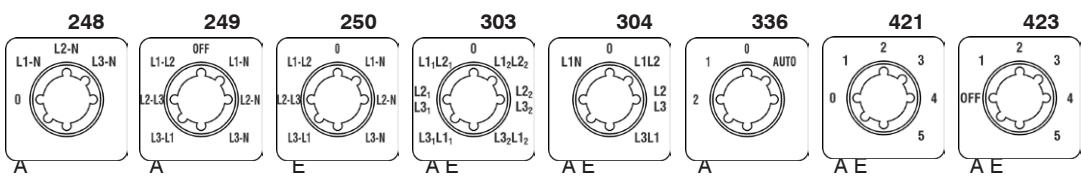Switching angle 45°




Switching angle 60°

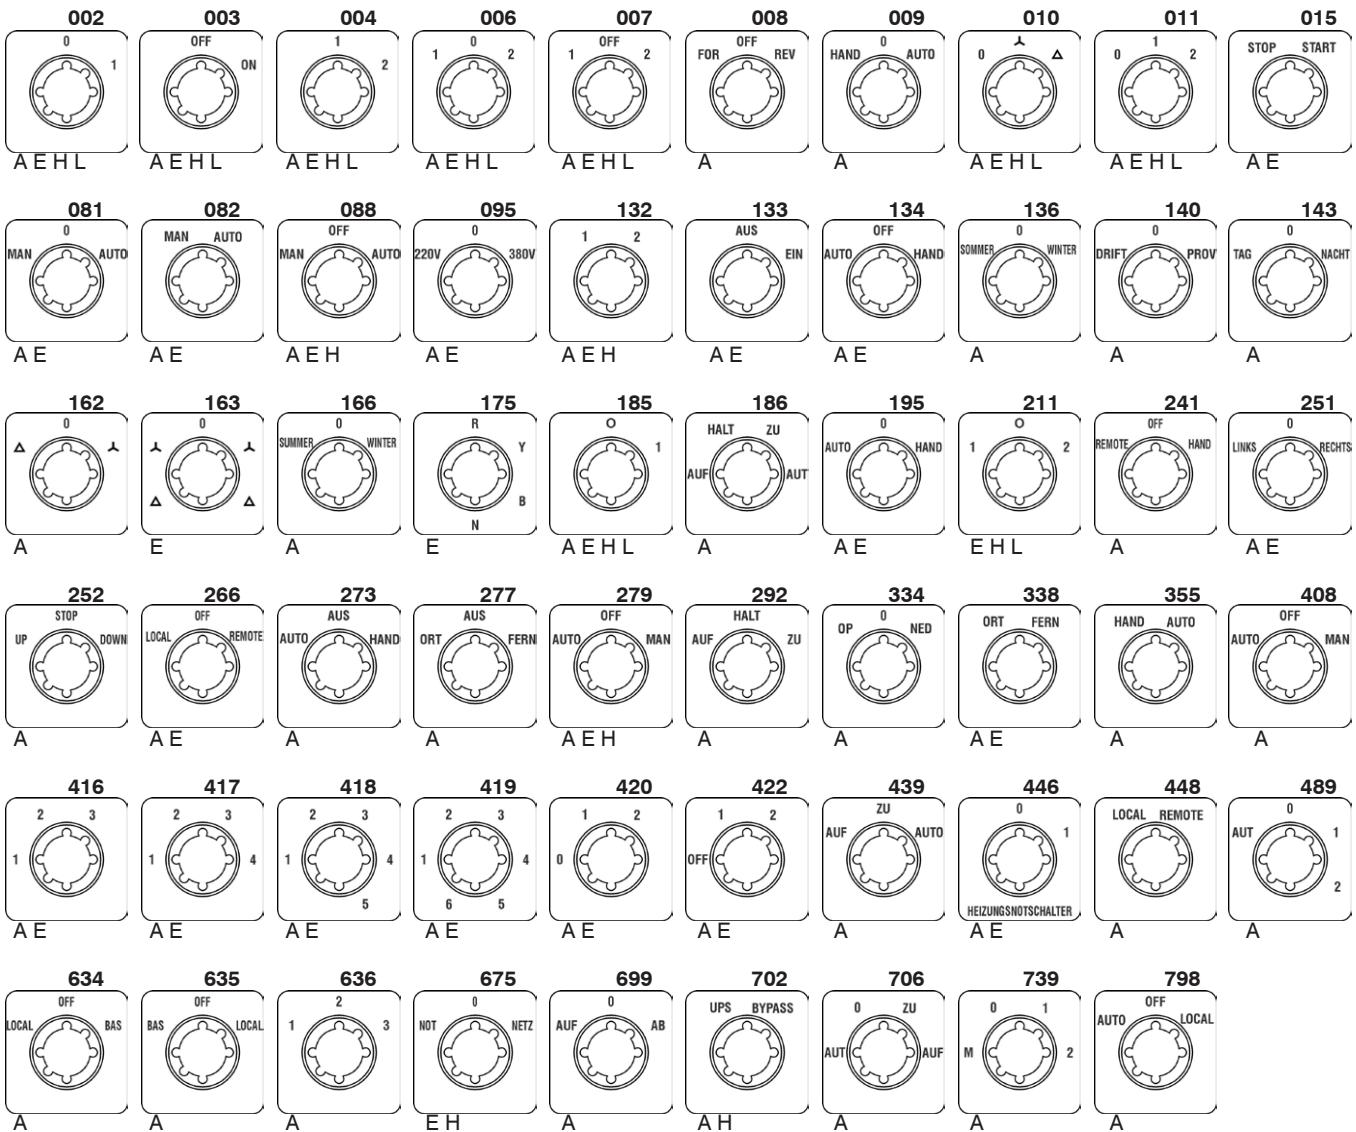


## Escutcheon Plates

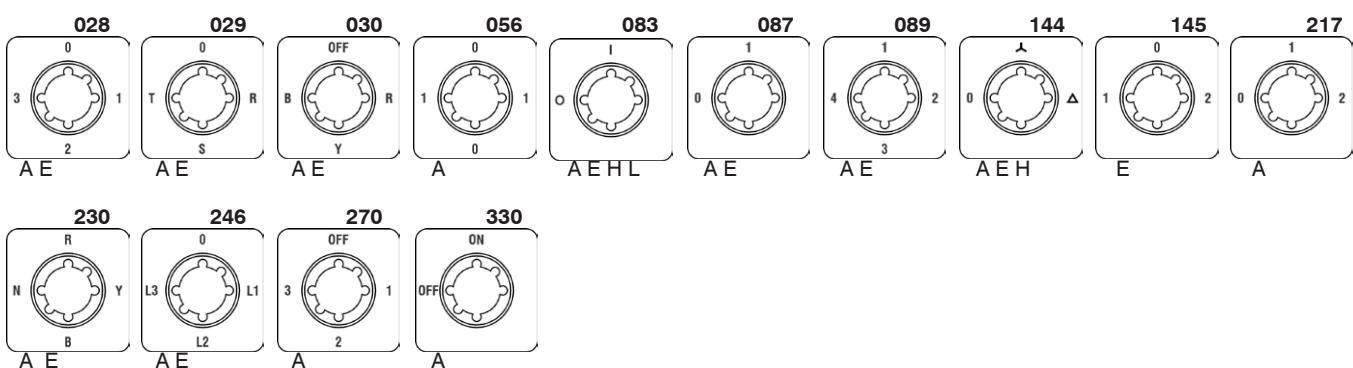
Switching angle 90°




## Miscellaneous

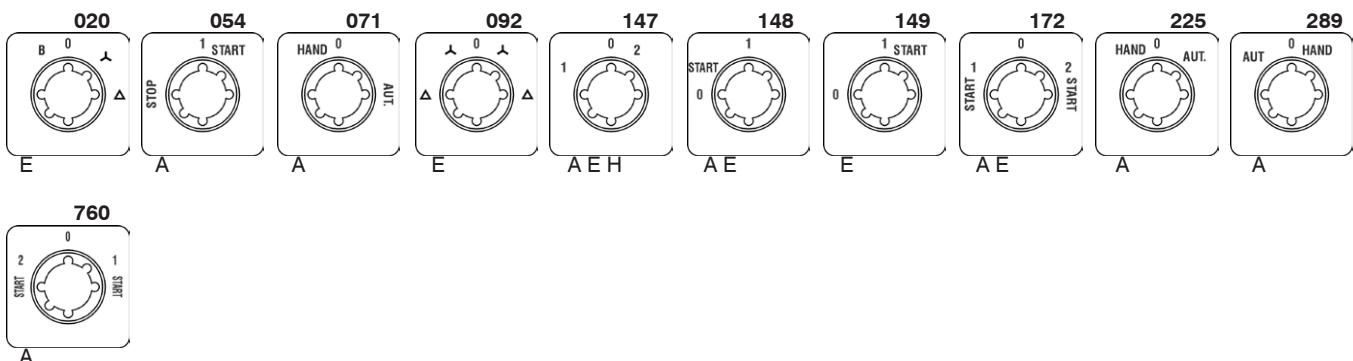

## Rectangular additional escutcheon plates

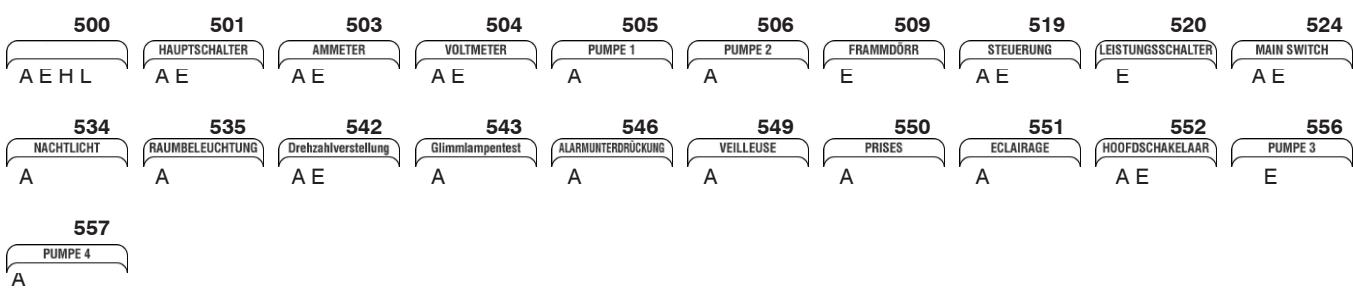

## Covers for design SMA

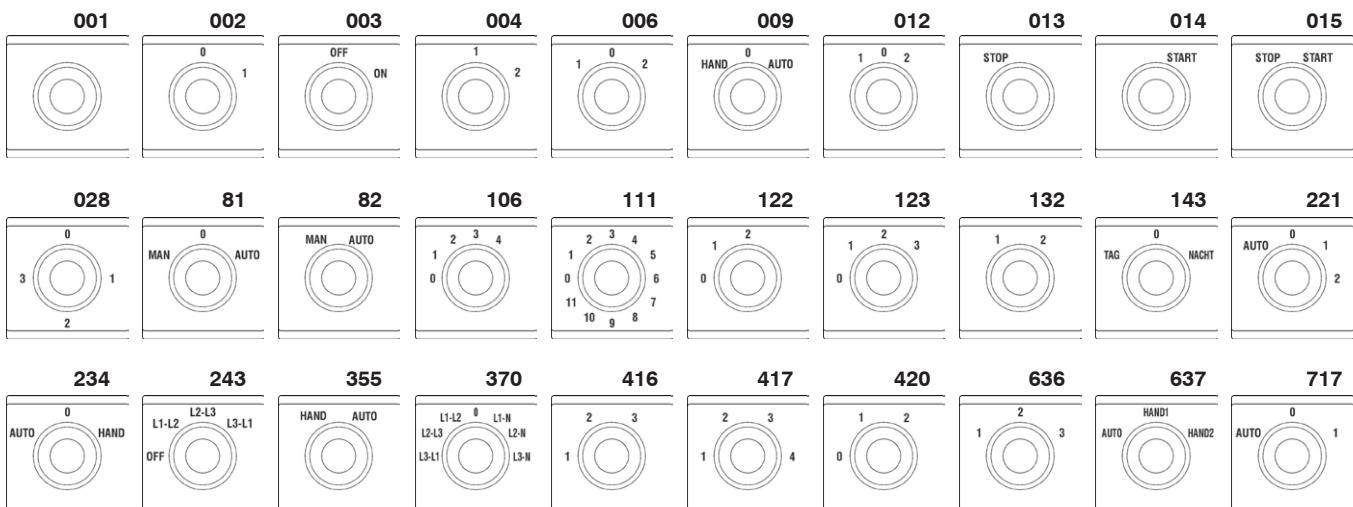

## Switching angles

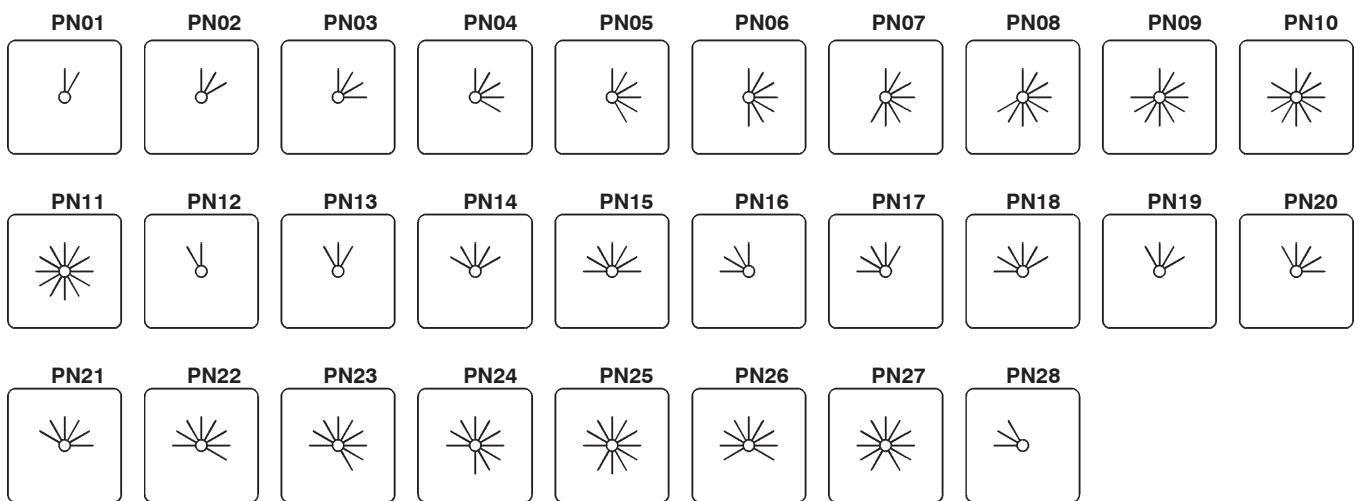
### Arrangement of switch settings

All feasible arrangements of switch settings are shown, and defined by position numbers, in the following tables. Not only the switching angles, but also switches with latched or momentary settings, or combinations of the two, are distinguished from one another.


Knowledge of the following variations is particularly important when planning special switches. It is necessary to state the position number when ordering special switches, as the cheapest version will otherwise be selected.

All the switches types listed can be supplied with switching angles other than those indicated, provided that they are permitted by the switch program (additional charge).


#### Switching angle 30°




#### Switching angle 45°

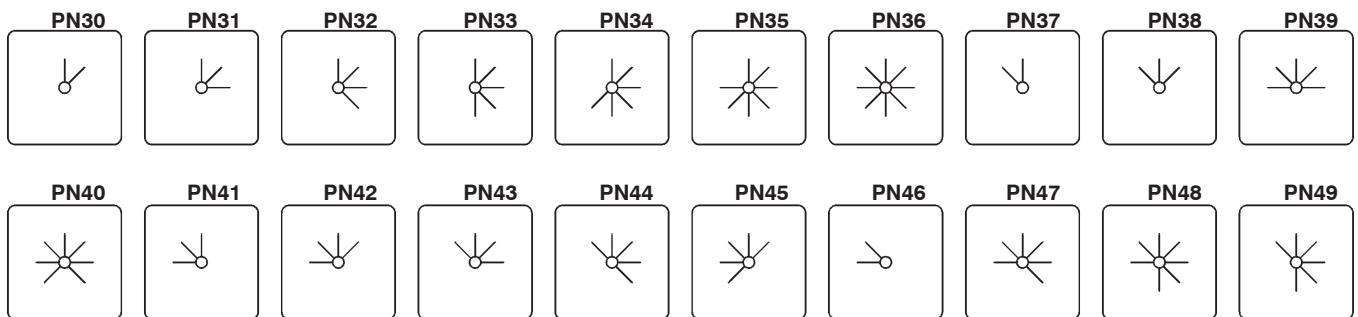

#### Switching angle 60°

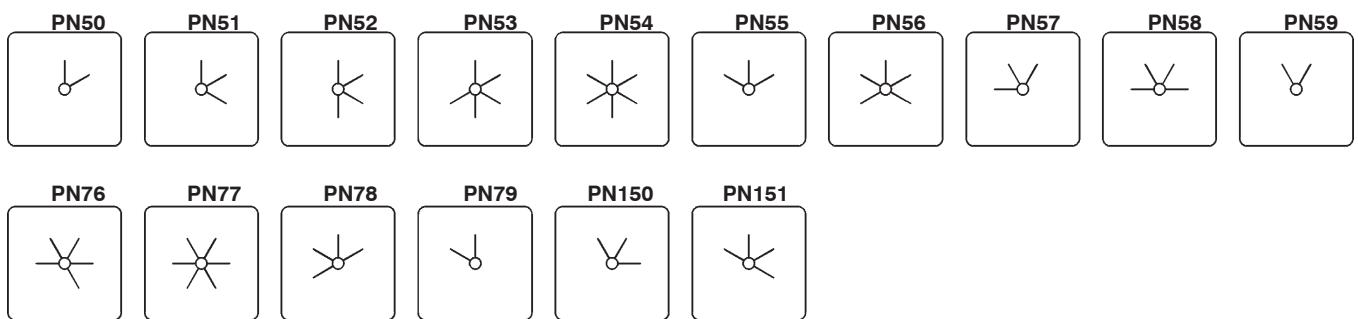


#### Switching angle 45/90°

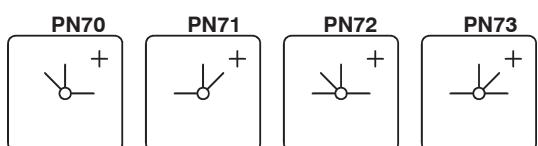


+ ) Not available for switch types M10, M10H and M20

## Switching angles

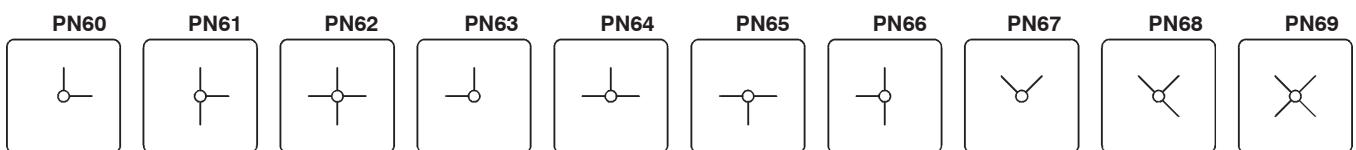
### Switching angle 90°



### Momentary settings and special combinations

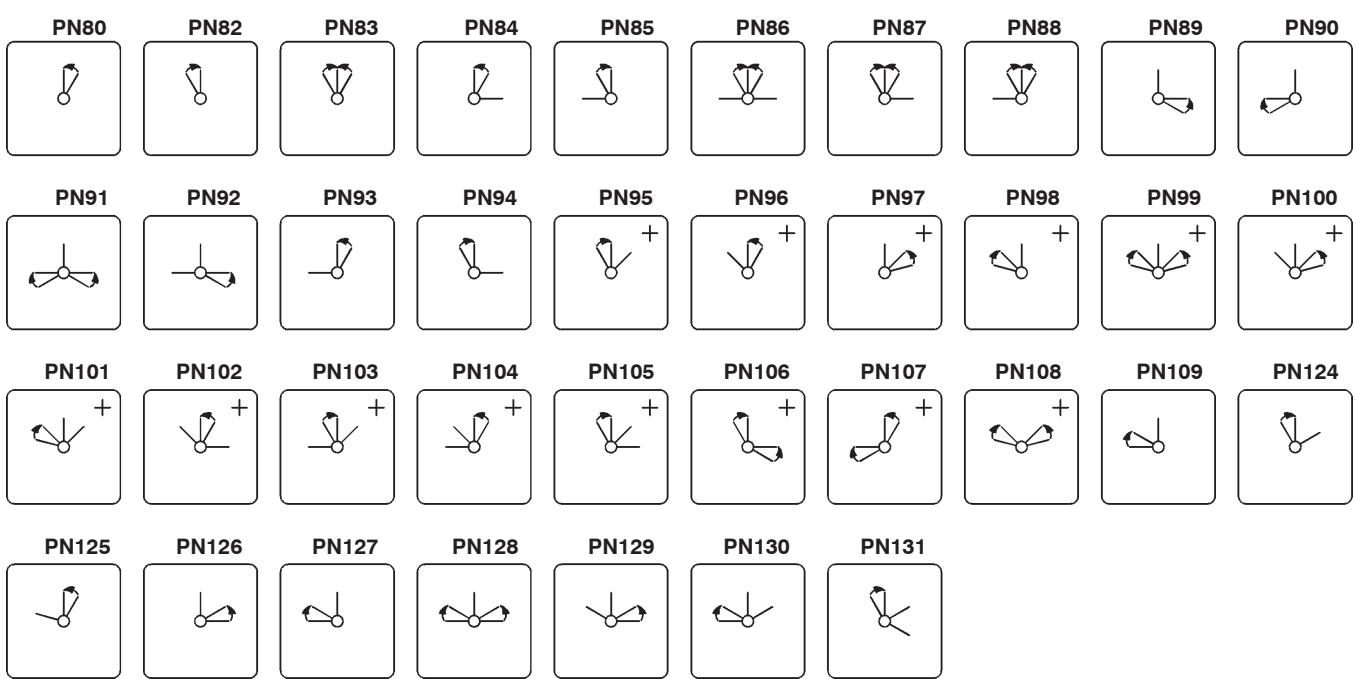

### Spring return over several settings

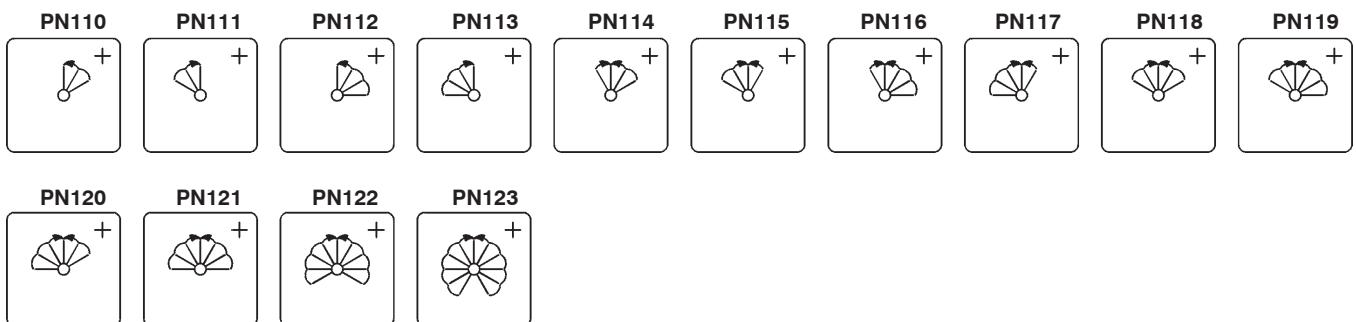

+) Not available for switch types M10, M10H and M20

Contactors, Motor-Starter

Circuit Breakers

Manual Motor-Starters

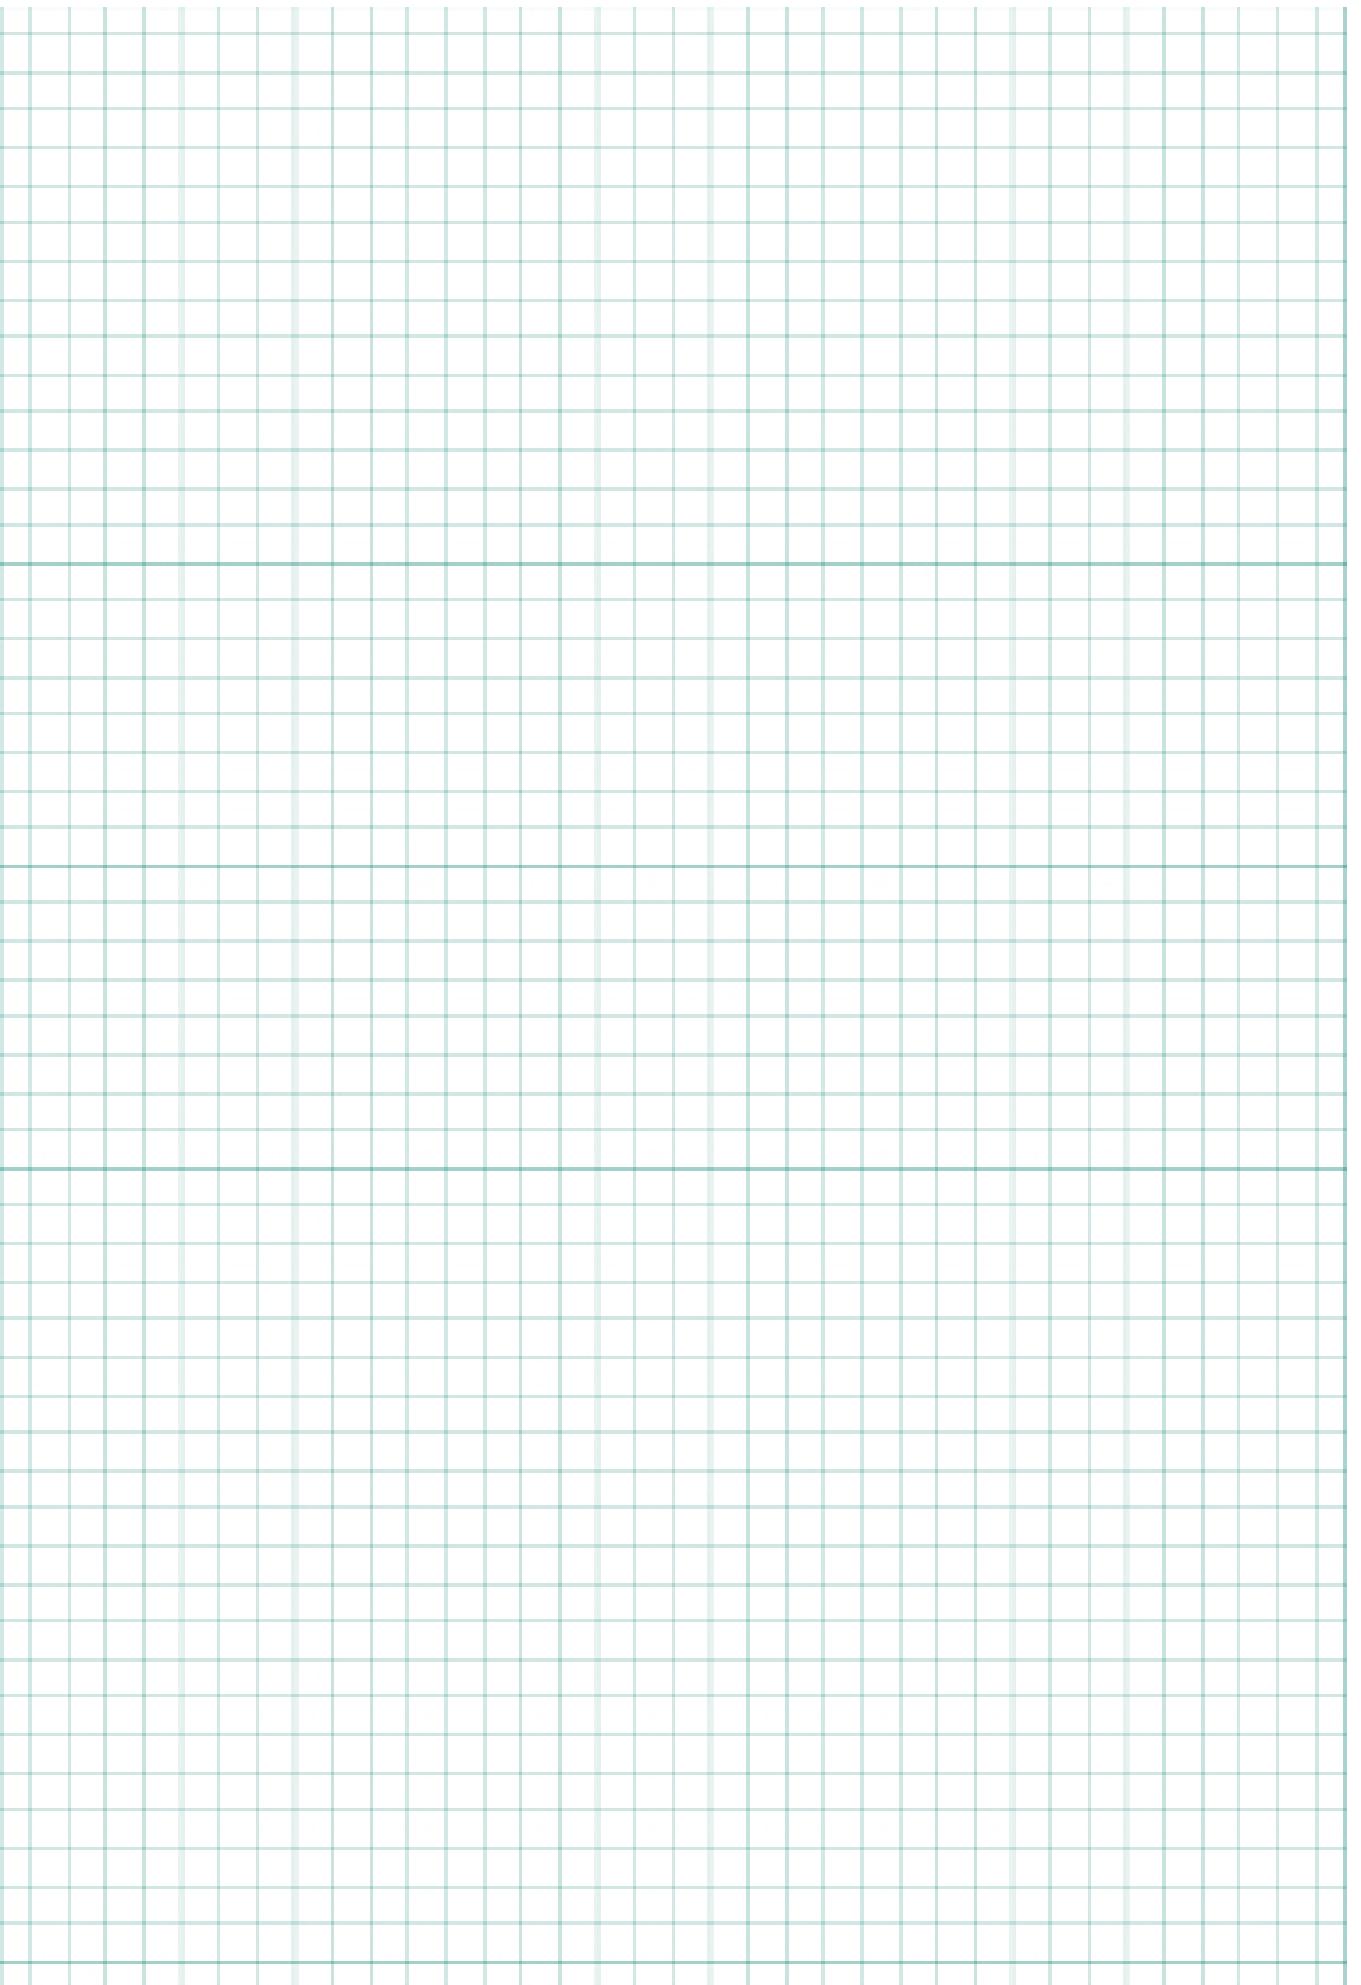
Switches

AC-Main Switches

DC-Switch Disconnector


Push Buttons

Representatives, Suppliers



## Door couplings

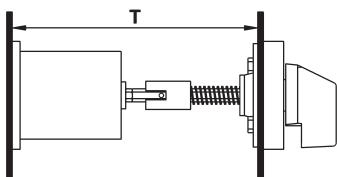For switches with door couplings it is necessary to state the installation depth - that is, the distance between mounting level of the switch and the inside edge of the door (dimension T).



Door couplings are available for switches to be installed in switchgear cabinets or distribution boards with hinged doors. These permit the doors to be opened without removal of the operating knobs.

**Ordering example:** Cam switch N100 V A3 with lockable door coupling, moisture protected IP65, dimension T=580mm  
Order type: **N100 V A3 +TK2FR/580**

**Dimensions** see page 269



	<b>Ordering Code</b>	Suitable for designs	Suitable for switch type
<b>Door coupling</b> Protection class from front: IP65 5-hole mounting	+TKE/...	V, SM	M10H, M20, N20, N33F
<b>Door coupling locked</b> Protection class from front: IP65 5-hole mounting Doors only open at a given switch setting: unless otherwise stated, the "OFF" setting.	+TK2E/...	V, SM	M10H, M20, N20, N33F
<b>Door coupling locked</b> Protection class from front: IP65 Central fixing Ø22mm Doors only open at a given switch setting: unless otherwise stated, the "OFF" setting.	+TK2Z/...	V, SM	M10H, M20, N20, N33F
<b>Door coupling</b> Protection class from front: IP40 5-hole mounting	+TK/...	V	N40, N61, N80, N100, N200 L100, L160, L400, L600 L800
<b>Door coupling</b> Protection class from front: IP54 5-hole mounting	+TKFR/...	V	N40, N60, N80, N100, N200 L100, L160, L400, L600 L800
<b>Door coupling locked</b> Protection class from front: IP40 5-hole mounting Doors only open at a given switch setting: unless otherwise stated, the "OFF" setting.	+TK2/...	V	N40, N61, N80, N100, N200 L100, L160, L400, L600 L800
<b>Door coupling locked</b> Protection class from front: IP54 5-hole mounting Doors only open at a given switch setting: unless otherwise stated, the "OFF" setting.	+TK2FR/...	V	N40, N61, N80, N100, N200 L100, L160, L400, L600 L800

## Lockable switches

Key-operated and lockable switches are supplied with two keys. Additional keys or other types of lock on request.

**Ordering example:** Cam switch N20 E A3 key operated  
Order type: **N20 E A3 +SA**

Dimensions see page 270 and 271



	Ordering Code	Suitable for designs	Suitable for switch type
<b>Key operated switch</b> Lock Willenthal FT101, key removable in all lockable settings. Other types of lock on request. Maximum number of cells M10 - N33F: 6    N40, N61: 2 <b>Key operated switch</b> , key removable only in some settings. Add letter offsetting where key is removable to ordering code according to the sketch below.	+SA  +SA/.	E, V, SM E, V P SMA UP	M10H, M20, N20, N33F N40, N61 M10, N20, N33F, N40, N60 M10H, M20 M10
<b>Key operated switch IP65</b> Lock Ronis R455, key removable in all lockable settings. <b>Key operated switch</b> , key removable only in some settings. Add letter of setting where key is removable to ordering code according to the sketch above.	+SA  +SA/.	Z, ZO	M10H, M20
<b>Key operated switch</b> Lock KABA8, key removable in all lockable settings. <b>Key operated switch</b> , key removable only in some settings. Add letter of setting where key is removable to ordering code according to the sketch below.	+SAK  +SAK/.	E	M10H, M20
<b>Key operated switch with barrel for special security functions</b> Lock EVVA EHZ50/5 Nickel matt Special version which prevents not only switching but also access to the cable ends and removal of the switch when locked. Maximum number of cells Design E, P:                          4 Design UP :                            3	+SASI	E P UP	M10H, M20 M10, M20 M10, M20
<b>Key operated switch for special security functions without lock</b> for use of lock EVVA EHZ50/5 or with same dimensions Maximum number of cells Design E, P:                          4 Design UP :                            3	+SASO	E P UP	M10H, M20 M10, M20 M10, M20

## Padlock devices

A range of padlock devices designed to prevent from being turned on by unauthorized personnel, or during maintenance and repair work, can be supplied.

**Dimensions** see page 272

**Ordering example:** Cam switch N33F E A3 with interlocking device SV3 suitable for 3 padlocks  
Order type: **N33F E A3 +SV3**




Padlock device Description	Ordering Code	Suitable for designs	Suitable for switch type
 <b>Padlock device</b> Standard version <b>black</b> , otherwise <b>red</b> , for 1 or 2 padlocks. Shackles up to Ø6mm Standard version <b>black</b> 64 x 64mm, otherwise <b>red</b> 64 x 64mm	+SV1 +SV1R  +SV164 +SV164R	E, V, SM P, PF  E, V P, PF	M10H, M20 M10  M10H, N20, N33F N20, N33F
 <b>Padlock device</b> Standard version <b>black</b> , otherwise <b>yellow</b> insert plate and <b>red</b> twist knob for 1-3 padlocks. Shackles up to Ø8,5mm Prior to insertion of the first padlock, a red locking ledge must be depressed. This indicates that the switch is locked.	+SV3 +SV3R E, V	E, V E, V L800, L1200 PF	N40, N61, N80, L100, L160 N100, N200, L400, L600,  N40, N61, N80, N100, N200
 <b>Padlock device</b> Standard base <b>grey</b> , locking ring <b>black</b> , or with <b>yellow</b> base and <b>red</b> locking ring. Locking ring for 1-3 padlocks. Shackles up to Ø6mm Standard base <b>grey</b> , locking ring <b>black</b> 88 x 88mm, or with <b>yellow</b> base and <b>red</b> locking ring 88 x 88mm	+SV4 +SV4R  +SV488 +SV488R	E, V SM P, PF  E, V E, V P, PF	M10H, N20, N33F M10H, N20, N33F N20, N33F  N20, N33F N40, N61, N80 N40, N61, N80
 <b>Key lock device</b> With a cylinder lock in the lock attachment, one or more switch settings are lockable (state when ordering). The operating knob can only be turned when unlocked. The key can be withdrawn whether locked or unlocked. Special versions, in which the key cannot be withdrawn when in some (unlockable) settings can be supplied.	+SZ	E, V SM	alle M10H, M20, N20, N33F
<b>Key lock device</b> Special version for on-off switches, in which it is possible to switch off without a key.	+SZ2	E, V SM	alle M10H, M20, N20, N33F

## Switch interlocks

A wide range of locks and interlocking devices, designed to prevent accidental or hazardous switching, can be supplied.

**Ordering example:** Cam switch N20 E A3 with push button switch lock  
Order type: **N20 E A3 +DV**

**Dimensions** see page 273



Description	Ordering Code	Suitable for designs	Suitable for switch type
<b>Push button interlock</b> The switch can only be actuated when the pushbutton is simultaneously depressed (two-handed operation).	+DV	E, V	all
<b>Interlock with electrical contact</b> The switch can only be actuated when the pushbutton, which also operates a make and break contact, is actuated (for external interlocking devices or safety measures).	+ET	E, V	all
<b>Magnetic interlock</b> The switch can only be actuated when an electromagnet is simultaneously excited. When ordering, voltage and percentage duty cycle of the magnet coil should be stated.	+MV	E	N20, N33F, N40, N61, N80 N100, N200
<b>Circular switch</b> Switches that have the maximum number of settings for a given switching angle can be made without a stop position, permitting direct switching from the last to the first setting.	+RU	all	all
<b>Backswitch 1</b> Special version of the circular switch, in which the switch can only be turned in one direction.	+RS1	all	all
<b>Backswitch 2</b> Special version of the circular switch, in which, in given positions, the switch can only be operated in one direction.	+RS2	all	all

## Couplings and stop mechanism

A range of couplings and stop mechanisms for trouble-free operation of switches with a very large number of contacts can be supplied.  
**Dimension** see page 274

**Ordering example:** Cam switch N200 V ST0113 spread over three columns interconnected by gears  
 Order type: **N200 V ST0113 +ZK3**




Description	Ordering Code	Suitable for designs	Suitable for switch type
<b>Coupling of two columns</b> For simultaneous drive of two switch columns (with very large number of switch cells or limited installation depth).	+ZK2	E, V	all
<b>Coupling of three columns</b> For simultaneous drive of three switch columns.	+ZK3	E, V	all
<b>Coupling of different switch sizes</b> For attachment of control switches (auxiliary contacts) to larger switches. M10H, M20 in sizes E and H. N20 to N80 in size L.	+ZWK	E L800, L1200	N40, N61, N80, L100, L160 N100, N200, L400, L600,
<b>Delayed action switch</b> Using a delayed action coupling, two switch shafts - a main shaft and delayed shaft - can be coupled, such that the delayed shaft is rotated together with the main shaft once a given angle of rotation is reached (e.g. for off-load return of switches used with pole-changing motors).	+SK	E, V G, GF	N20, N33F, N40, N61, N80 N20
<b>Second stop mechanism</b> With switches in which a large number of contacts is simultaneously operated, use of a second stop mechanism is sometimes necessary, in order to ensure precise switching to the next setting.	+RW2	all	all
<b>Metal stop mechanism</b> for extreme mechanical stress on the stop mechanism, e.g. where many contacts are switched at the same time. Not for PN110 to PN123	+MRW	E, V E, V L800, L1200 G, GF	N40, N61, N80, L100, L160 N100, N200, L400, L600, N20

## Special versions

A number of special versions can be supplied for adaptation of switches to various conditions of use.

**Ordering example:** Cam switch M10H E U3 with large front plate  
Order type: **M10H E U3 +GFP**



Description	Ordering Code	Suitable for designs	Suitable for switch type
<b>Switch shaft sealing</b> For increased front protection class on IP54.	+WD	E, V SM	N20 to L1200 N20, N33F
<b>Front plate/switch shaft sealing</b> For increased front protection class on IP65. In this version, a wider hole is required for the shaft. Dimensions see page 272	+FPWD	E, V, SM	N20, N33F
<b>Extended switch shaft</b> For adaptation of switch designs V and SM to the enclosure depth. State additional shaft length when ordering.	+VW/...	E, V SM	all M10H, M20, N20, N33F
<b>Large front plate</b> Switch with front plate and operating knob of the next size (for replacement of older, larger switches or aesthetic reasons).	+GFP	E, V, SM	M10H, N20, N33F
<b>Switch with pilot lamp</b> lamp red, 230V lamp red, 400V lamp green, 230V lamp green, 400V	+SLR/230 +SLR/400 +SLG/230 +SLG/400	E P UP	all M10, N20, N33F, N40, N61 M10, N20
<b>Gold plated contacts</b> For electronic circuits with low voltages and currents.	+GK	all	M10H, M20, N20, N33F
<b>Tropical proof type</b>	+TR	all	all
<b>Neon safety switch</b> For all-pole switching off of neon advertisement circuits by the Fire Brigade. Dimensions see page 274	+FEU	E	N20, N33F



## Accessories

A number of special versions can be supplied for adaptation of switches to various conditions of use.  
**Dimensions** see page 273

**Ordering example:** Cam switch N20 E A3 with terminal cover plate  
 Order type: **N20 E A3 +KLAD**

Description	Ordering Code	Suitable for designs	Suitable for switch type
<b>Terminal cover plate</b> Prevents accidental touching of live terminals (requirement for main switches according to VDE 0113) only for 2 cells for all cells	+KLAD	E, V	N20, N40, N61, N80 N100, N200
	+KLAD	E, V	N33F
<b>Moisture proofing caps</b> Protection class from rear: IP54. For protection of the switch from dust and moisture (e.g. when installed in machine pedestals). For switch mounting from the front and rear. Conical cable entry glands. Maximum number of cells: M10H 7 N20 5 N40 4 N61 2	+FR	E	M10H, N20, N40, N61
<b>Angled terminals</b> For easy connection of inaccessible switches. Unless otherwise stated, all terminals specified with markings are equipped in this manner. A distinction is drawn between left and right angled terminals. Seen from the switch end, the left terminals are located above left and below right; conversely, right terminals are above right and below left.	+WK	E,V N100	M20, N20, N40, N61, N80,
<b>Fast-on connectors</b> For 6,3 x 0,8mm plugs.	+AMPZ	E, V	M20, N20
<b>Earth terminals</b> 2 terminals, connected with one another, insulated from switch column: for earth conductors.	+PE	E, V, P, PF PF G, GF	all M10, N20, N33F, N40, N61 N80, N100, N200 N20
<b>Additional rectangular escutcheon plate 1 line</b> Dimensions see page 267	SRE	E, Z, V, SM	all
<b>Big additional rectangular escutcheon plate for 2 lines</b> Dimensions see page 267	SRE2	E, V	M10H, M20, N20, N33F
<b>Spare key</b> for key operated switches with Lock Willenhal FT101	J7101	E, V, P SMA	M10H, M20, N20, N33F, N40 M10H, M20
<b>Spare key</b> for key operated switches with Lock Ronis R455	B4-R455	Z, ZO	M10H, M20
<b>Wrench</b> for switches with central fixing	J7049	Z, ZO	M10H, M20

## Switching Programs according to Customer Requirements

As a result of their modular construction, TELUX cam switches are particularly suitable for manufacturing of special variants. According to its function, each pair of contacts in the switch is adapted to the desired program by appropriate design of the cam plate. In the case of switches with an overall switching angle of more than 180°, provision must be made for a cam plate in each switching cell, controlling two opposite, independent contact pairs with matching programs (does not apply to M10, M10H, M20 and N20).

Depending on the desired contact program for the special switch, it may often be impossible to make full use of all switching cells, that is, to include the maximum possible number of contacts. In determining the number of cells or switch length, one-contact cells will sometimes be resorted to.

Switch sizes M10, M10H, M20 and N20 are exceptions to this rule. Here, two cam plates can be built into each cell, so that both contacts are independently controlled (full use of the cells with special programs).

In all special switches with overall switching angles of less than 180°, the number of cells required is calculated by having the total number of contacts in the switching program.

When planning for switches with special programs, choice of the optimum switching angle thus plays an important part. The listing of all the options for lay-out of switch settings, on pages 247 and 248, should be an aid to planning (position numbers PN).

If special markings are to be engraved on the escutcheon plates, it is vital to take account of the available space. It is advisable to use abbreviations.

We provide forms (see page 275) on request, free of charge, to give a clear overview when special programs are being defined. Switch size, design, type of operating knob and desired switching angle, as well as the function of the contacts, are entered on these forms. Provision has also been made in them for entry of details as to escutcheon plate engravings or other special requirements.

## Ordering Example

Order sheet D399E		Cam switches with special switching program <b>Benedict GmbH</b>		Customer:	
<b>Switch Type</b>					
M4H					
M10					
<b>M10H</b>	<b>X</b>				
M20					
N20					
N33F	L100				
N40	L160				
N61	L400				
N80	L600				
N100	L800				
N200	L1200				
<b>Design</b>					
Panel mounting	E				
Central fixing	Z				
ZO	<b>X</b>				
Base mounting	V				
Snap-on mount.	SM				
SMA					
Plastic enclosure	P				
IP65	PF				
Cast enclosure	G				
IP65	GF				
<b>X</b>					
<b>Optional extras</b>					
Circular switch					
Key removable	<b>X</b>				
<b>Explanations:</b>		<b>Handles</b>		<b>Handle colour</b>	
Contact closed over several positions		Twist knob R (standard)		black (standard)	<b>X</b>
Spring return from pos.		Instrument knob G (standard M4H)	<b>X</b>	red	
		Toggle knob K (standard SMA)		grey (standard SMA)	
		Pointer knob Z		white	
		Ball type handle B		cream-coloured	
		Lever handle H		yellow	
		Hand wheel HR		blue	
<b>PUMP 2</b>		<b>Connect.</b>		<b>Terminals</b>	
		Terminals			
		Connect.			
<b>Marking for switch position</b>					
OFF		Degree	270		
1			0		
			45		
2			90	<b>X</b>	
START			120	<b>X</b>	

Order sheet A4 see page 275

## Utilization Categories

For easier choice of devices and in order to make the comparison of different products simpler are utilization categories for cam switches according to IEC 947-3, VDE 0660 Part 107 and

auxiliary contacts according to IEC 947-5-1 and VDE 0660 Part 200 determined. The Table below offers diverse utilization categories and associated test conditions.

Kind of current	Category		Typical applications	Rated operational current	Test conditions for the number of on-load operating cycles (normal service)						Test conditions for making and breaking capacities (operation in fault case)								
	frequent operation	infrequent operation			Make I/I <sub>e</sub>	U/U <sub>e</sub>	cosφ	Break I <sub>c</sub> /I <sub>e</sub>	U <sub>r</sub> /U <sub>e</sub>	cosφ	Make I/I <sub>e</sub>	U/U <sub>e</sub>	cosφ	Break I <sub>c</sub> /I <sub>e</sub>	U <sub>r</sub> /U <sub>e</sub>	cosφ			
Alternating Current	AC20A	AC20B	No-load conditions	all values	-	-	-	-	-	-	-	-	-	-	-	-			
	AC21A	AC21B	Switching of resistive loads including moderate overloads	all values	1	1	0,95	1	1	0,95	1,5	1,05	0,95	1,5	1,05	0,95			
	AC22A	AC22B	Switching of mixed resistive and inductive loads including moderate overloads	all values	1	1	0,8	1	1	0,8	3	1,05	0,65	3	1,05	0,65			
	AC23A	AC23B	Switching of motor loads or other highly inductive loads	0 < I <sub>e</sub> ≤ 100A all values 100A < I <sub>e</sub>	1	1	0,65	1	1	0,65	10	1,05	0,45	8	1,05	0,45			
	AC2		Slip-ring motors: Starting, plugging	all values	2,5	1	0,65	2,5	1	0,65	4	1,05	0,65	4	1,05	0,65			
	AC3		Squirrel-cage motors: Starting, switching off motors during running	0 < I <sub>e</sub> ≤ 100A all values 100A < I <sub>e</sub>	I <sub>e</sub> ≤ 17A 6 I <sub>e</sub> > 17A 1	0,65 0,35		I <sub>e</sub> ≤ 17A 1 I <sub>e</sub> > 17A 0,35	0,65 0,35		10	1,05	0,45 0,35	8	1,05	0,45 0,35			
	AC4		Squirrel-cage motors: Starting, plugging, inching	0 < I <sub>e</sub> ≤ 100A all values 100A < I <sub>e</sub>	I <sub>e</sub> ≤ 17A 6 I <sub>e</sub> > 17A 1	0,65 0,35		I <sub>e</sub> ≤ 17A 6 I <sub>e</sub> > 17A 0,35	0,65 0,35		12	1,05	0,45 0,35	10	1,05	0,45 0,35			
	AC15		Control of electromagnetic loads (> 72VA)	-	10	1	0,7	1	1	0,4	10	1,1	0,3	10	1,1	0,3			
								I/I <sub>e</sub>	U/U <sub>e</sub>	L/R <sup>1)</sup>	I <sub>c</sub> /I <sub>e</sub>	U <sub>r</sub> /U <sub>e</sub>	L/R <sup>1)</sup>	I/I <sub>e</sub>	U/U <sub>e</sub>	L/R <sup>1)</sup>	I <sub>c</sub> /I <sub>e</sub>	U <sub>r</sub> /U <sub>e</sub>	L/R <sup>1)</sup>
Direct current	DC20A	DC20B	No-load conditions	all values	-	-	-	-	-	-	-	-	-	-	-	-			
	DC21A	DC21B	Switching of resistive loads including moderate overloads	all values	1	1	1	1	1	1	1,5	1,05	1	1,5	1,05	1			
	DC22A	DC22B	Switching of mixed resistive a. induct. loads incl. moderate overloads (shunt motors)	all values	1	1	2	1	1	2	4	1,05	2,5	4	1,05	2,5			
	DC23A	DC23B	Switching of highly inductive loads (e.g. series motors)	all values	1	1	7,5	1	1	7,5	4	1,05	15	4	1,05	15			
	DC3		Shunt-motors: Starting, plugging, inching	all values	2,5	1	2	2,5	1	2	4	1,05	2,5	4	1,05	2,5			
	DC5		Series-motors: Starting, plugging, inching	all values	2,5	1	7,5	2,5	1	7,5	4	1,05	15	4	1,05	15			

U<sub>e</sub> Rated operational voltage, U Voltage before make, U<sub>r</sub> Recovery voltage, I<sub>e</sub> Rated operational current, I Current made, I<sub>c</sub> Current broken

1) Time in milliseconds (ms)

### Note:

By plugging, is understood stopping or reversing the motor rapidly by reversing motor primary connections while the motor is running.

By inching (jogging), is understood energizing a motor once or repeatedly for short periods to obtain small movements of the driven mechanism.

## Technical Data

Data according to IEC 947-3, IEC 947-5-1, VDE 0660, EN 60947-3, EN 60947-5-1

Type	M10 P	M10H	M10HD	M20	N20	N33F	N40	N61	N80	N100	N200
Rated therm. current $I_{th}$ open A	20	20	10	32	32	50	63	90	115	150	250
Rated therm. current $I_{the}$ encl. A	20	20	10	32	32	50	63	90	115	150	250
Rated operational voltage $U_e$ V	440	690 <sup>1)</sup>									
Disconnection property <sup>2)</sup> acc. to VDE, IEC up to V	440	440	440	440	440	440	690	440	440	690	690
<b>Breaking capacity <math>I_{eff}</math></b>											
3 x 220-440V A	160	160	-	220	220	260	380	520	740	900	1100
3 x 500V A	-	100	-	160	160	200	290	380	560	680	850
3 x 660-690V A	-	80	-	120	120	150	200	290	520	450	-
<b>Utilization categ. AC21A, AC21B</b>											
Switching of resistive loads including moderate overloads											
Rated operational current $I_e$ A	20	20	10	32	32	50	63	90	115	150	250
<b>Utilization categ. AC23A, AC23B</b>											
Switching of motor loads or other highly inductive loads											
Rated current $I_e$ 400V A	16	16	-	30	30	45	45	60	85	105	135
Power rating 220-240V kW	4	4	-	7,5	7,5	11	15	22	30	40	40
3-phase 3-pole 380-440V kW	7,5	7,5	-	15	15	22	22	30	45	55	70
500V kW	-	7,5	-	15	15	22	22	30	45	55	70
660-690V kW	-	7,5	-	15	15	22	18,5	30	45	45	-
<b>Star-Delta-Switches</b>											
for squirrel cage motors											
Power rating											
3-phase 3-pole 220-240V kW	3,7	3,7	-	7,5	7,5	8	11	15	18,5	37	40
380-415V kW	7,5	7,5	-	15	15	18,5	25	30	30	40	70
<b>Utilization category AC3</b>											
Switching of three-phase motors											
Rated current $I_e$ 400V A	12	12	-	22	22	30	30	50	60	80	135
Power rating 220-240V kW	3	3	-	5,5	5,5	7,5	7,5	15	18,5	37	40
3-phase 3-pole 380-440V kW	5,5	5,5	-	11	11	15	15	25	30	40	70
500V kW	-	5,5	-	11	11	15	15	25	30	40	70
660-690V kW	-	5,5	-	11	11	15	15	25	30	40	-
<b>Utilization category AC4</b>											
squirrel cage motors, inching											
Power rating 220-240V kW	0,55	0,55	-	2,2	2,2	3,7	4	5,5	6	11	18,5
3-phase 3-pole 380-440V kW	1,5	1,5	-	4	4	5,5	7,5	11	15	18,5	35
500V kW	-	1,5	-	4	4	5,5	7,5	11	15	22	35
660-690V kW	-	1,5	-	4	4	5,5	7,5	11	15	22	-
<b>Utilization category AC15</b>											
Control of electromagnetic loads, contactors,											
Rated current $I_e$											
up to 240V A	6	6	2,5	12	12	16	-	-	-	-	-
380 - 440V A	4	4	1,5	6	6	7	-	-	-	-	-
500V A	-	5	-	8	8	10	-	-	-	-	-
<b>Utilization categ. DC21A, DC21B</b>											
Switching of resistive loads											
Time constant $L/R \leq 1\text{ms}$											
Rated current $I_e$											
1-pole 30V A	20	20	10	32	32	40	63	80	100	150	250
60V A	4	4	-	6	6	20	30	30	30	-	-
110V A	0,6	0,6	-	3	3	4	6	6	6	-	-
220V A	0,5	0,5	-	0,8	0,8	0,8	1,3	1,3	1,3	2,5	2,5
440V A	-	-	-	0,4	0,4	0,4	0,6	0,6	0,6	0,7	0,7
<b>Utilization category DC3 - DC5</b>											
Switching of shunt motors and series motors											
Time constant $L/R \leq 15\text{ms}$											
Rated current $I_e$											
1-pole 30V A	8	8	-	13	13	16	25	32	40	60	100
60V A	1	1	-	2,4	2,4	4	12	12	12	-	-
110V A	0,3	0,3	-	0,5	0,5	1,6	2,4	2,4	2,4	-	-
Protection class of terminals <sup>1)</sup>	IP00	IP20	IP20	IP00	IP00	IP20	IP00	IP00	IP00	IP00	IP00

1) suitable for: earthed-neutral systems, overvoltage category I to III, pollution degree 3 (standard-industry):  $U_{imp} = 6\text{kV}$ . Data for other conditions on request

2) valid for lines with grounded common neutral termination, overvoltage category III, pollution degree 3.

3) Protection degree of the terminals with connected insulated conductor. Additional protection with terminal cover (KLAD).

## Technical Data

Data according to IEC 947-3, IEC 947-5-1, VDE 0660, EN 60947-3, EN 60947-5-1

Type	M10 P	M10H	M10HD	M20	N20	N33F	N40	N61	N80	N100	N200
<b>Cable cross-sections</b>											
solid mm <sup>2</sup>	1-2,5	1-2,5 <sup>1)</sup>	1,5-6	1,5-6	1,5-6	2,5-10	2,5-16 <sup>1)</sup>	6-25 <sup>1)</sup>	6-35	10-50 <sup>1)</sup>	50-150
flexible mm <sup>2</sup>	0,75-2,5	0,75-2,5 <sup>1)</sup>	1-4	1-4	1-4	1,5- 6	2,5-10 <sup>1)</sup>	6-25 <sup>1)</sup>	6-35	10-35 <sup>1)</sup>	35-120
flexible w. multicore cable end mm <sup>2</sup>	0,75-2,5	0,75-1,5	1-4	1-4	1-4	1,5- 6	2,5-6	6-16	6-35	10-25	-
Conductors to clamp per pole	2	2	2	2	2	2	2	1	1	1	1
Size of terminal screw	M3	M3,5	M4	M4	M4	M4	M5	2xM5	2xM5	2xM6	M10
Tightening torque Nm lb.inch	0,6-1,2 5-11	0,8-1,4 7-12	1,2-1,8 11-16	1,2-1,8 11-16	1,2-1,8 11-16	1,2-1,8 11-16	2,5-3 22-26	2,5-3 22-26	2,5-3 22-26	3,5-4,5 31-40	10 88
<b>Short circuit protection</b>											
Max. fuse size gL (gG) A	20	20	20	35	35	50	63	100	125	160	250
Rated short-time withstand current (1sec. current) A	250	250	-	400	400	500	800	1000	1400	1800	3000
Rated conditional short-circuit current kA <sub>eff</sub>	10	10	1	10	10	10	10	10	10	10	10
<b>Short-time capacity</b>											
Load duration 3s A	100	100	-	200	200	350	400	600	720	1000	2000
10s A	60	60	-	130	130	230	250	400	480	600	1200
Note: Ratings applies to contacts already closed 30s A	35	35	-	85	85	110	160	250	300	500	600
60s A	25	25	-	65	65	80	110	200	250	370	480
<b>Power loss at AC21A</b> A per pole W	20 0,6	20 0,5	10 0,5	32 0,9	32 1,1	50 1,9	63 2	85 2,8	115 4,4	150 5,7	250 21
<b>Switching of capacitive loads</b> maximum making capacity up to 500V A	140	140	-	300	300	350	400	600	700	900	1800

Data according to UL and cUL

Type	M10 P	M10H	M10HD	M20	N20	N33F	N61	N80	N100	N200	L400
Rated voltage V~	300	600	600	600	600	600	600	600	600	600	600
Rated operational current "General Use" with jumper A A	20 15	20 -	10 -	35 25	35 25	60 40	90 60	115 80	130 -	250 -	350 -
DOL-Rating 3-phase	110-120V 200-208V 220-240V  440-480V 550-600V	hp hp hp  hp hp	1½ 2 3  - 7½	1½ 2 3  5 - 15	- 5 5  10 15	5 5 5  10 15	7½ 10 15  25 30	- - -  - 40	10 15 20  40 50	15 25 30  40 50	15 25 30  60 75
DOL-Rating 1-phase	110-120V 200-208V 220-240V	hp hp hp	½ 1 1½  ½ 1 1½	½ 1 1½  - - -	- 3 5  11½ 3 5	1½ 3 5  11½ 5 7½	3 5 7½  - - -	- 5 10  200	5 7½ 10  200	7½ 15 15  300	7½ 15 20  350
Fuse size (RK5) Manual Motor Controller 5kA / 600V and Motor Disconnect A	40 <sup>2)</sup>	40	-	80	80	150	-	200	300	350	350
Heavy pilot duty AC	A300	A600	A600	A600	A600	A600	-	-	-	-	-
<b>Cable cross sections</b>											
solid AWG	12 - 20	12 - 20	10 - 18	10 - 18	10 - 18	10 - 12	10 - 12	10 - 12	10 - 14	-	-
flexible AWG	14 - 20	14 - 20	8 - 18	8 - 18	8 - 18	6 - 12	2 - 12	2 - 12	1 - 14	250kcmil	500kcmil
Tightening torque Nm lb.inch	1.7 15	1-1.7 9-15	1.7-2.8 15-25	1.7-2.8 15-25	1.7-2.8 15-25	2.3-2.8 20-25	2.8 25	2.8 25	4.5 40	-	-

1) Maximum cable cross-section with prepared conductor

2) 5kA / 300V

## Technical Data

Data according to IEC 947-3, IEC 947-5-1, VDE 0660, EN 60947-3, EN 60947-5-1

Type		L100	L160	L400	L600	L800	L1200
Rated insulation voltage $U_i$	V	690 <sup>2)</sup>	690 <sup>2)</sup>	690 <sup>2)</sup>	690 <sup>2)</sup>	690 <sup>2)</sup>	690 <sup>2)</sup>
Rated thermal current $I_{th}$ openA	125	180	400	600	800	1200	
Rated thermal current $I_{the}$ encl. A	125	180	400	600	800	1200	
with conductor	mm <sup>2</sup>	50	70	40x5	40x10	busbar 2x40x10	busbar 2x50x10
<b>Utilization category AC21A, AC21B</b>							
Switching of resistive loads, including moderate overloads							
Rated operational current $I_e$	A	125	180	400	400	400	400
<b>Shot-time current-carrying capacity</b>							
Load duration							
1s	-	-	4800	6500	8500	10000	
3s	800	1200	3600	5000	6500	8000	
10s	500	800	2000	3200	4000	5800	
Note: Ratings applies to contacts already closed	30s	320	480	1200	1700	2200	3200
	60s	180	380	960	1300	1700	2300
<b>Cable cross-sections</b>							
solid or stranded	mm <sup>2</sup>	25-50 <sup>1)</sup>	cable lug	busbar	busbar	busbar	busbar
flexible	mm <sup>2</sup>	25-50 <sup>1)</sup>	70	40x5	40x10	2x40x10	2x50x10
flexible with multicore cable end	mm <sup>2</sup>	25-35	-	-	-	-	-
Size of terminal screw		2xM5	M8	M12	M16	M16	M16
Number of conductors to clamp per pole		1	1	1	2	1	1
<b>Short circuit protection</b>							
Max. fuse size	slow, gL (gG) A	125	200	400	630	800	1250

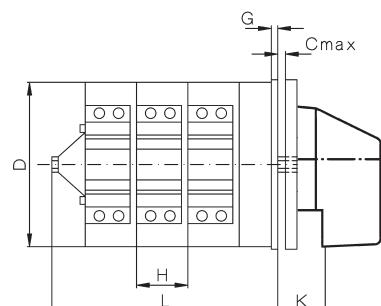
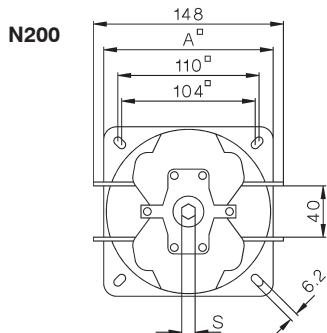
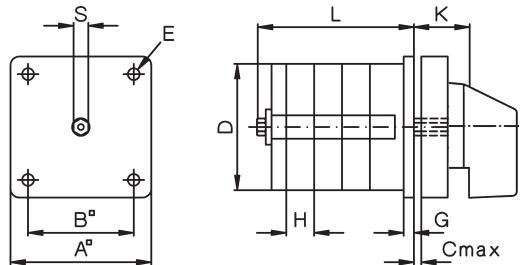
1) Maximum cable cross-section with prepared conductor

2) suitable for: earthed-neutral systems, overvoltage category I to III, pollution degree 3 (standard-industry):  $U_{imp} = 6kV$ . Data for other conditions on request

## Dimensions (mm)


### Panel mounting E

M10 - N100




Type	A	B	C	D	D1	D2	D3	E	G	H	Ks	
M10H	48	36	5	44 <sup>1)</sup>	5	8	-	4	3,5	9,5	SW5	1) 44,5 x 42
M20	48	36	5	56	5	8	57	4	3,5	12,5	SW5	
N20	64	48	5	56	5	12	57	4,2	3	12,5	SW7	
N33F	64	48	5	58 <sup>2)</sup>	5	12	-	4,2	3	15,5	SW7	
N40	86	68	7	80	6	12	82	5,2	3,5	18	SW9	
N61	86	68	7	80	6	12	82	5,2	3,5	29,5	SW9	
N80	86	68	7	80	6	12	82	5,2	3,5	29,5	SW9	
N100	132	110	9	128	7	16	129	6,2	5	30	SW12	
N200	132	110	9	128	7	16	-	6,2	5	40	SW12	

Mounting holes: built in from ear  
Mounting screw: J3631N M=1,2-1,4 Nm




Type	Dimension L with .. cells														
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
M10H	36,5	46	55,5	65	74,5	84	93,5	103	112,5	122	131,5	141	-	-	-
M20	38,5	51	63,5	76	88,5	101	113,5	126	138,5	151	163,5	176	-	-	-
N20	40,5	53	65,5	78	90,5	103	115,5	128	140,5	153	165,5	178	190,5	203	215,5
N33F	44	59,5	75	90,5	106	121,5	137	152,5	168	183,5	199	214,5	230	245,5	261
N40	52,5	70,5	88,5	106,5	124,5	142,5	160,5	178,5	196,5	214,5	232,5	250,5	268,5	286,5	304,5
N61	64	93,5	123	152,5	182	211,5	241	270,5	300	329,5	359	388,5	-	-	-
N80	64	93,5	123	152,5	182	211,5	241	270,5	300	329,5	359	388,5	-	-	-
N100	88	118	148	178	208	238	268	298	328	358	388	418	-	-	-
N200	96	136	176	216	256	296	336	376	416	456	496	536	-	-	-


Mounting holes: built in from front




### Central fixing Z M10H, M20, N33F

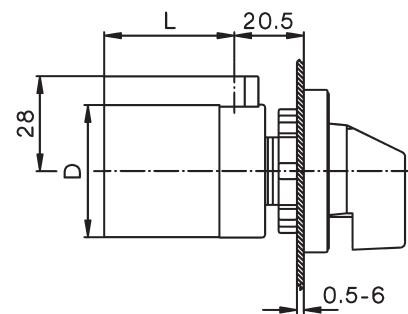

### Central fixing without escutcheon plate ZO M10H, M20

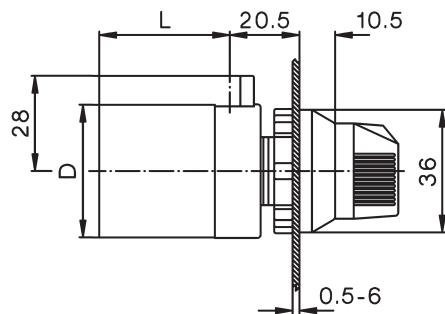


Mounting hole:




Further dimensions see tables above

## Mini-Cam Switches M4H

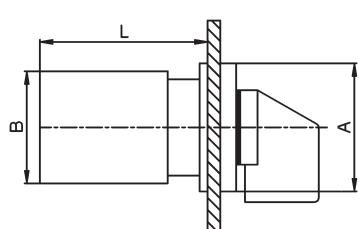
### Panel mounting E




### Central fixing Z, ZO

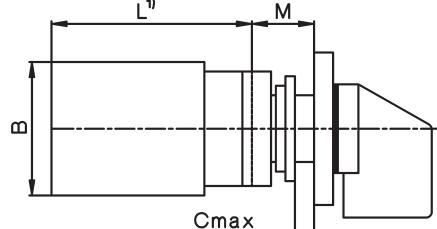

ZO



Z




Typ	A	B	D	M	Dimension L with .. cells							
					1	2	3	4	5	6	7	8
M4H	30	28	29,5	12,5	\$38,5	50,5	62,5	74,5	86,5	98,5	110,5	122,5


Mounting holes see page 236

# Telux - Cam Switches

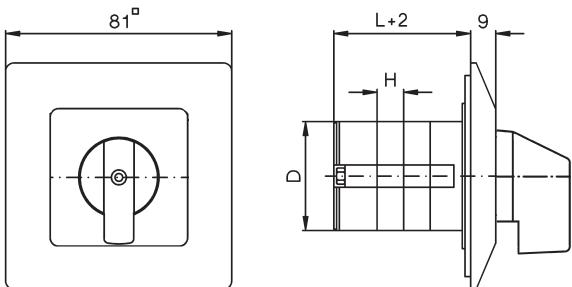
## Flush mounting UP M10



## Base mounting V M10H - N100

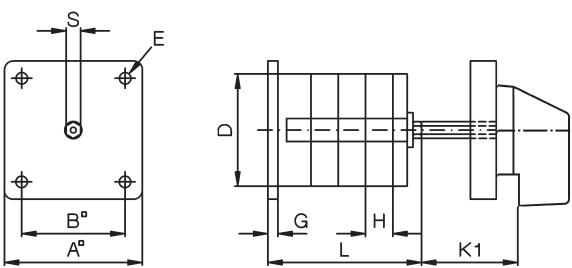


N200

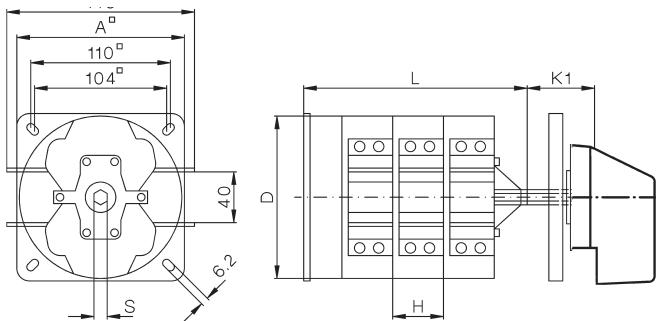

Type	A	B	D	D1	D2	E	G	H	I	K	K1	
M10	48	36	39	5	8	4	3,5	9,5	6	19	41	SW5
M10H	48	36	44 <sup>1)</sup>	5	8	4,2	3	9,5	6	19	41	SW5
M20	48	36	56	5	8	4,2	3	12,5	6	19	47	SW5
N20	64	48	56	5	12	4,2	3	12,5	0	20	29	SW7
N33F	64	48	58 <sup>2)</sup>	5	12	4,2	3	15,5	0	20	31,5	SW7
N40	86	68	80	6	12	5,2	3,5	18	-	-	38,5	SW9
N61	86	68	80	6	12	5,2	3,5	29,5	-	-	49,5	SW9
N80	86	68	80	6	12	5,2	3,5	29,5	-	-	49,5	SW9
N100	132	110	128	7	16	6,2	5	30	-	-	79,5	SW12
N200	132	110	128	7	16	6,2	5	40	-	-	104	SW12

Mounting holes: for escutcheon plate




Type	Dimensions L with .. cells														
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
M10	34,5	44	53,5	63	72,5	82	91,5	101	110,5	120	129,5	139	-	-	-
M10H	36,5	46	55,5	65	74,5	84	93,5	103	112,5	122	131,5	141	-	-	-
M20	38,5	51	63,5	76	88,5	101	113,5	126	138,5	151	163,5	176	-	-	-
N20	40,5	53	65,5	78	90,5	103	115,5	128	140,5	153	165,5	178	190,5	203	215,5
N33F	44	59,5	75	90,5	106	121,5	137	152,5	168	183,5	199	214,5	230	245,5	261
N40	52,5	70,5	88,5	106,5	124,5	142,5	160,5	178,5	196,5	214,5	232,5	250,5	268,5	286,5	304,5
N61	64	93,5	123	152,5	182	211,5	241	270,5	300	329,5	359	388,5	-	-	-
N80	64	93,5	123	152,5	182	211,5	241	270,5	300	329,5	359	388,5	-	-	-
N100	88	118	148	178	208	238	268	298	328	358	388	418	-	-	-
N200	96	136	176	216	256	296	336	376	416	456	496	536	-	-	-

## Snap-on mounting SM

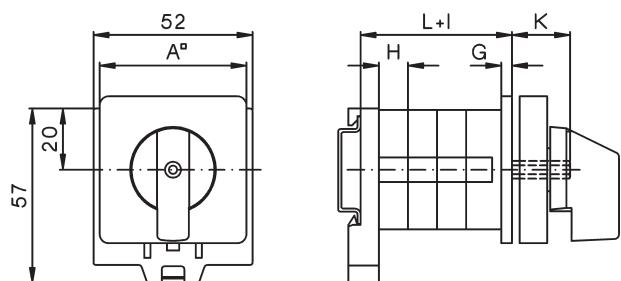M10H - N33F for 35mm DIN-rail mounting according to DIN EN 50022


Dimensions see tables above



## Switch with installation cover SMA


M10H, M20 for 35mm DIN-rail mounting according to DIN EN 50022

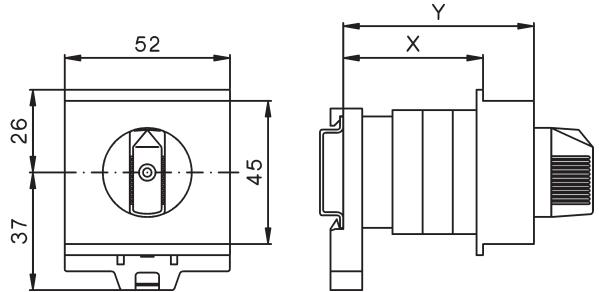Type	Dimension X with .. cells					Dimension Y with .. cells				
	1, 2	3	4	5		1, 2	3	4	5	
M10H	44	44	61	76	76	60	60	75	90	
M20						60	75	90		




**Plastic enclosed switches P, PF**

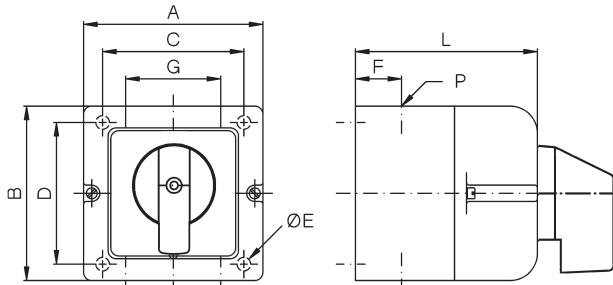M10 - N61




N61, N80

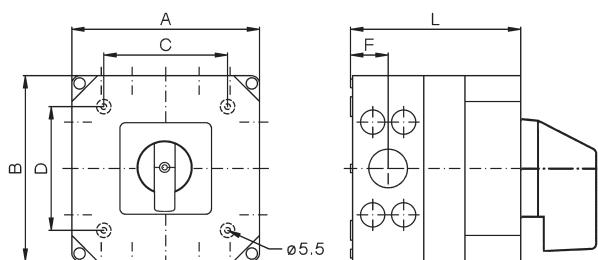

Type	A	B	C	D	E	F	G	P	Dimension L with .. cells					
									1	2	3	4	5	6
M10	66	64	50	36	5	15,5	26	M20	43	52	62	71	81	90
N20 N33F	82	78	57	53	4,5	17	29	M20	66	66	80	94	108	122
	112	108	85	50	5	20	50	M25	92	92	92	110	128	146
N40	112	108	85	50	5	20	50	M25	92	92	110	128	146	164
N61	112	108	85	50	5	20	50	M25	92	110	-	-	-	-
N61	182	180	120	120	5,5	36,5	-	1)	-	165	215	215	-	-
N80	182	180	120	120	5,5	36,5	-	1)	110	110	165	215	215	-
N100	210	310	165	255	6,5	52,5	-	2)	130	130	180	-	-	-
N200	310	310	255	255	6,5	52,5	-	3)	130	180	230	-	-	-

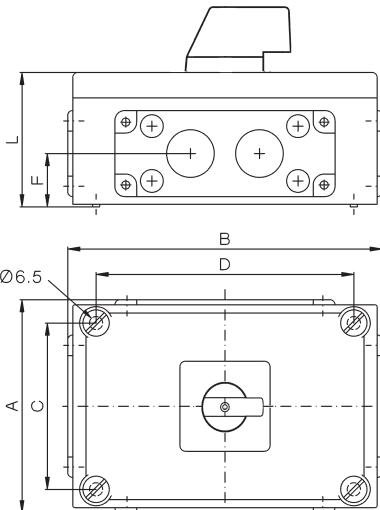N100, N200




1) knock outs for M40/M32 + 4x M20 at top and bottom  
M32/M25 + 4x M20 at the right and left hand side,

2) 2 flange plates with hole 50,5 at top and bottom


3) 2 flange plates with hole 50,5 at top and bottom, can also be mounted at the right and left hand side

**Motor terminal box mounting KE**

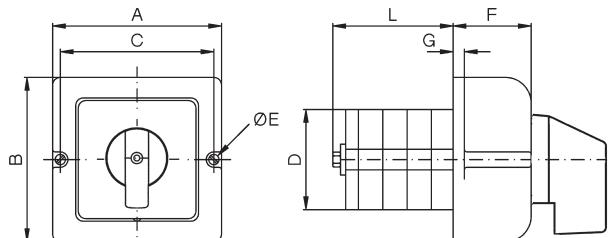M10 - N33F



**Mounting holes**


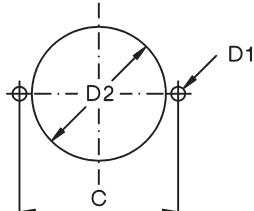


Type	A	B	C	D	D1	D2	E	F	G	Dimension L with .. cells					
										2	3	4	5	6	
M10	66	64	58	39	4	48	3,2	24	6	22	31,5	41	50,5	60	
N20 N33F	82	78	71	48	5	57	4,2	34	5	24,5	37	49,5	62	74,5	
	112	108	100	56	5	70	4,2	49	11	32,5	48	63,5	79	94,5	

**Plastic enclosed motor starter PM**

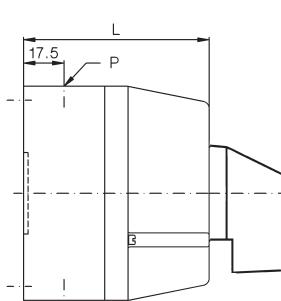
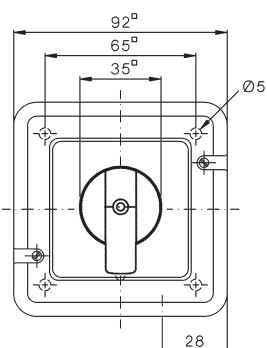
N20

Typ	P	Dimension L with .. cells					
		1	2	3	4	5	6
N20	M25	80	80	80	92,5	105	117,5






# Telux - Cam Switches

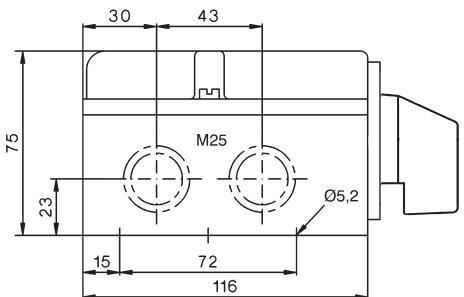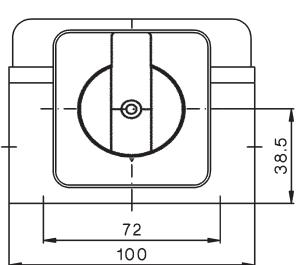Cast aluminium enclosed switches G, GF  
N20



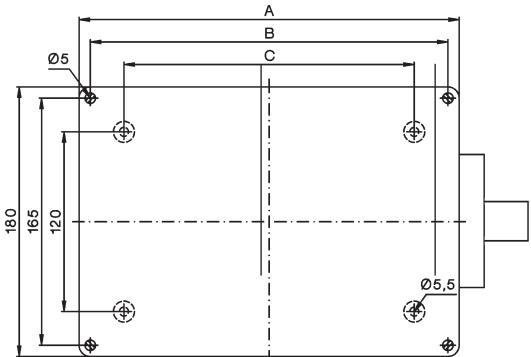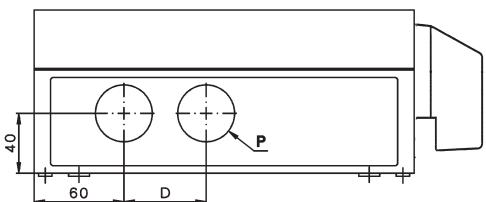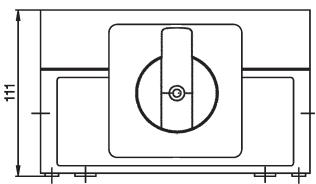**Plastic enclosure horizontal PLF (Replacement for cast aluminium enclosure G, GF)**  
**N40, N61, N80**






Type	N40 1 - 6 cells	N40 7 - 10 cells
A	182	254
B	167	239
C	120	190
D	-	65
P	2 x Ø40,5 (M40)	4 x Ø40,5 (M40)

## Load Switches

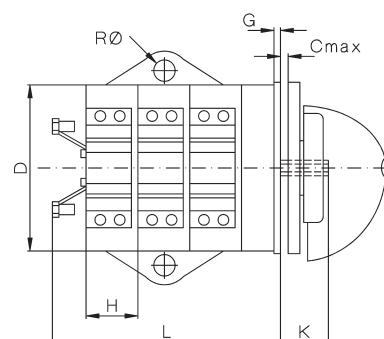
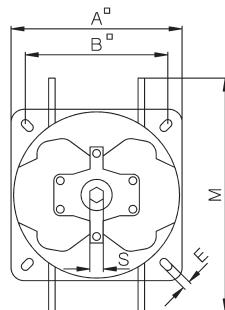
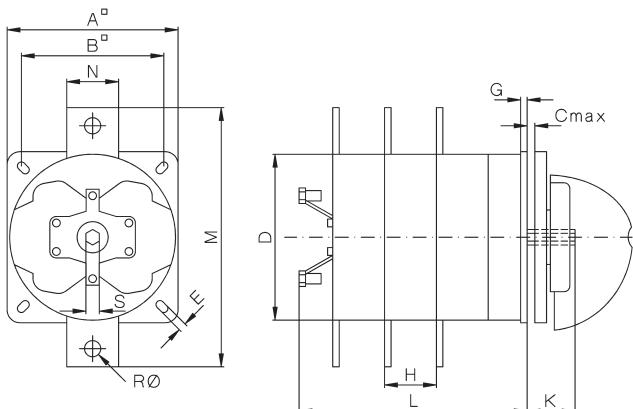
**Panel mounting E**  
L100 - 400, L800, L1200

L600




**Base mounting V**  
L100 - 400, L800, L1200

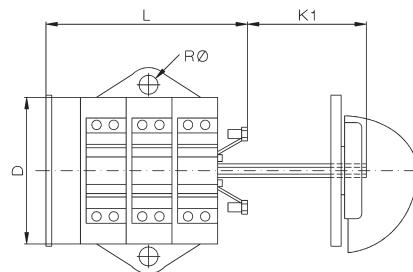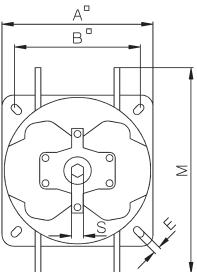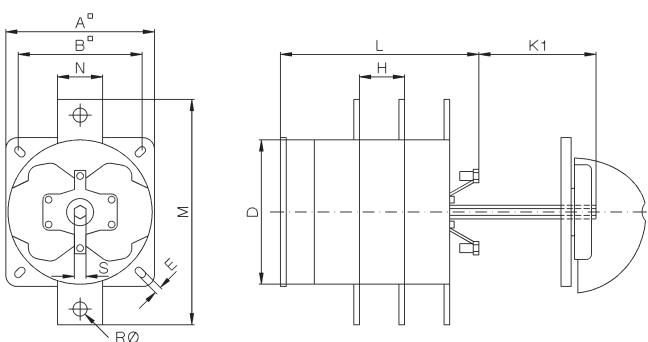L600



Type	A	B	C	D	D1	D2	E	G	H	K	K1	M	N	R	S
L100	86	68	7	80	6	12	5,2	3,5	18	24,5	38,5	103	27	-	SW9
L160	86	68	7	80	6	12	5,2	3,5	29,5	24,5	38,5	115	-	8,5	SW9
L400	132	110	9	128	7	16	6,2	5	40	37	104	200	40	12,5	SW12
L600	132	110	9	128	7	16	6,2	5	40	37	104	180	-	16,5	SW12
L800	132	110	9	128	7	16	6,2	5	40	37	104	240	40	16,5	SW12
L1200	132	110	9	128	7	16	6,2	5	40	37	104	240	40	16,5	SW12


**Mounting holes:**



Type	Dimension L with .. cells											
	1	2	3	4	5	6	7	8	9	10	11	12
L100	52,5	70,5	88,5	106,5	124,5	142,5	160,5	178,5	196,5	214,5	232,5	250,5
L160	64	93,5	123	152,5	182	211,5	241	270,5	300	329,5	359	388,5
L400	96	136	176	216	256	296	336	376	416	456	496	536
L600	96	136	176	216	256	296	336	376	416	456	496	536
L800	96	136	176	216	256	296	336	376	416	456	496	536
L1200	96	136	176	216	256	296	336	376	416	456	496	536


## Operating Knobs and Handles

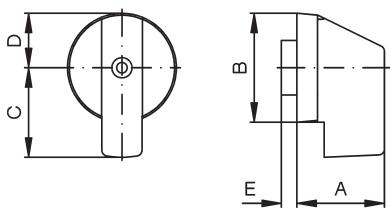Instrument knob G.




Type	A	B	C	D	E
M10, M10H, M20	23	28	24	14	4
N20, N33F	27	36	32	18	3
N40, N61, N80, L100, L160	36	47	42	24	3,5
N100, N200	48,10	75	63	37,5	-

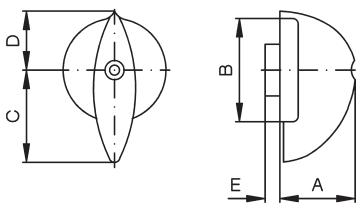Twist knob R.



Type	A	B	C	D	E
M10, M10H, M20	20,5	28	25	15	4
N20, N33F	24	36	29,5	19	3
N40, N61, N80, L100, L160	31	49	41	28	3,5
N100, N200, L400, L600, L800, L1200	50	75	62	41	2,5

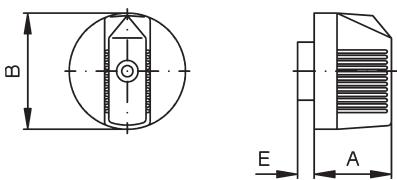
Toggle knob K.




Type	A	B	E
M10, M10H, M20	18,5	28	4
N20, N33F	24	36	3

Hand wheel HR

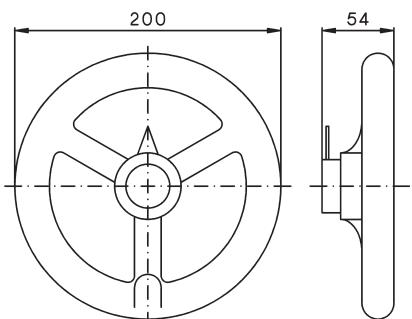N100, N200,  
L400, L600, L800, L1200



Ball type handle B.

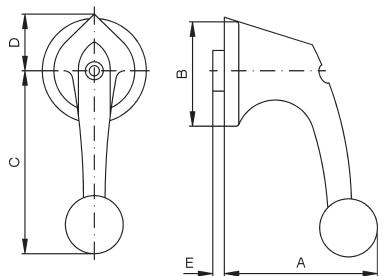


Type	A	B	C	D	E
N20, N33F	53	36,5	64	21	3
N40, N61, N80, L100, L160	62	49	82	31	3,5
N100, N200, L400, L600, L800, L1200	63	75	110	45	2,5

Code number for colour

grey	.1	white	.5
black	.2	blue	.6
red	.3	yellow	.7
cream-coloured	.4	euro-white	.8


## Escutcheon plates

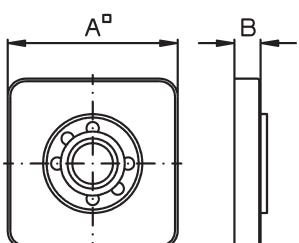Escutcheon plate



Type	A	B
M10, M10H, M20	48	7,5
N20, N33F	64	7,5
N40, N61, N80, L100, L160	88	8
N100, N200, L400, L600, L800, L1200	132	9

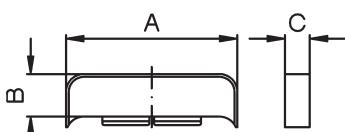Rectangular additional plate SRE




Type	A	B	C
M10, M10H, M20	48	12	7,5
N20, N33F	64	14	7,5
N40, N61, N80, L100, L160	88	22	8
N100, N200, L400, L600, L800, L1200	132	31	9

## Special drives


Removable knob drive STGR, STGR2

M10H - N33F


Type	B	C	D1	D2	D3
M10H, M20	36	5	5	12	18
N20, N33F	48	5	5	12	18



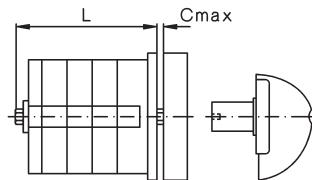Replace dimension D2 with dimension D3 for STGR2  
Dimension L see page 262




Mounting holes




## Door couplings

Dimension T is a minimum value. In case of order the dimension T is necessary.

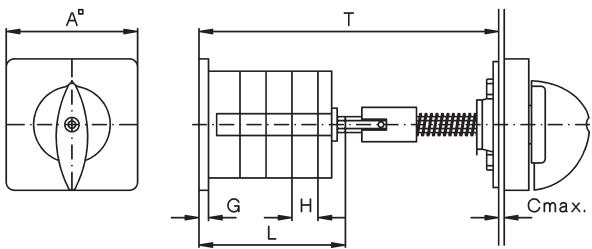
**Door coupling TK, TKFR  
N40 - L1200**



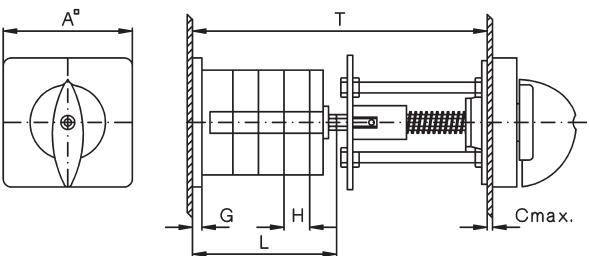
**Door coupling, lockable TK2, TK2FR  
N40 - L1200**



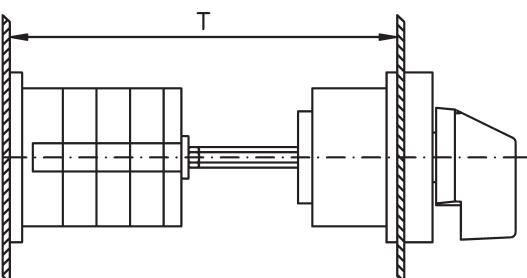
**Door coupling TKE, TK2E  
M10H, M20, N20, N33F**




**Mounting holes:  
TK, TKFR, TK2, TK2FR  
TKE, TK2E**



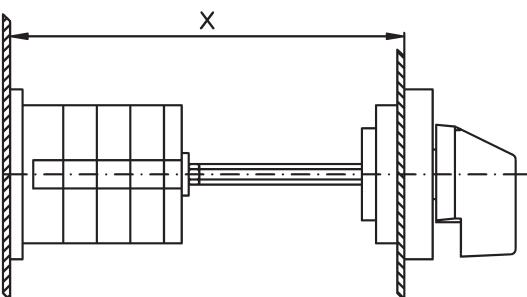**Door coupling, lockable TK2Z  
M10H, M20, N20, N33F**



**Mounting holes:  
TKZ**




Further dimensions see pages 262 and 263.

Dimension T is a minimum value dependent on switch Type and number of cells. For ordering dimension T is necessary

Type	A	B	C	D1	D2	Minimum dimension T with .. cells							
						1	2	3	4	5	6	7	8
M10H	48	36	5	5	8	108	117,5	127	136,5	146	155,5	165	174,5
M20	48	36	5	5	8	100	112,5	125	137,5	150	162,5	175	187,5
N20	64	48	5	5	10	100	112,5	125	137,5	150	162,5	175	187,5
N33F	64	48	5	5	10	103	118,5	134	149,5	165	180,5	196	211,5
N40	88	48	7	6	12	134	152	170	188	206	224	242	260
N61	88	48	7	6	12	145,5	175	245,5	234	263,5	293	322,5	352
N80	88	48	7	6	12	145,5	175	245,5	234	263,5	293	322,5	352
N100	132	110	9	7	15	202	232	262	292	322	352	382	412
N200	132	110	9	7	15	212	252	292	332	372	412	452	492
L100	88	48	7	6	12	152	-	188	-	224	-	260	-
L160	88	48	7	6	12	145,5	175	245,5	234	263,5	293	322,5	352
L400	132	110	9	7	15	212	252	292	332	372	412	452	492
L600	132	110	9	7	15	-	-	292	-	412	-	-	-
L800	132	110	9	7	15	-	252	-	332	-	412	452	492
L1200	132	110	9	7	15	-	-	292	-	412	-	-	-


### Key operated switches SA
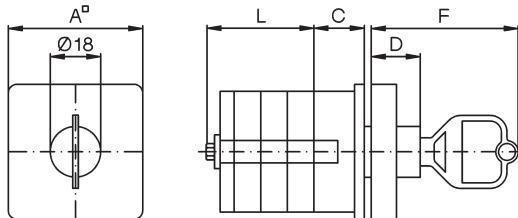
#### Panel mounting E M10 - N61




Type	A	B	C	D	D1	D2	F
M10H, M20	48	36	18	17,5	5	18,5	52,5
N20, N33F	64	48	10	17,5	5	18,5	52,5
N40, N61	88	68	23,5	15	6	18,5	50

#### Mounting holes

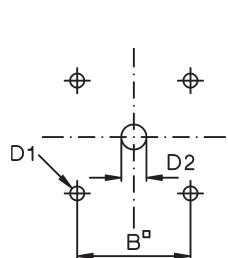

Dimension L see page 262


#### Base mounting V M10 - N61

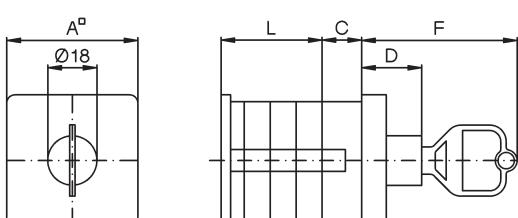


Type	A	C	D	F
M10H, M20	48	18	22	57
N20, N33F	64	8	22	57
N40, N61	88	15	15	50

Dimension L  
see page 263

#### Central fixing Z M10H Z ... + SA M20 Z ... + SA

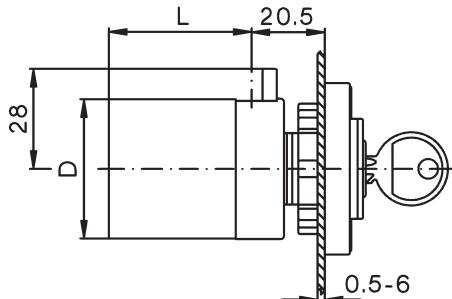


#### Central fixing without escutcheon plate ZO M10H ZO ... + SA M20 ZO ... + SA

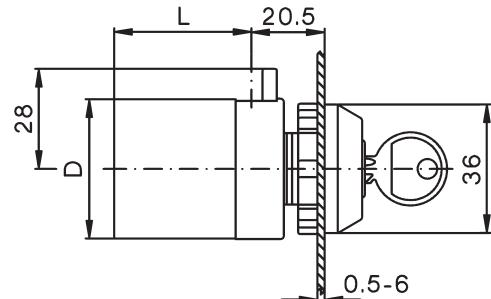

Mounting holes:


Further dimensions see page 262

#### DIN rail mounting SMA M10H, M20

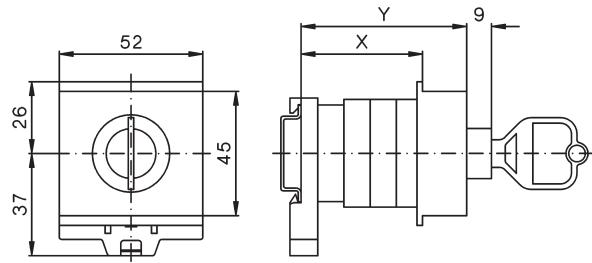

Type	Dimension X with .. cells				Dimension Y with .. cells			
	1	2	3	4	1	2	3	4
M10H	44	75	75	91	60	90	90	107
M20	59	75	75	91	75	90	90	107

#### Flush mounting UP M10


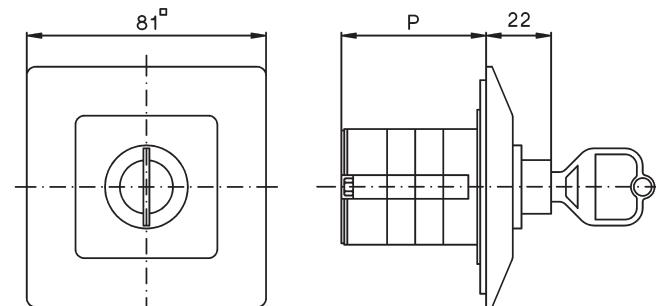


Type	Dimension P with .. cells	
	1	2
M10	47,5	57

#### Plastic enclosed switches P, PF M10, N20, N33F, N40, N61

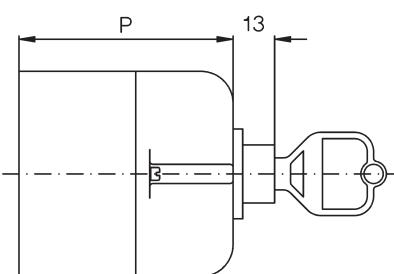
Type	Dimension P with .. cells			
	1	2	3	4
M10	62	71	81	90
N20	66	80	94	108
N33F	92	110	110	128
N40	92	110	-	-
N61	110	-	-	-

Further dimensions see page 264




## Key operated switches

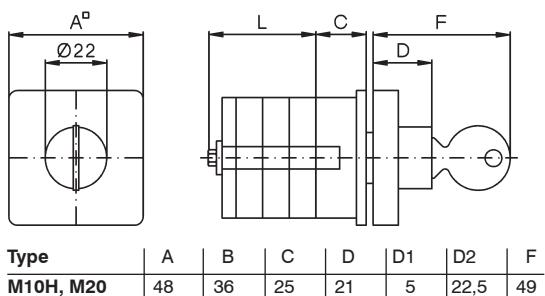**Key operated switch SAK**  
Panel mounting E M10H, M20




Mounting holes

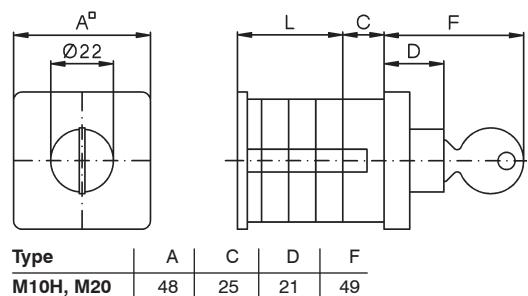
**Key operated switch SAK**  
Base mounting V M10H, M20



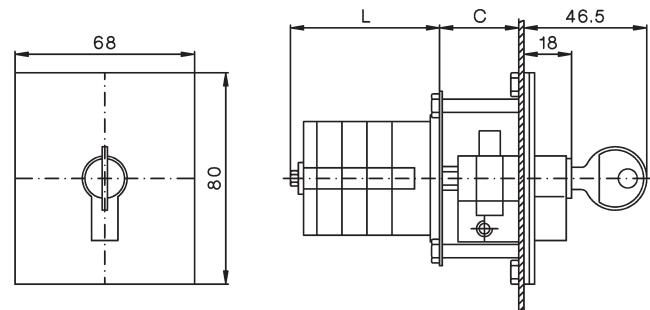**Key operated switch SASI**  
Panel mounting E M10, M20




Mounting holes M10, M20

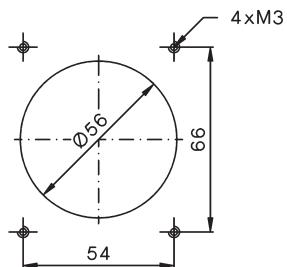

Type	M10	M20
C	20	20


Dimension L see page 262

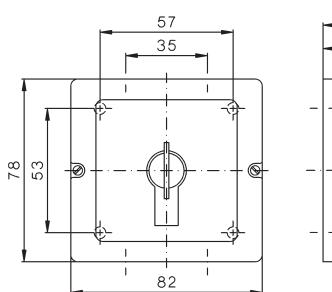**Key operated switch SASI**  
Plastic enclosed P M10, M20



Typ	Dimension P with .. cells				P
	1	2	3	4	
M10	67	79,5	92	104,5	2xM20
M20	79,5	92	104,5	117	2xM20

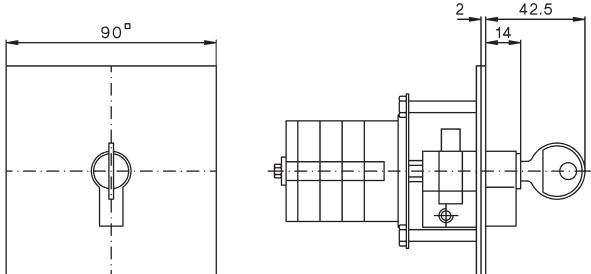
**Key operated switch SASI**  
Flush mounting UP M10, M20




# Telux - Cam Switches

## Padlock devices

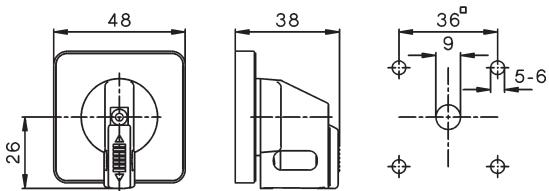
**Padlock device SV1** (max. 2 padlocks with stirrup Ø6mm)  
M10H, M20  
**Mounting holes**  
design E, V



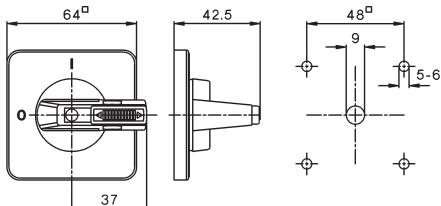
**Padlock device SV164**  
M10H - N33F  
**Mounting holes**  
design E, V



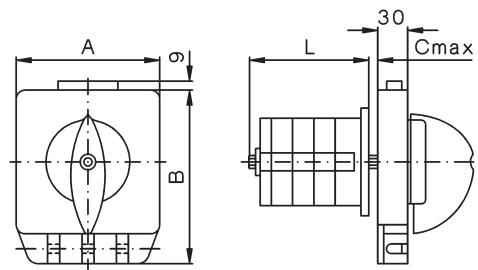**Padlock device SV3** (max. 3 padlocks with stirrup Ø8,5mm)  
Panel mounting E  
N20 - N200, L100 - L1200



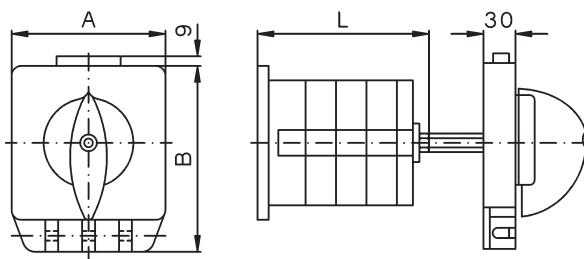
**Base mounting V**  
N20 - N200, L100 - L1200




Further dimensions see page 263

Type	A	B	C
N20, N33F	102	128	5
N40, N61, N80, L100, L160	102	128	7
N100, N200, L400, L600, L800, L1200	132	159	9

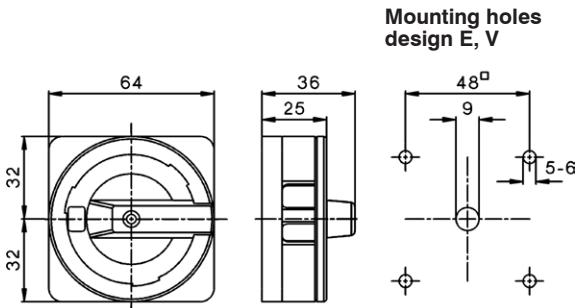
**Padlock device SV4** (max. 3 padlocks with stirrup Ø6mm)  
M10H - N33F



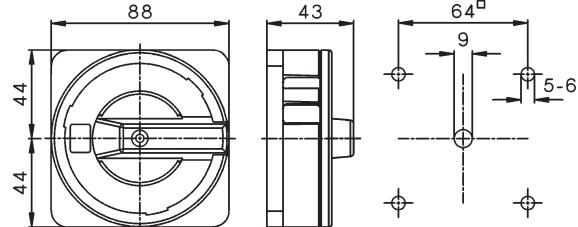
**Padlock device SV4** (max. 3 padlocks with stirrup Ø6mm)  
N40 - N80, L100 - L160  
**Padlock device SV488**  
N20, N33F  
**Mounting holes**  
design E, V



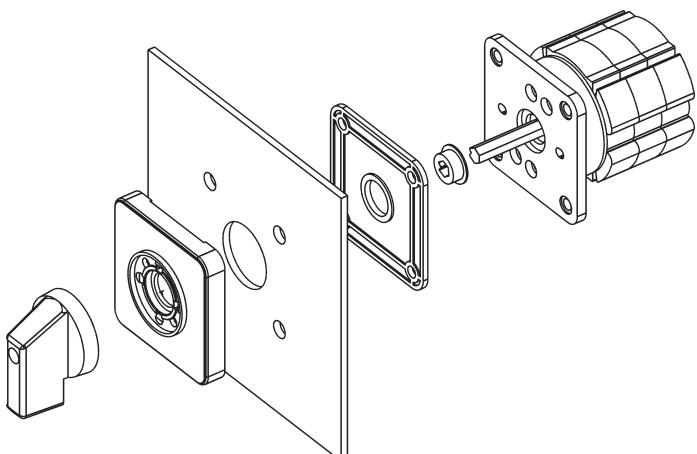**Front plate/switch shaft sealing FPWD**  
N20, N33F





**Mounting holes**





Typ	B	D1	D2
N20, N33F	48	5	17

## Interlocks

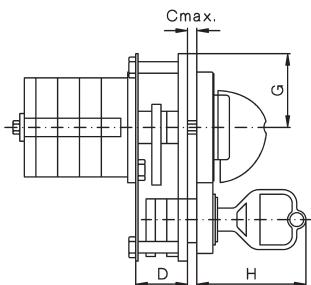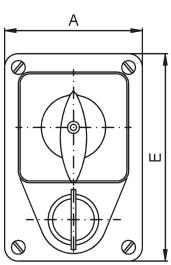
**Lock switch SZ, SZ2**  
Panel mounting E



**Base mounting V**

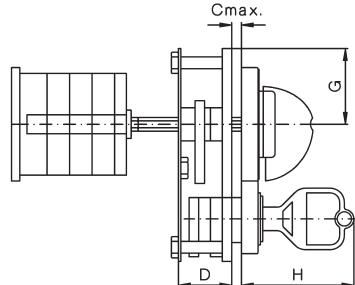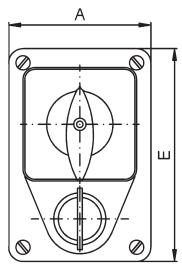



**Mounting holes**





Type	A	B	C	D	D1	D2	D3	E	F	G	H
M10H, M20	60	36	3	22,5	5	8	18,5	90	40	32	47,5
N20, N33F	60	36	3	22,5	5	12	18,5	90	45	32	47,5
N40, N61, N80, L100, L160	90	68	4	24	6	12	18,5	142	61	61,5	48
N100, N200, L400, L600, L800, L1200	140	110	4	27	7	15	18,5	180	83	90,5	49

## Push-button switch lock DV

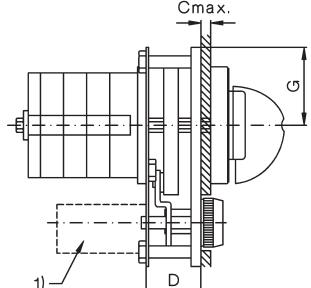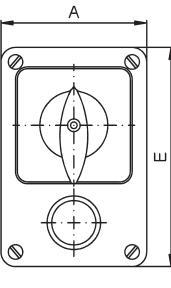
**Switch interlock with electrical contact ET**  
Panel mounting E



**Base mounting V**

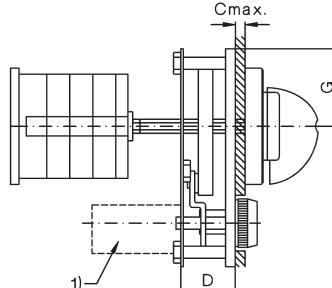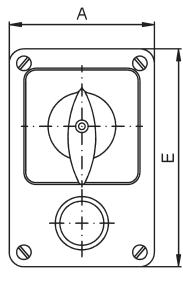

**Mounting holes**


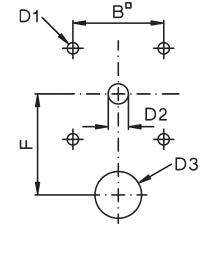


Type	A	B	C	D	D1	D2	D3	E	F	G
M10H, M20	60	36	3	22,5	5	8	26	90	45	32
N20, N33F	60	36	3	22,5	5	10	26	90	45	32
N40, N601 N80, L100, L160	90	68	4	25	6	12	29	142	61	61,5
N100, N200, L400, L600, L800, L1200	140	110	4	41	7	15	29	180	83	90,5

1) only at +ET



## Moisture proofing caps for panel switches FR M10H

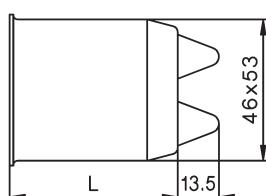Type	Dimension L with .. cells						
	1	2	3	4	5	6	7
M10H	55	55	75	75	88	106	106




## Moisture proofing caps for panel switches FR N20, N40, N61

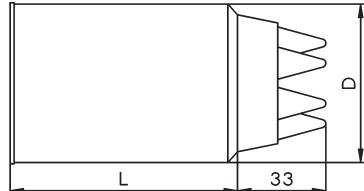Type	A	B	D	E	Dimension L with .. cells				
	1	2	3	4	5	6	7	8	9
N20	60	48	59	5,5	68	68	68	91	91
N40	87	68	83	5,5	82	82	117	117	-





## Interlocks

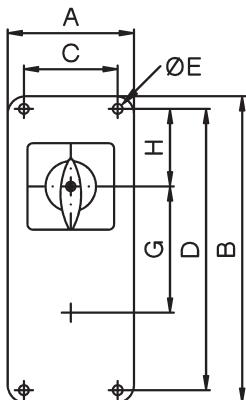Geared switch with two columns ZK2  
Panel mounting E




Base mounting V

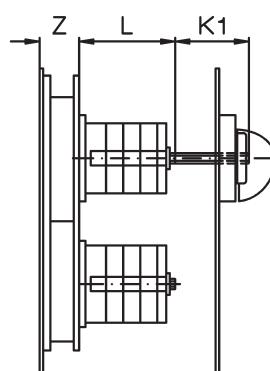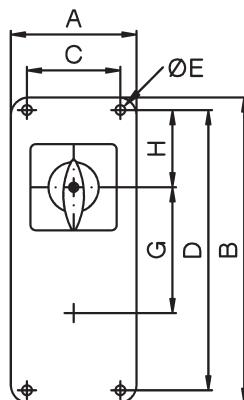



Type	A	B	C	D	E	G	H	Z
M10H, M20	70	170	52	156	5,5	70	43	22
N20, N33F	70	170	52	156	5,5	70	43	22
N40, N61, N80, L100, L160	170	190	150	168	6,5	100	43	23
N100, N200, L400, L600, L800, L1200	180	340	150	310	6,5	140	80	25

Further dimensions see pages 262 and 263

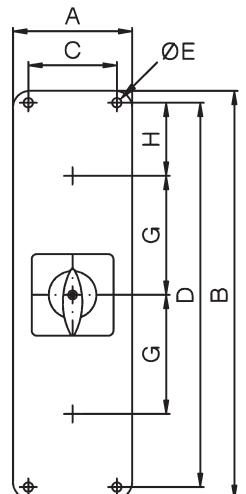Geared switch with three columns ZK3  
Panel mounting E





Base mounting V

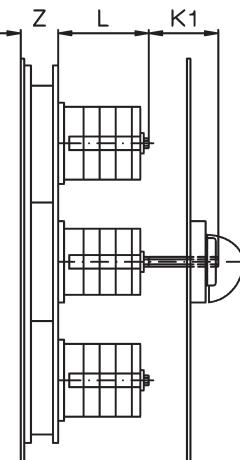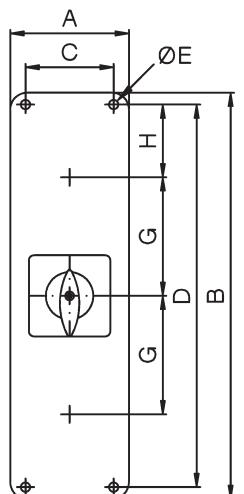


Type	A	B	C	D	E	G	H	Z
M10H, M20	70	240	52	226	5,5	70	43	22
N20, N33F	70	240	52	226	5,5	70	43	22
N40, N61, N80, L100, L160	170	290	150	269	6,5	100	43	23
N100, N200, L400, L600, L800, L1200	180	490	150	460	6,5	140	80	25

Further dimensions see pages 262 and 263

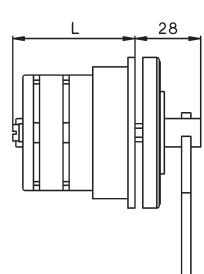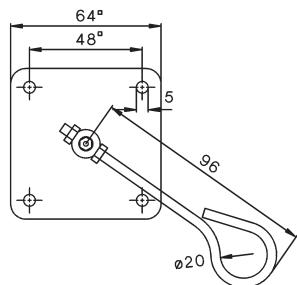Neon safety switch N20 E .. +FEU, N33F E .. +FEU



Further dimensions see pages 262

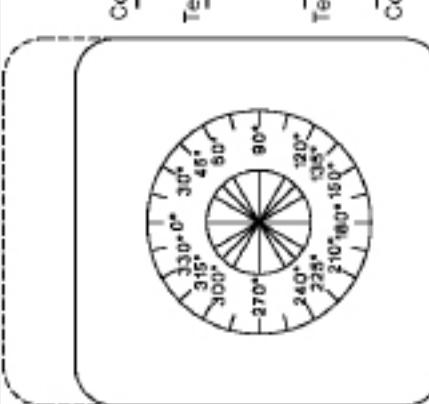Order sheet		Cam switches with special switching program		Customer:																																	
Switch Type	D999E	Benedict GmbH																																			
M4H		A-1220, Vienna, Lieblgasse 7																																			
M10		Tel.: 251 51-0	Fax: 251 51-88																																		
M10H																																					
M20																																					
N20																																					
N33F	L100																																				
N40	L160																																				
N61	L400																																				
N80	L600																																				
N100	L800																																				
N200	L1200																																				
Explanations:		<p><input checked="" type="checkbox"/> Contact closed over several positions</p> <p><input checked="" type="checkbox"/> Spring return from pos.</p>																																			
Handles		<table border="1"> <tr><td>Instrument knob</td><td>G (standard)</td><td>Handle colour</td><td></td></tr> <tr><td>Twist knob</td><td>R (standard N40 -&gt;)</td><td>black (standard)</td><td></td></tr> <tr><td>Toggle knob</td><td>K (standard SMA)</td><td>red</td><td></td></tr> <tr><td>Ball type handle</td><td>B</td><td>grey (standard SMA)</td><td></td></tr> <tr><td>Hand wheel</td><td>HR</td><td>white</td><td></td></tr> <tr><td></td><td></td><td>cream-coloured</td><td></td></tr> <tr><td></td><td></td><td>yellow</td><td></td></tr> <tr><td></td><td></td><td>blue</td><td></td></tr> </table>				Instrument knob	G (standard)	Handle colour		Twist knob	R (standard N40 ->)	black (standard)		Toggle knob	K (standard SMA)	red		Ball type handle	B	grey (standard SMA)		Hand wheel	HR	white				cream-coloured				yellow				blue	
Instrument knob	G (standard)	Handle colour																																			
Twist knob	R (standard N40 ->)	black (standard)																																			
Toggle knob	K (standard SMA)	red																																			
Ball type handle	B	grey (standard SMA)																																			
Hand wheel	HR	white																																			
		cream-coloured																																			
		yellow																																			
		blue																																			
Connect.																																					
Design																																					
Panel mounting	E																																				
Central fixing	Z																																				
Base mounting	V																																				
Snap-on mount	SM																																				
Plastic enclosure	P																																				
IP65	PF																																				
Cast enclosure	G																																				
IP65	GF																																				
Optional extras		<p>Circular switch</p> <p>Key removable</p>																																			
Degree		<p>Marking for switch positions</p>																																			