

BG Series AC Power Circular BarGraphs

ACP4

Watt, VAR and Power Factor Meters for Single and Three Phase Systems

These Weschler BG Series Circular BarGraphs are optimized for AC power measurements. The ACP4 series BarGraphs utilize self contained Current Transformers (CT) and accurate solid state circuitry to measure both single and poly phase systems.

Weschler BarGraphs combine the visual indication of an analog meter with the precision of a digital instrument. Large digits and a wide viewing angle allow operators to easily monitor the signal from a distance. Four case sizes and two versions (standard or enhanced) offer a broad choice of features and functions.


Weschler BarGraph Watt and Varmeters can replace analog instruments such as the Weschler/Westinghouse KP-241, KP-261, KV-241 and KV-261. The analog backplate option duplicates the Westinghouse terminal stud connections. The BG-241 and BG-261 panel footprint and mounting also match other 4½" and 8¾" switchboard meters such as the GE AB40, DB40, AB16 and DB16. The BG-251 and BG-281 sizes match Ashcroft 6" and 8" gauges.

Weschler BarGraph instruments are housed in a rugged steel case. They are designed for long life in utility switchboards and other control applications.


FEATURES

- **High resolution digital display**
- **Signal Trend arrows**
- **Adjustable setpoints**
- **Form C relay outputs**
- **Peak and Valley hold**
- **Analog retransmit**
- **Rugged steel case**


The Weschler ACP4 Power Series BarGraph is a self-contained instrument. No external current transformers, voltage transformers or phase shifters are required to measure up to 240V and 10A. However correct installation is critical. Consult the phaser diagrams to determine the proper configuration and phase orientation for the application, particularly in retrofit situations. Note that some three phase analog VAR meters may have been specified as a Wattmeter with a VAR scaleplate and 90 degree phase shifter. The ACP4 only supports an external phase shifter in 4-wire systems.

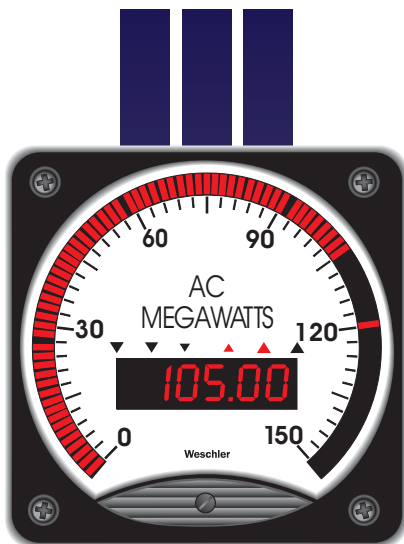

BG-261

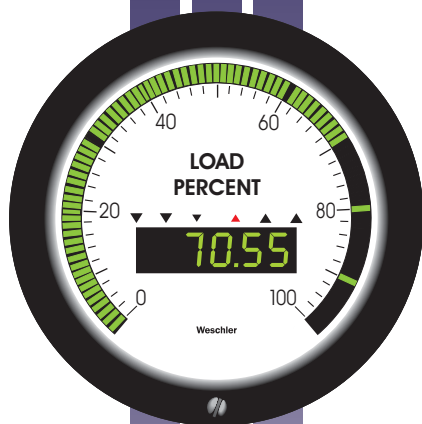

BG-281



BG-251



BG-241

FEATURES

Wattmeters and Varmeters

	Standard	Enhanced
Measurement Range	± 19999	-9999 to 50000 (Neg Autoscale)
Potential Range	120, 240 V rms	120, 240 V rms
Self-Contained Current Maximum	10 A rms	10 A rms
Numeric Display Characters	4½ Digit	4¾ Digit
Numeric Display Color	Red	Red, Green or Amber
Bar Color	Red	Red, Green or Amber
Bar Segments	101	101
Bar Resolution	1%	1%
Display Brightness	Fixed	Two Level Programmable
Alarm Hysteresis	0.5, 1 & 2% FS	0.0-10.0% FS
Relays	2 or 4 Form C	2 or 4 Form C
Relay Latching Mode	N/A	Yes
Relay Fail-safe Mode	N/A	N/A
HI - LO Alarms	2 HI, 2 LO	Individually Programmable
Analog Retransmit	256 Step Resolution	65000 Step Resolution

SPECIFICATIONS

Inputs

Potential (Voltage)	
Nominal	120, 240 Vac
Maximum Continuous	150, 300 Vac
Momentary Overload	175, 325 Vac
Input Impedance	1MΩ
Current	
Nominal	10 A
Maximum Continuous	12.5 A
Momentary Overload	100 A for 500 ms
Input Impedance	Internal CT, 0.1Ω
Frequency	50/60 or 400 Hz
Response Time	1 sec.

Uncertainty

Display (W or VAR)	± 0.5% Full Scale, ± 1 count
Setpoints	± 0.1% Full Scale, ± 1 count
Temperature Coefficient	
Standard	± 1.3 ppm / °C
Enhanced	± 0.5 ppm / °C

Bar Display

Scale Length	
BG-241	285°
BG-261/281	270°
BG-251	270°/345°

Digital Display

Resolution	
Standard	0.005%
Enhanced	0.002%
Height	
BG-241	0.4" (10.16 mm)
BG-261/281	0.8" (20.32 mm)
BG-251	0.56" (14.22 mm)

Communications

RS-232	9600 baud, 1 start bit, 1 stop bit, no parity, no flow control
RS-485	Half duplex, 9600 baud, 1 start bit, 1 stop bit, no parity, no flow control
Protocol	Party Line

AC Sensing Method

Electronic

Setpoint Relays

Quantity	2 or 4
Contact Arrangement	SPDT (Form C)
Type	
Standard	2 HI (ascending trip) and 2 LO (descending trip)
Enhanced	All programmable HI or LO
Contact Ratings	5A, 120/240 Vac or 30 Vdc resistive 1/14 HP 120/240 Vac inductive
Contact Protection	MOV clamp
Hysteresis	Selectable for all setpoints collectively

Analog Retransmit

Standard	256 step resolution, voltage source 0-1, 4-20, 10-50 ma; 0-5, 1-5 V
Enhanced	65000 step resolution, current source 0-24 ma, 0-10 V programmable

Environment

Operating Temperature	-20 to 60°C (Standard) -20 to 50°C (Enhanced)
Humidity	0- 95% non-condensing. Condensation allowed with conformal coating option.
Storage Temperature	-40 to 85°C

Meter Power

Nominal	Tolerance	Current (Maximum)	
		Standard	Enhanced
12 V DC	10-15 V	225 ma	825 ma
24 V DC	18-36 V	125 ma	420 ma
28 V DC	18-36 V	100 ma	350 ma
48 V DC	36-72 V	65 ma	210 ma
250 V DC	± 10%	12 ma	25 ma
120 V AC	± 10% (50/60 Hz)	2.5 VA	12.5 VA
240 V AC	± 10% (50/60 Hz)	1.3 VA	12.3 VA
110-250V DC / 85-264V AC		6 VA (3 W)	13 VA (8W)
Fuse		Plug-in, rear panel accessible	

Connections

BG Backplate	#6 screw terminals for AC signals; Phoenix plug in connectors for Relays, Analog Retransmit & Communications (mating connector supplied)
--------------	---

ORDERING GUIDE

PART NUMBER

Specify scale markings and legend when ordering

TYPE:

- 4 = BG-241 4½" Square BarGraph
- 6 = BG-261 8½" Square BarGraph
- 8 = BG-281 8" Circle BarGraph
- 3 = BG-251 6" Circle BarGraph

BAR ZERO POINT:

- B = Zero at Bottom
- H = Zero at 50% mid scale
- F = Zero at F.S.
- S = Special /off scale zero

DISPLAY:

- 4 = 4½ digit Standard (BG-241 only)
- E = 5 digit Enhanced

SETPOINTS:

- N = Hi/Lo
- H = Hi/Hi-Hi
- L = Lo/Lo-Lo
- 4 = Hi-Hi/Hi/Lo/Lo-Lo
- B = 2 relays, programmable Hi or Lo *
- D = 4 relays, programmable Hi or Lo *
- X = None
- S = Special order

*Enhanced only

SETPOINT HYSTERESIS:

- 1 = 1% of F.S.
- 2 = 2% of F.S.
- 5 = 0.5% of F.S.
- X = Not required
- S = Special.
- P = Programmable 0-10% or Latching (Enhanced only)

INPUT TYPE:

- L = Watts single phase
- H = Watts three phase
- V = VARs single phase
- Z = VARs three phase
- Y = VARs three phase for external phase shifter (4-wire only)
- G = Power factor (display 1.00 max, specify lag on right or left)

Specify:

CT ratio _____ Full scale Watts value _____

PT ratio _____ External phase shifter _____

System Delta or WYE

DIGIT COLOR**:

- B = Enhanced Red
- X = Standard Red (BG-241 only)
- G = Enhance Green
- A = Enhanced Amber
- M = Red with Multi-color bar *
- S = Special

*Enhanced only

- Y = Spraytight Front & Rear (241/261)
- Z = Spraytight Front (241/261)
- K = Conformal Coating
- A = Custom Artwork
- X = NA

- T = Trend Indicator
- X = NA

- P = Peak/Valley Hold
- X = NA

COMMUNICATION:

- A = RS232
- C = RS485 Bi-directional
- X = None

RETRANSMIT:

- A = 4-20mA DC into 250Ω
- B = 0-1mA DC into 1000Ω
- C = 1-5V DC
- D = 0-1V DC
- F = 4-20mA DC, 700Ω max. (isolated)
- G = 0-1mA (isolated)
- T = 0-10V across 500Ω (isolated) *
- K = 0-1V across 50Ω (isolated) *
- M = 1-5V across 250Ω (isolated) *
- X = None

*Enhanced only.

Isolated requires AC power

POWER:

- 1 = 120V AC 50/60Hz
- 2 = 240V AC 50/60Hz
- 4 = 12V DC *
- 6 = 250V DC
- 7 = 24V DC
- 8 = 28V DC
- 9 = 48V DC
- U = 110-250V DC / 85-264V AC, 50-440Hz

*Max ambient 45°C

INPUT LEVEL:

- 12 = Single phase two wire 1 element
- 13 = Single phase three wire 2 element
- 33 = Three phase three wire 2 element
- 34 = Three phase four wire 2½ element
- 3E = Three phase four wire 3 element

**bar color matches digit color unless specified on order

EXAMPLE:

4	B	4	N	1	H	3	3	1	F	A	P	T	Y	X
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

(4) BG-241, (B) zero at bottom, (4) 4-1/2 digit Standard display, (N) Hi/Lo setpoint, (1) 1% of F.S. setpoint hysteresis, (H) Watts, poly phase, (33) Three phase three wire, (1) 120 VAC 50/60 Hz power, (F) 4-20 mADC isolated retransmit, (A) RS232 communication, (P) peak/valley hold, (T) trend indicator, (Y) spray tight face, (X) red LED color

Options and features vary by model. Contact factory for details and latest specifications.



**WESCHLER
INSTRUMENTS**

DIVISION OF HUGHES CORPORATION


16900 FOLTZ PARKWAY - CLEVELAND, OH 44149

Phone: (440) 238-2550 - Fax: (440) 238-0660


www.weschler.com e-mail: sales@weschler.com

DIMENSIONS

BG-241



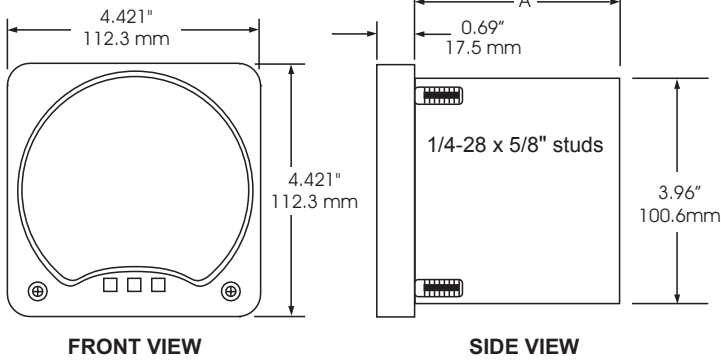


BG-261

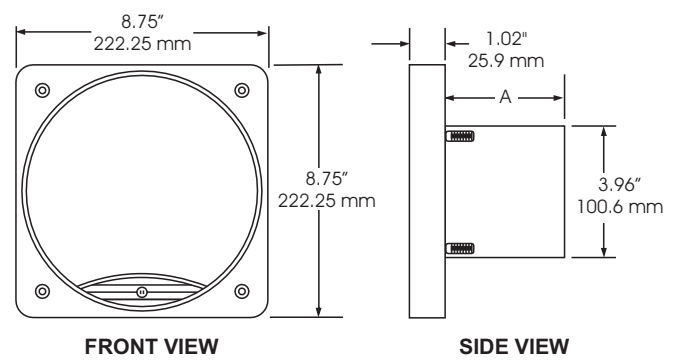

A = 5.15" (130.8mm). Add 0.6" (15mm) for screw terminals or 0.85" (22mm) for studs on analog backplate

BG-251 / 281

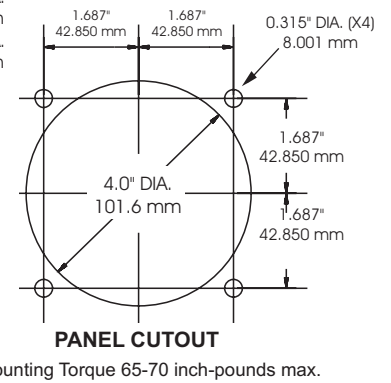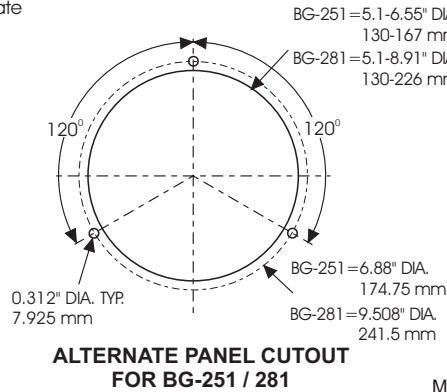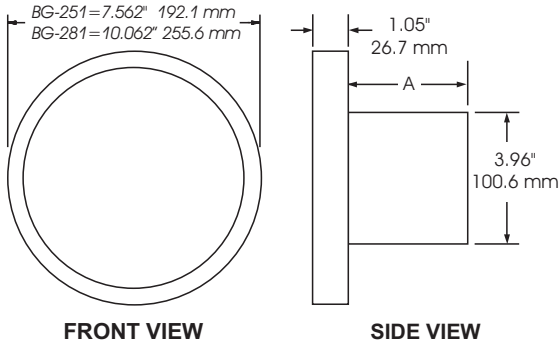

TERMINAL CONNECTIONS

