

## **CONNECT INTERFACE**

smartGAS item number: Z6-000006

















Digital interface compatible to all smartGAS EVO – sensors: BASIC<sup>EVO</sup> FLOW<sup>EVO</sup>

The CONNECT INTERFACE electronic offers a simple solution for connecting smartGAS EVO - sensors in various applications using standardized interfaces. Thanks to the analogue outputs (e.g. 4-20mA, 0-10V) or the RS485 Modbus interfaces of the CONNECT INTERFACE all smartGAS sensors can be directly connected to a variety of process control analyzing systems.

The integrated pressure compensation provides a better precision in measurement and the on-board LED indicate the sensor status for easy handling.

- Integrated ambient pressure compensation
- Internal pressure compensation (800 to 1150 mbar)
- Zero and Span calibration per jumper or software
- On board supply (6V DC) for peripheral equipment e.g. micro pump
- Operating status with 3 LED



## **CONNECT INTERFACE**

smartGAS item number: Z6-000006

General features

Dimensions: 72 x 55 x 20 mm (L x W x H)

Weight: 25

Tubing connection: 3 mm (internal  $\emptyset$ ); 5 mm (external  $\emptyset$ )

Electrical inputs and outputs

Supply voltage: 12-28 V (DC)

Analogue output signal: 0(4)-20mA (DC), max. 500 Ohm

(optional Namur NE 43 compatible)

0-2V / 0-5V / 0-10V (DC)

Digital output signal: Modbus ASCII / RTU via RS 485, autobaud, autoframe

Calibration: per jumper or software


Electric connector: screw clamp (max. cable  $\emptyset = 1.5 \text{ mm}^2$ )

Climatic conditions

Operating temperature:  $-20 ... +50 \,^{\circ}\text{C}$ Storage temperature:  $-20 ... +60 \,^{\circ}\text{C}$ Air pressure:  $800 ... 1150 \, \text{hPa}$ 

Ambient humidity: 0 .. 95 % relative humidity (not condensing)

## **Mechanical dimensions**

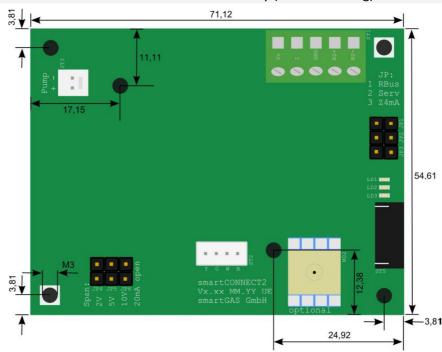

All rights reserved. Any logos and/or product names are trademarks of smartGAS. The reproduction, transfer, distribution or storage of information contained in this brochure in any form without the prior written consent of smartGAS is strictly prohibited. All specifications – technical included – are subject to change without notice. Depending on the application, the target gas and the measurement range the technical data may differ. No liability is accepted for any consequential losses, injury or damage resulting from the use of this document or from any omissions or errors herein. The data is given for guidance only. It does not constitute a specification or an offer for sale.