

1007080000

Light Industrial Master Station



Industrial Intercom



DESCRIPTION

- Fully equipped splashproof master station with free access to all extensions and features
- Flame- and chip-resistant plastic casing. Keyboard foil of UV-cured PVC. Resistant to corrosive fluids
- Electret microphone and red microphone live lamp
- Screw terminals for easy connection of installation cables
- Built-in loudspeaker and possibility to connect an external speaker. Sound level adjustable with a potentiometer inside the station
- Built-in 10W (8 Ohm) VOX operated power amplifier for external loudspeaker

This Industrial Master Station is a splashproof model designed for humid, dirty and outdoor conditions. The station consists of a flame- and chip-resistant casing of durable Bayblend® plastic. The station's front plate - including the keyboard - is made of UV-cured PVC, a material which is resistant to a number of corrosive fluids. The front panel can be removed to allow easy access during installation and service. The station has screw terminals with labels for easy installation. The glands give water- and dustproof connection of the installation cable.

The station's electret microphone automatically adjusts its sensitivity according to the input level, providing undistorted audio in the internal 45 Ohm loudspeaker. The volume is adjustable with potentiometer located inside the casing. An external 20-70 Ohm speaker can be connected or, alternatively, connect an 8-20 Ohm speaker for use with the built-in 10W (8 Ohm) VOX operated power amplifier. The power amplifier requires a separate 12V AC / 2 Amp power supply.

The external speaker must be placed at least one meter away from the station. The station is programmable for permanent private mode and is also prepared for connection of external handset unit.

See also: [additional documentation on wiki.zenitel.com](http://wiki.zenitel.com)

SPECIFICATIONS

MECHANICAL


Order Number	1007080000
Operating Voltage	From exchange without power amp. 12V AC / 2 Amp with power amp.
Cable Requirements	2 pair 0.5 mm ² / 24 AWG twisted telephone cable. + 1 pair 0,8 mm ² / 20 AWG (to transformer if power amplifier is used)
Temperature	-40oC to +55oC
Relative humidity	0% - 95%
Dimensions: (W x H x D)	124 mm x 244 mm x 63 mm, 4.9" x 9.5" x 2.5"
Classifications	IP54

ORDER NUMBER	DESCRIPTION	SHIP WEIGHT
1007080000		0.9 kg / 2 lb.
Supplementary equipment:		
3006100088	VML-1520 Horn Loudspeaker 20 ohm, 15 W	
EOTRF 10115	220V AC / 12 VAC Mains Transformer (for power amplifier option)	1 kg / 2.2 lb.

GENERAL

Finish	Bayblend" plastic. Keyboard of UV-cured P VC (which is resistant to Ethyl-Alcohol, White Spirit, Alkali, Battery Acid, Methanol, Hydrochloric Acid, Citric Acid, Antifreeze, Insecticide, Cola, Disinfectants, Motor Oil, Detergents, etc.)
Sound pressure at 1m from internal speaker	66 dB (0.5 mm cable x 100 m, 8.0V on subscriber board, 1 kHz)
Max. loudspeaker output - external speaker	1.5W (20 Ohm), 10W (8 Ohm) w/power amplifier
Loudspeaker Impedance	45 Ohm (built-in speaker) 20-70 Ohm external (without pow. amp.) 8-20 Ohm external (with power amp.)
Frequency Range	500-5000 Hz (\pm 8 dB)
Mic. Impedance for external handset	200 - 600 Ohm
Connector Type	Screw terminals
Gland Diameter	1 x PG9, 1 x PG11
Indicator	LED (red)

TECHNICAL DIMENSIONS

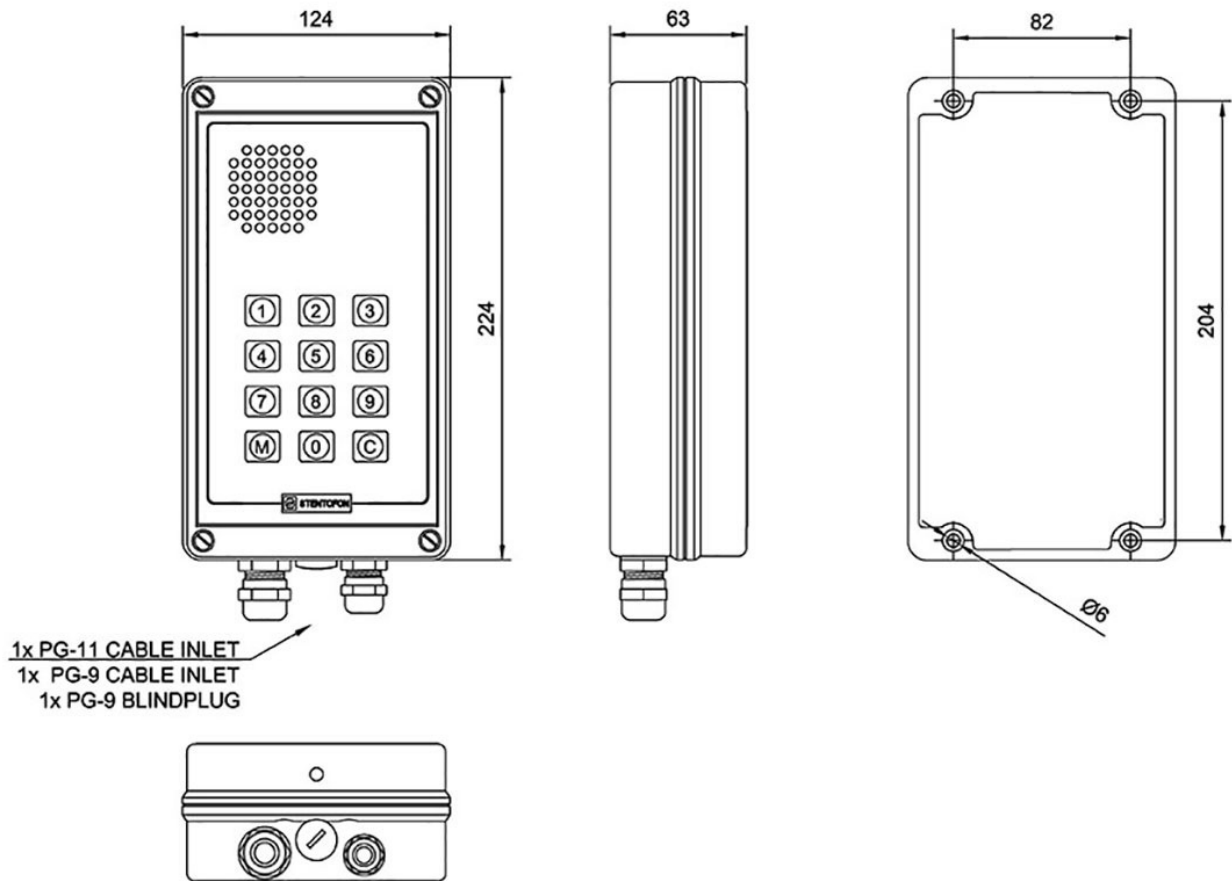

ACCESSORIES



VMP-36-PEL-A
Item Number: 1020600767



VMP-36-PEL-A/15
Item Number: 1020600769



VMP-36-PEL-A/20
Item Number: 1020600770



VMP-36-PELP-A
Item Number: 1020600768



CD-7-VMP
Item Number: 3006202007



VMP-211
Item Number: 3006202024



VMP-250
Item Number: 1020600700



VML-1520
Item Number: 3006100088



EHS-240
Item Number: 3006102041



EHS-2200
Item Number: 3006102036



MODEL-A
Item Number: 3005000029



IRR-3
Item Number: 1020600992