

# InVue® Integrated Flow Controller Model 6550

*High flow, bulk chemical flow control*

Entegris is solving today's flow control challenges using innovative flow control technology. The InVue® Integrated Flow Controller (IFC), Model 6550 is designed for bulk chemical flow control. Engineered with 60, 90, or 120 L/min flow rates, the IFC Model 6550 is ideal in sub-fab bulk chemical delivery applications, and in liquid fluid handling systems requiring high flow volumes.


The integrated flow controller uses proven and reliable differential pressure flow measurement technology and advanced closed-loop process control. Visual indicators provide diagnostics for preventive maintenance, troubleshooting, and alarm conditions, enabling users to integrate more process functionality.

- Integral pressure transducer for additional process information
- Proven superior measurement and control with bubble producing media
- Robust design for stability and long-term reliability
- High accuracy for critical dispense applications
- Fast response for accurate dispense rates
- LED status and discrete alarm output for visual and electronic diagnostics
- Can be installed in any orientation

## Constructed for Compatibility

The InVue Integrated Flow Controller, Model 6550 is designed for use in ultrapure liquid chemical, DI water, and CMP slurry applications. It is also designed for effective control of bubble producing media.

The valve seat and diaphragm are designed to minimize dead volume and fluid shear, reducing the possibility of process contamination. Featuring fluorinated materials for wetted parts, the IFC Model 6550 is ideal for protecting chemical integrity. In addition, the chemical resistant nonwetted parts perform well in harsh chemical environments.

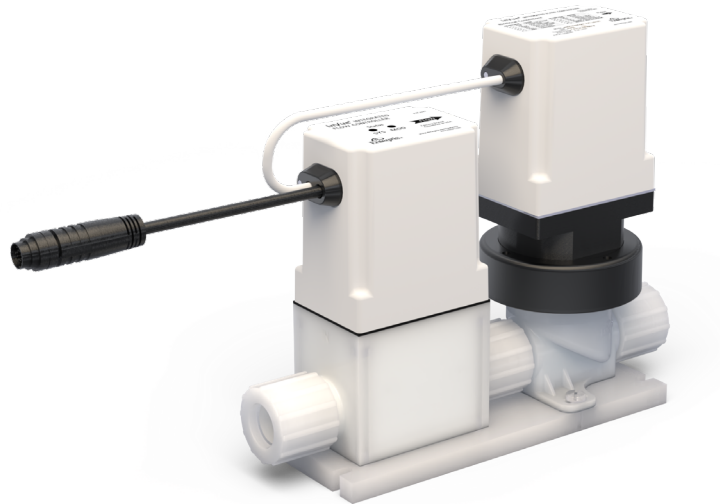

## Advanced Technology


The InVue Integrated Flow Controller, Model 6550 utilizes a unique PTFE valve diaphragm allowing for high volume fluid flow control. Leveraging the latest motorized valve and flow-meter technology, encapsulated internal electronics control all aspects of the flow controller. The product is activated by a setpoint signal (for example, 4 – 20 mA, 0 – 10 VDC) to maintain fluid flow at the desired setpoint.

## APPLICATIONS

The InVue IFC Model 6550 combines Entegris' differential pressure based flowmeter and leading-edge control valve technology to create a closed-loop flow controller ideal for:

- High flow applications such as bulk delivery or tool liquid dispense
- Chemical spiking and blending
- On-demand chemical mixing
- Critical dispense applications

## SPECIFICATIONS


<b>Materials of construction</b>	Wetted parts	Body: PTFE , PFA  Diaphragm: PTFE  Sensor interface: CTFE or PFA  Primary O-ring: Kalrez® 6375 UP
	Nonwetted parts	Polypropylene, PVDF, Viton®, polyurethane, and PVC (in addition to materials listed above)
<b>Operating range</b>		10 – 100% of full scale flow
<b>Flow control accuracy</b>		±1% of full scale (calibrated using DI water @ 23°C [73°])
<b>Repeatability</b>		±0.5% of full scale
<b>Pressure measurement output</b>		0 – 689 kPa (0-100 psig)
<b>Pressure accuracy</b>		±1% of full scale
<b>Operating pressure</b>		103 – 552 kPa (15 – 80 psig) (60 L/min, 90 L/min) 172 – 552 kPa (25 – 80 psig) (120 L/min)
<b>Minimum required differential pressure*</b>		≥15 psi, differential (60 L/min, 90 L/min) ≥25 psi, differential (120 L/min)
<b>Output signals</b>		Two 4 – 20 mA electrically isolated outputs, one for flow and one for pressure
<b>Response time</b>		<3 seconds at ≥15 psid (60 L/min, 90 L/min) <3 seconds at ≥25 psid (120 L/min)
<b>Non-operating over-pressure limit</b>		827 kPa (120 psig)
<b>Process temperature</b>		10 – 65°C (50 – 149°F)
<b>Electrical input</b>		24 VDC (±10%) @ 1.2 amps
<b>Setpoint input signal</b>		4 – 20 mA, 0 – 10 VDC
<b>Enclosure</b>		IP54
<b>Weight</b>		3.2 kg (7 lbs)
<b>Approvals</b>		

\*Minimum required differential pressure is the minimum inlet to outlet fitting differential pressure required to reach full scale flow and response time specifications.


Note: Specifications are subject to change without notice. Please consult Entegris for the most current information.

## DIMENSIONS


Top View

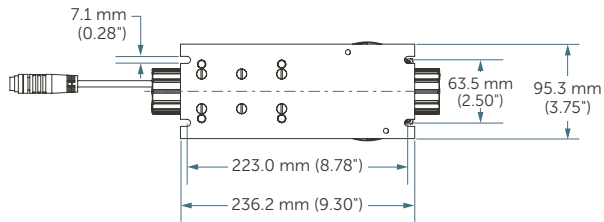

Side View

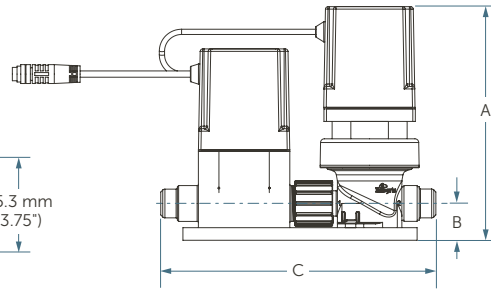

End View




## DIMENSIONS

Inlet/Outlet port connection	A	B	C
1" Flaretek tube fitting	235.6 mm (9.28")	37.1 mm (1.46")	277.5 mm (10.93")
1" PrimeLock tube fitting	239.7 mm (9.44")	41.1 mm (1.62")	282.2 mm (11.11")

## ORDERING INFORMATION

InVue Integrated Flow Controller NT6550: part number

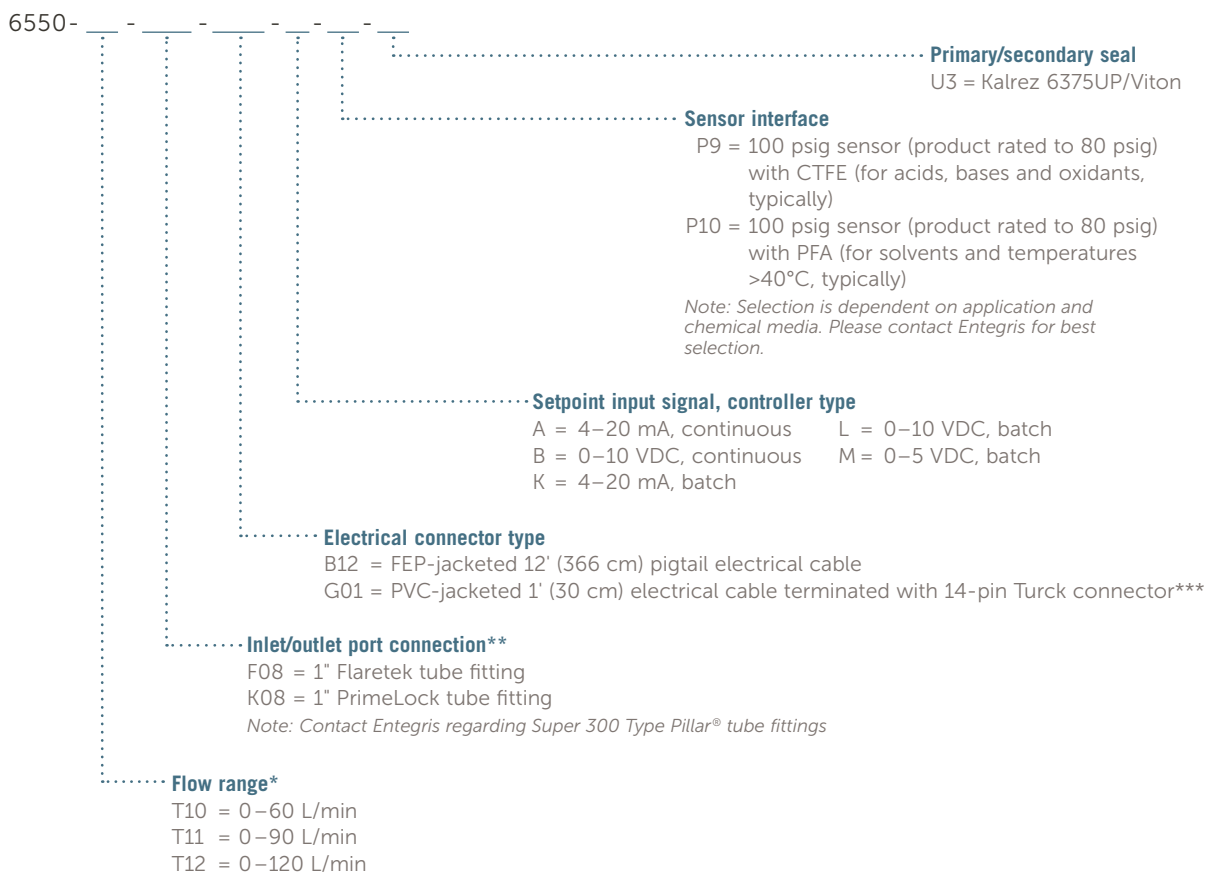

\*Flow ranges are scaled to zero flow, measurement is from 10–100% of full scale flow range.

\*\*For options not shown here, please contact Entegris.

\*\*\*For electrical connector type G01, a 14-pin mating cable is required for installation.

See "Electrical Mating Cables for InVue Flow Controller, Model 6550–Accessory" chart below for ordering information.

Maximum operating pressure for Model 6550 is 552 kPa (80 psig).

Product specified with a flared tube connection is packaged with two PVDF nuts.

For custom configurations and specifications, please contact Entegris.

### Electrical Mating Cables for InVue Flow Controller, Model 6550 – Accessory

Part number	Description	Quantity
14G02	14-pin mating Turck connector with 2-meter (6.5') PVC-jacketed cable	1
14G05	14-pin mating Turck connector with 5-meter (16.4') PVC-jacketed cable	1
14G10	14-pin mating Turck connector with 10-meter (32.8') PVC-jacketed cable	1

#### FOR MORE INFORMATION

Please call your Regional Customer Service Center today to learn what Entegris can do for you. Visit [entegris.com](https://www.entegris.com) and select the [Contact Us](#) link to find the customer service center nearest you.

#### TERMS AND CONDITIONS OF SALE

All purchases are subject to Entegris' Terms and Conditions of Sale. To view and print this information, visit [entegris.com](https://www.entegris.com) and select the [Terms & Conditions](#) link in the footer.



Corporate Headquarters  
129 Concord Road  
Billerica, MA 01821  
USA

Customer Service  
Tel +1 952 556 4181  
Fax +1 952 556 8022  
Toll Free 800 394 4083

Entegris®, the Entegris Rings Design®, and other product names are trademarks of Entegris, Inc. as listed on [entegris.com/trademarks](https://www.entegris.com/trademarks). All third-party product names, logos, and company names are trademarks or registered trademarks of their respective owners. Use of them does not imply any affiliation, sponsorship, or endorsement by the trademark owner.

©2018-2020 Entegris, Inc. | All rights reserved. | Printed in the USA | 3963-10099ENT-0320