

Surface Mount Fuse with Clip, 4.2 x 11.1 mm, Time-Lag T, UMZ 250 = UMT 250 (Au) + UMC 250



IEC 60127-4 · 250 VAC · 125 VDC · Time-Lag T

See below:

[Approvals and Compliances](#)

Description

- VDE/UL Approvals UMT 250, UMT 250 (Au), UMC 250, see variants
- High breaking capacity of 200 A @ 250 VAC (IEC)
- UL approval for 0.08 A - 4 A 277 VAC and 250 VDC

Unique Selling Proposition

- Compact design
- Maximum breaking capacity at minimal footprint

Applications

- Primary protection on SMD PCBs


References

Fuse Kit [Fuse Kit UMT 250 / UMZ 250](#)

Weblinks

[pdf data sheet](#), [html datasheet](#), [General Product Information](#), [Distributor-Stock-Check](#), [Detailed request for product](#), [Microsite](#)

Technical Data

| | |
|------------------------------|---|
| Rated Voltage | 250 VAC, 125 VDC |
| Rated current | 0.08 - 4 A |
| Breaking Capacity | 200 A |
| Characteristic | Time-Lag T |
| Mounting | PCB, SMT |
| Admissible Ambient Air Temp. | -40 °C to 85 °C |
| Climatic Category | 40/085/21 acc. to IEC 60068-1 |
| Material: Housing | Ceramics |
| Material: Terminals | Gold-Plated Copper Alloy |
| Storage Conditions | 0 °C to 60 °C, max. 70% r.h. |
| Product Marking |  , Rated current, Rated Voltage, Characteristic, Breaking Capacity |

| | |
|------------------------------|---|
| Soldering Methods | Reflow Soldering Profile |
| Solderability | 245 °C / 3 sec acc. to IEC 60068-2-58 |
| Resistance to Soldering Heat | 260 °C / 10 sec acc. to IEC 60068-2-58 |
| Moisture Sensitivity Level | MSL 1, J-STD-020 |
| Flammability | min. UL 94V-1 (acc. to EIA/IS-722, Test 4.12) |
| Moisture Resistance Test | MIL-STD-202, Method 106 (50 cycles in a temp./mister chamber) |
| Operational Life | MIL-STD-202, Method 108 (1000h @ 0.42*In @ 70°C) |
| Mechanical Shock | MIL-STD-202, Method 213 Condition A |
| Resistance to Solvents | Cleaning with common solvents |
| Terminal Strength | MIL-STD-202, Method 211A (Deflection of board 1 mm for 1 minute) |

Approvals and Compliances



Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

Approvals





The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products.

Approval Reference Type: UMZ 250

| Approval Logo | Certificates | Certification Body | Description |
|---|-------------------------------|--------------------|---|
|  | VDE Approvals | VDE | VDE Certificate Number: 40013121 / 40023291 |
|  | UL Approvals | UL | UR File Number: E39328 |

Product standards

Product standards that are referenced

| Organization | Design | Standard | Description |
|--|-----------------------|---------------------------------|--|
|  | Designed according to | IEC 60127-6 | Miniature fuses. Part 6. Fuse-holders for miniature fuse-links |
|  | Designed according to | IEC 60127-4 | Miniature fuses. Part 4. Universal modular fuse-links for through-hole and surface mount types |
|  | Designed according to | UL 248-14 / 4248-1 | Low voltage fuses - Part 14: Additional fuses |
|  | Designed according to | CSA22.2 No. 248.14 / No. 4248.1 | Low-Voltage Fuses - Part 14: Supplemental Fuses |





Application standards

Application standards where the product can be used


| Organization | Design | Standard | Description |
|--|--------------------------------|----------------|---|
|  | Suitable for applications acc. | IEC/UL 62368-1 | Audio/video, information and communication technology equipment - Part 1: Safety requirements |

Compliances

The product complies with following Guide Lines

| Identification | Details | Initiator | Description |
|--|--|-------------|---|
|  | CE declaration of conformity | SCHURTER AG | The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008. |
|  | UKCA declaration of conformity | SCHURTER AG | The UKCA marking declares that the product complies with the applicable requirements laid down in the British Amendment of Regulation (EC) 765/2008. |
|  | RoHS | SCHURTER AG | Directive RoHS 2011/65/EU, Amendment (EU) 2015/863 |
|  | REACH | SCHURTER AG | On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force. |

Dimension [mm]

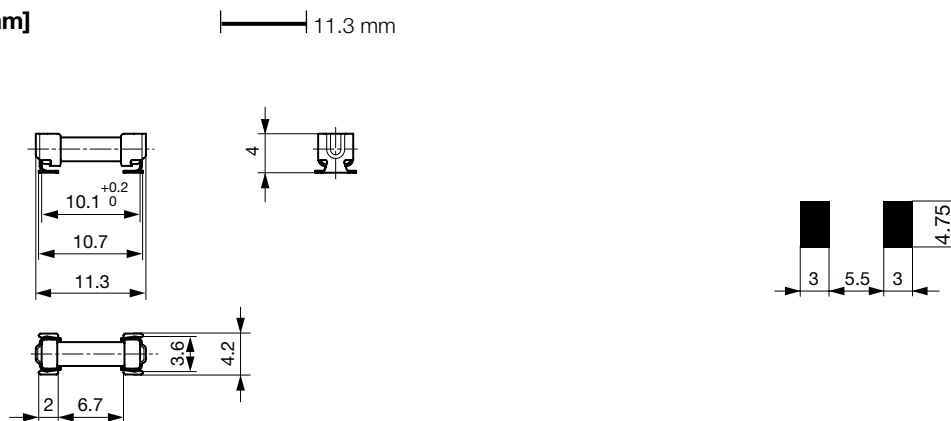


Soldering pads

Pre-Arcing Time


Rated Current In 1.25 x In min. 2.0 x In max. 10.0 x In min. 10.0 x In max.


| | | | | |
|----------------|--------|-------|-------|--------|
| 0.08 A - 4.0 A | 60 min | 120 s | 10 ms | 100 ms |
|----------------|--------|-------|-------|--------|

Time-Current-Curves

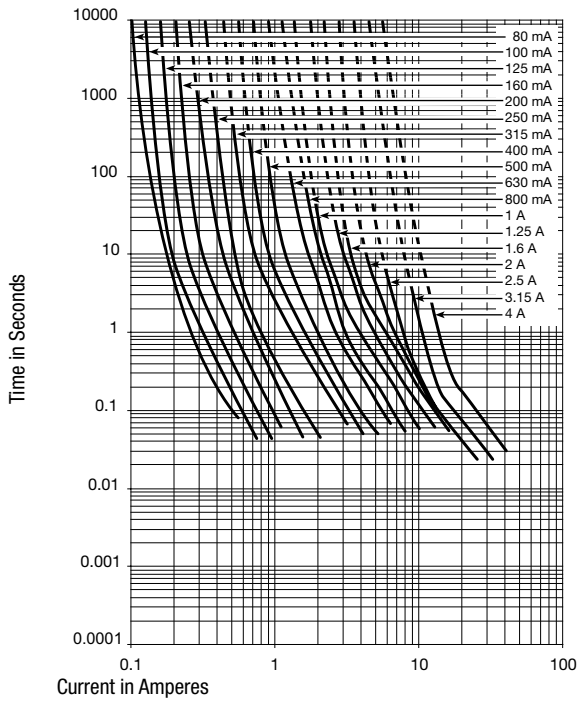

All Variants

| Rated Current [A] | Rated Voltage [VAC] | Rated Voltage [VDC] | Breaking Capacity | Voltage Drop 1.0 I _n max. [mV] | Voltage Drop 1.0 I _n typ. [mV] | Power Dissipation 1.25 I _n max [mW] | Melting I ² t 10.0 I _n typ. [A ² s] |  | Order Number |
|-------------------|---------------------|---------------------|-------------------|---|---|--|--|---|--------------|
| 0.08 | 250 | 125 | 1) | 1300 | 1030 | 200 | 0.022 | ● | 3404.2405.11 |
| 0.08 | 250 | 125 | 1) | 1300 | 1030 | 200 | 0.022 | ● | 3404.2405.22 |
| 0.1 | 250 | 125 | 2) | 1300 | 850 | 200 | 0.04 | ● ● | 3404.2406.11 |
| 0.1 | 250 | 125 | 2) | 1300 | 850 | 200 | 0.04 | ● ● | 3404.2406.22 |
| 0.125 | 250 | 125 | 2) | 1000 | 700 | 200 | 0.055 | ● ● | 3404.2407.11 |
| 0.125 | 250 | 125 | 2) | 1000 | 700 | 200 | 0.055 | ● ● | 3404.2407.22 |
| 0.16 | 250 | 125 | 2) | 1000 | 540 | 240 | 0.057 | ● ● | 3404.2408.11 |
| 0.16 | 250 | 125 | 2) | 1000 | 540 | 240 | 0.057 | ● ● | 3404.2408.22 |
| 0.2 | 250 | 125 | 2) | 1000 | 460 | 500 | 0.092 | ● ● | 3404.2409.11 |
| 0.2 | 250 | 125 | 2) | 1000 | 460 | 500 | 0.092 | ● ● | 3404.2409.22 |
| 0.25 | 250 | 125 | 2) | 800 | 395 | 500 | 0.2 | ● ● | 3404.2410.11 |
| 0.25 | 250 | 125 | 2) | 800 | 395 | 500 | 0.2 | ● ● | 3404.2410.22 |
| 0.315 | 250 | 125 | 2) | 750 | 344 | 500 | 0.27 | ● ● | 3404.2411.11 |
| 0.315 | 250 | 125 | 2) | 750 | 344 | 500 | 0.27 | ● ● | 3404.2411.22 |
| 0.4 | 250 | 125 | 2) | 700 | 320 | 500 | 0.4 | ● ● | 3404.2412.11 |
| 0.4 | 250 | 125 | 2) | 700 | 320 | 500 | 0.4 | ● ● | 3404.2412.22 |
| 0.5 | 250 | 125 | 2) | 600 | 264 | 500 | 0.54 | ● ● | 3404.2413.11 |
| 0.5 | 250 | 125 | 2) | 600 | 264 | 500 | 0.54 | ● ● | 3404.2413.22 |
| 0.63 | 250 | 125 | 2) | 500 | 216 | 500 | 1.1 | ● ● | 3404.2414.11 |
| 0.63 | 250 | 125 | 2) | 500 | 216 | 500 | 1.1 | ● ● | 3404.2414.22 |
| 0.8 | 250 | 125 | 2) | 400 | 174 | 500 | 1.4 | ● ● | 3404.2415.11 |
| 0.8 | 250 | 125 | 2) | 400 | 174 | 500 | 1.4 | ● ● | 3404.2415.22 |
| 1 | 250 | 125 | 3) | 300 | 174 | 500 | 2.8 | ● ● | 3404.2416.11 |
| 1 | 250 | 125 | 3) | 300 | 174 | 500 | 2.8 | ● ● | 3404.2416.22 |
| 1.25 | 250 | 125 | 3) | 300 | 140 | 1000 | 4.5 | ● ● | 3404.2417.11 |
| 1.25 | 250 | 125 | 3) | 300 | 140 | 1000 | 4.5 | ● ● | 3404.2417.22 |
| 1.6 | 250 | 125 | 3) | 300 | 130 | 1000 | 6.9 | ● ● | 3404.2418.11 |
| 1.6 | 250 | 125 | 3) | 300 | 130 | 1000 | 6.9 | ● ● | 3404.2418.22 |

| Rated Current [A] | Rated Voltage [VAC] | Rated Voltage [VDC] | Breaking Capacity | Voltage Drop 1.0 I _n max. [mV] | Voltage Drop 1.0 I _n typ. [mV] | Power Dissipation 1.25 I _n max [mW] | Melting I ² t 10.0 I _n typ. [A ² s] |  | Order Number |
|-------------------|---------------------|---------------------|-------------------|---|---|--|--|---|--------------|
| 2 | 250 | 125 | 3) | 300 | 103 | 1000 | 7.3 | ● ● | 3404.2419.11 |
| 2 | 250 | 125 | 3) | 300 | 103 | 1000 | 7.3 | ● ● | 3404.2419.22 |
| 2.5 | 250 | 125 | 3) | 300 | 90 | 1200 | 7.5 | ● ● | 3404.2420.11 |
| 2.5 | 250 | 125 | 3) | 300 | 90 | 1200 | 7.5 | ● ● | 3404.2420.22 |
| 3.15 | 250 | 125 | 3) | 300 | 95 | 1500 | 14 | ● ● | 3404.2421.11 |
| 3.15 | 250 | 125 | 3) | 300 | 95 | 1500 | 14 | ● ● | 3404.2421.22 |
| 4 | 250 | 125 | 3) | 300 | 83 | 2000 | 26 | ● ● | 3404.2422.11 |
| 4 | 250 | 125 | 3) | 300 | 83 | 2000 | 26 | ● ● | 3404.2422.22 |

Most Popular.

Availability for all products can be searched real-time: <https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

- 1) IEC: 200 A @ 250 VAC / 100 A @ 250 VDC
- 1) UL: 200 A @ 277 VAC / 100 A @ 125 VDC / 35 A @ 250 VDC / 200 A @ 63 VAC/DC
- 2) IEC: 200 A @ 250 VAC / 100 A @ 125 VDC
- 2) UL: 200 A @ 277 VAC / 100 A @ 125 VDC / 35 A @ 250 VDC / 200 A @ 63 VAC/DC
- 3) IEC: 200 A @ 250 VAC / 100 A @ 125 VDC
- 3) UL: 200 A @ 277 VAC / 100 A @ 125 VDC / 35 A @ 250 VDC / 200 A @ 63 VAC/DC

Approval Overview

UMT 250 -> Fuse with tin-plated caps, Approval Status: VDE, UL LISTED, cURus, Free of CCC, PSE JET, KTL

UMT 250 (Au) -> Fuse with gold-plated caps, Approval Status: VDE Mark and cURus

UMC 250 -> Clip, Approval Status: VDE UG Mark and cURus

UMZ 250 = UMT 250 (Au) + UMC 250

There is no approval existing for the combination fuse and clip UMZ 250, but the fuse and the clip are fully approved independently at VDE/UL. See details above.

In the reflow soldering process, the fuse must have gold-plated caps, otherwise fuse and clip would be soldered together. For fuse replacement in the field, a standard UMT 250 fuse with tin-plated caps can be used. This is not allowed for the 80 mA version. This must be replaced with an original UMZ with gold caps.

It is not allowed to replace higher rated current than 4 A in the clip.

| Packaging Unit | .xx = .11 | 100 pcs. in tape in ESD-plastic bag |
|--------------------------|-----------|---|
| acc. IEC 60286-3 Type 2a | .xx = .22 | 1000 pcs. in tape [W: 24mm and P1: 8mm] on reel [A: 33cm] |