



## Magnetron Specifications Data Sheet:

**75 kW CW L-band Magnetron**

**Model #: CWM-75L**

### Microdry Incorporated

5901 West Highway 22

Crestwood KY, 40014

PH: 502-241-8933

Fax: 502-241-5907

[Info@Microdry.com](mailto:Info@Microdry.com)


- 896, 915, 922, & 929 MHz and Custom Versions
- CW Power Output – 75 kW
- 88% Efficiency, Typical
- Water-Cooled Anode
- Coaxial Launch into WR-975
- External Electromagnet



### Specifications:

Characteristic:	Specification:	Typical:
Frequency of Operation (Fixed):	896, 915, 922, & 929 MHz versions	Custom frequencies available
Frequency Variation:	+/- 10MHz	+/- 5 MHz
CW Power Output Minimum:	75 kW	75 kW
Anode Voltage:	18 kV	17 kV
Anode Current:	5.0 A	5.0 A
Efficiency:	83%	88%
Filament Voltage (Standby):	12.6 V	12.0 V
Filament Current:	115 A	112 A (see filament current backdown Schedule)
Load VSWR, Maximum:	1.1:1 (circulator required)	
RF Launch Type:	Coaxial, into WR-975	
<b>Cooling:</b>		
Water Flow (Anode) Minimum:	3 gpm	
Air Flow (Cathode) Minimum:	5 cfm	
Air Flow (Dome), Minimum:	40 cfm	
Weight, Maximum:	15 lbs / 6.81 Kg	

### Dimensions (Inches):

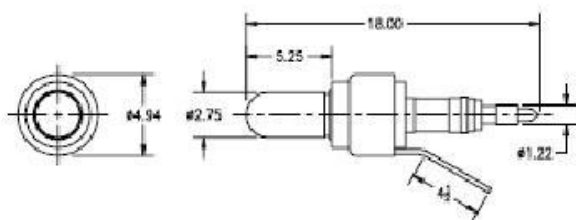

### Filament Current Backdown Schedule:

