

Description

The SU800-16-V8 SingleSense™ Single-Use pH Sensor is a gamma sterilizable and designed with a 1-inch hose barb for pre-installation into a bioprocess container (BPC). The sensor can be used for upstream and downstream BPC applications including media mixing, buffer preparation, and large-scale cell culture bioreactors.

Rugged and always ready to use, no hydration time is required. The sensor can be retracted during mid-run for a 1-point standardization check with the built-in buffer storage chamber.

Model	SU800
Part Number	SU800-16-V8

Sensor Specifications

Measurement Range	2–12 pH
Operational Temp. Range	15°–40° C [60°–104° F]
Storage Temperature	5°–35° C [41°–95° F]
Shelf Life	36 months Post Gamma: 30 months
Gamma Tolerance Level	50 kGy
Sensor/Tubing Interface	1-inch Hose Barb
Sensor Connector Cable	8-pin Variopin

Wetted Materials

Main Sensor Body	PEEK, USP 88 Class VI, USP 87, ADI Free
Port Gasket	Dimethyl Silicone Rubber Pt Cure, USP 88 Class VI, USP 87, ADI Free
O-ring	EPDM, USP 88 Class VI, USP 87, FDA Compliant Extraction Tested 21 CFR, 177.2600, ADI Free
pH Glass Electrode	Lead-free Glass
Ceramic Junction	Alumina Silicate

Features

- pH sensor retracts into the buffer storage chamber in the sensor body for long-term storage
- Sensor can be inserted and retracted multiple times without loss of buffer storage electrolyte


Benefits

- Sensor can be stored and protected in sensor housing until needed
- Always ready to use, no rehydration time required
- Sensor can be retracted into buffer storage chamber during mid-run for 1-point standardization check



SU800-16-V8 Single-Use pH Sensor

Dimensional Drawings of SU800-16-V8

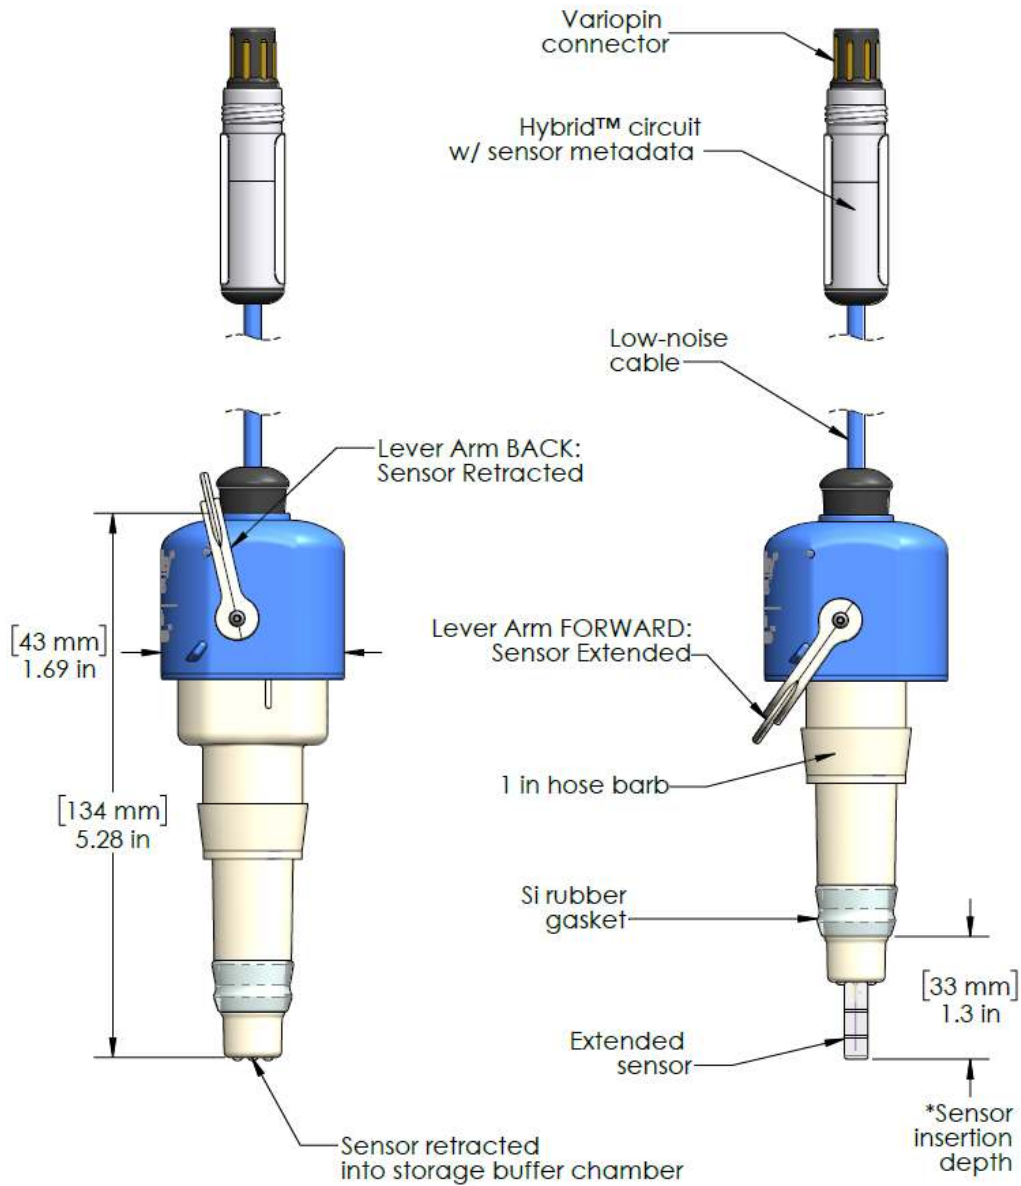

The contents of this publication are presented for information purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding products or services described herein or in their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the design or specification of such products at any time.

Doc Nbr: PSS-062101 R3

Published 20 Sep 2022

© September 2022 Broadley-James Corporation. All rights reserved. Visit www.broadleyjames.com/trademarks for trademark information.

TMP-PSS-102101 R2