

The BA354E loop powered 4/20mA rate totaliser is a third generation field mounting instrument that is electrically and mechanically compatible with the earlier BA354D, but it has a larger display, extended operating temperature and additional features such as a lineariser and bi-directional flow capabilities. Like its predecessor the BA354E is housed in a robust IP66 GRP enclosure with a separate terminal compartment.

Main application of the BA354E is to integrate the 4/20mA output from a hazardous area flow transmitter and display the rate and total flow in engineering units within the hazardous area. A selectable square root extractor enables the output from differential flowmeters to be displayed in linear engineering units and a sixteen segment fully adjustable lineariser provides compensation for nonlinear flowmeters. When fitted with optional alarms the BA354E can detect high and low rates of flow and may be used for simple batching applications.

The **large display** provides maximum contrast and has a very wide viewing angle, allowing the BA354E totaliser to be easily read in most lighting conditions over a wide temperature range. An optional factory fitted backlight is available for applications in poorly illuminated areas. The 18mm high eight digit total display may be configured to show total flow in any units of measurement. The display may be reset to zero using a front panel push button or an external contact closure. The rate display may be calibrated to show flow in the same or in different engineering units to those used for the total display.

The **robust GRP enclosure** has stainless steel fittings, silicone gaskets and an armoured glass window providing IP66 protection. Ingress and impact protection have been independently assessed by Intertek. A separate terminal compartment allows the instrument to be installed and terminated without exposing the display electronics. To further simplify field wiring and subsequent inspection, the terminal cable entries and clamping screws are

forward facing. Additional terminals are provided which may be used for linking the return 4/20mA conductor and the cable screens.

International intrinsic safety certification permits the BA354E to be installed throughout the world. The 4/20mA input terminals comply with the requirements for *simple apparatus* which, together with the low voltage drop, allow the totaliser to be connected in series with most intrinsically safe 4/20mA loops. The BA354E may also be installed in dust hazardous areas. All input safety parameters are the same or greater than those for the preceding BA354D, thus allowing the BA354E to safely replace the earlier model.

A **backlight** which may be loop or separately powered is available as a factory fitted option. It provides green background illumination allowing the display to be read at night or in poorly illuminated areas. When powered from the 4/20mA loop no additional intrinsically safe interface or wiring is required and the indicator input remain compliant with the requirements for *simple apparatus*. Powering from a separate supply produces a brighter backlight but requires an additional intrinsically safe interface and field wiring.

Optional dual alarms which can switch hazardous or safe area loads, such as sounders, beacons or solenoid valves, are available as a factory fitted option. The two galvanically isolated solid state outputs may be independently conditioned as total or rate alarms with normally open or closed outputs. Annunciators on the display show the status of both alarm outputs.

Reliability is ensured by component conformal coating, protection from incorrect connection and radio frequency interference. The totaliser has been subjected to extensive vibration testing and is supported by a three year guarantee.

For panel mounting applications the BA358E has a similar specification but is housed in a 144 x 72 DIN panel mounting enclosure with an IP66 front panel.

BA354E

2-wire 4/20mA rate totaliser

Intrinsically safe for use in gas & dust hazardous areas

- ◆ Loop powered only 1.2V drop.
- ◆ Total display 8 digit 18mm high
Rate display 5 digit 12mm high
- ◆ Intrinsically safe
- ◆ IP66 GRP enclosure with separate terminal compartment.
- ◆ Uni-directional & bi-directional operation.
- ◆ Root extractor and 16 segment lineariser.
- ◆ Optional backlight & alarms.
- ◆ 3 year guarantee

www.beka.co.uk/ba354e



BEKA


associates

BEKA associates Ltd. Old Charlton Rd.
Hitchin, Hertfordshire, SG5 2DA, U.K.
Tel. (01462) 438301 e-mail sales@beka.co.uk
website: www.beka.co.uk


SPECIFICATION

Input	
Current	4 to 20mA
Voltage	Less than 1.2V at 20°C Less than 1.3V at -20°C
Overrange	Less than 5V with optional loop powered backlight ±200mA or ±30V will not damage the instrument
Display	
Type	Liquid crystal, multiplexed 2:1
Zero blanking	Blanked apart from 0 in front of decimal point
Rate~	5 digits 12mm high.
Span	Adjustable between 0 & ±99999 for a 4/20mA input
Zero	Adjustable between 0 & ±99999 with 4mA input
Decimal point	1 of 4 positions or absent
Timebase	Per second, minute or hour
Total~	8 digits 18mm high
Scaling factor	Adjustable between 0.0001 & 99999
Decimal point	1 of 5 positions or absent
Grand total	Maximum count 10 ¹⁶
~ Rate & Total can be shown on either display	
Push buttons	(Function in display mode)
▼	Shows rate display with 4mA input
▲	Shows rate display with 20mA input
P	Displays input in mA or a % of span, has a modified function when alarms are fitted.
E	Time since total display was reset
Accuracy	
Rate display at 20°C	
Linear	±0.02% of span ±1 digit
Root extracting	±16µA at input ±1 digit
Temperature effect on:	
Zero	Less than 25ppm of span/°C
Span	Less than 50ppm of span/°C
Series mode rejection.	Less than 0.05% of span error
Total display	Updated every second
Remote total reset	Contact closure with resistance less than 1kΩ
Intrinsic safety	
International IECEx	
Code	Ex ia IIC T5 Ga Ex ia IIIC T80°C Db IP66- Tamb = -40 to 70°C IECEX ITS11.0014X
Cert. No.	[Dust option, see How to order]
Europe ATEX & UKEX	
Code	Group II Category 1G and 2D Ex ia IIC T5 Ga Ex ia IIIC T80°C Db IP66- Ta = -40 to 70°C [Dust option, see How to order]
Input parameters	
Ui	30V dc
Ii	200mA
Pi	0.84W
Output parameters	Complies with requirements for <i>simple apparatus</i> . ITS11ATEX27253X & ITS21UKEX0087X
Cert. No.	
USA FM	
Standard	3610 Entity
Code	CL I, II, III; Div 1 GP A, B, C, D, E, F & G T5 @ 70°C
Standard	3611 Nonincendive
Code	CL I, II, III; Div 2 GP A, B, C, D, E, F & G T5 @ 70°C 3041487
File	
Canada cFM	
File	3041487C
China CCC	As IECEx - see certificate
India CCOE/PESO	As ATEX - see certificate
Environmental	
Operating temperature	-40 to 70°C
Display	-20 to 70°C
Storage temperature	-40 to 85°C
Humidity	to 95% at 40°C noncondensing
Vibration	Report available
Enclosure	IP66
EMC	Complies with EU & UK EMC Directives
Mechanical	
Terminals	Screw clamp for 0.5 to 1.5mm ² cable
Weight	1.7kg
Accessories	
Backlight	Green, may be loop or separately powered
Loop powered	Totaliser voltage 5V
Separately powered.	10.5V at 35mA from IS interface
Alarms	Two alarms each of which may be independently configured as a rate or total, high or low alarm with a NO or NC output.
Output	Isolated solid state switch complying with requirements for <i>Simple apparatus</i> .
Ron	5Ω + 0.7V max
Roff	IMΩ min

DIMENSIONS (mm)

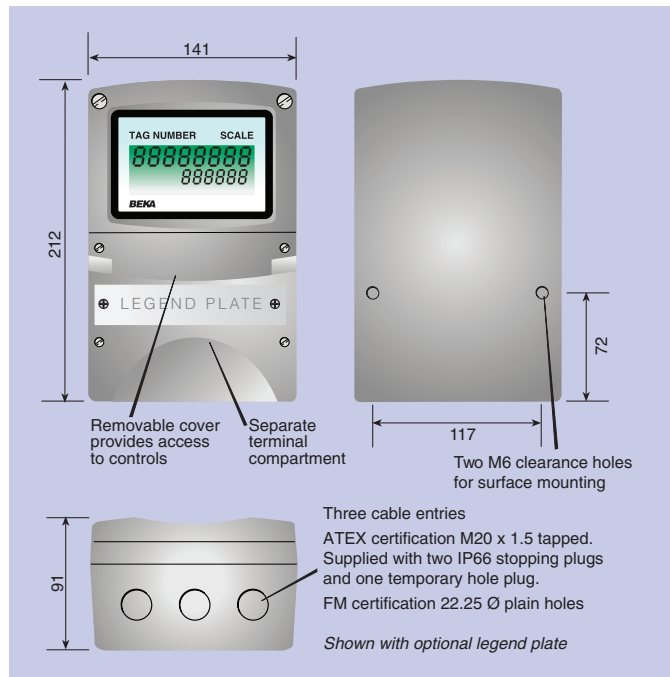

TERMINAL CONNECTIONS

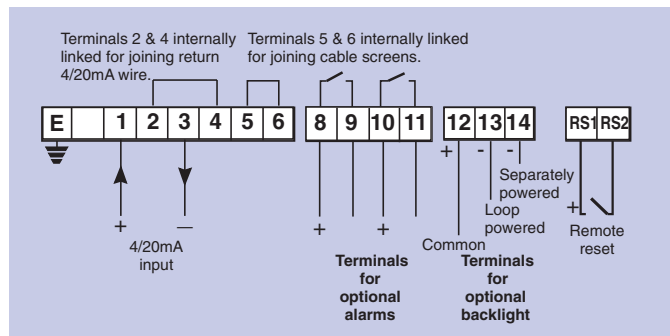

External keypad	Membrane keypad enables totaliser to be controlled without removing cover.
Scale legend	Units of measurement marked onto display escutcheon.
Tag legend	Tag number or application marked onto display escutcheon.
Stainless steel legend plate.	Stainless steel plate etched with tag number or application attached to front of the instrument. # BA392D or BA393 #
Pipe mounting kit	

See accessory datasheet for details

HOW TO ORDER

Model number	BA354E	All versions have IECEx certification.
Certification	ATEX & UKEX gas ATEX & UKEX gas & dust ATEX, UKEX & FM & cFM gas	
Display mode	Linear, root or lineariser*	
Rate display at: 4.000mA 20.000mA	XXXXX XXXXX } Include position of decimal point & sign if negative, plus intermediate points if linearisation is required.*	
Rate timebase	Seconds, minutes or hours*	(Units of rate display)÷(Units of total display)*
Total scale factor		
Accessories	Please specify if required	
External keypad	External keypad	
Display backlight	Backlight	
Dual alarms	Alarms	
Escutcheon marking	Legend required	
Scale	Legend required	
Tag	Legend required	
Stainless legend plate	Legend required	
Pipe mounting kit	BA392D or BA393	

* If calibration information is not supplied the totaliser will be set to display a rate of 0.00 at 4mA and 100.00 at 20mA with a linear display, a timebase of seconds and a total scale factor of 1. Can easily be recalibrated on-site.