



mato

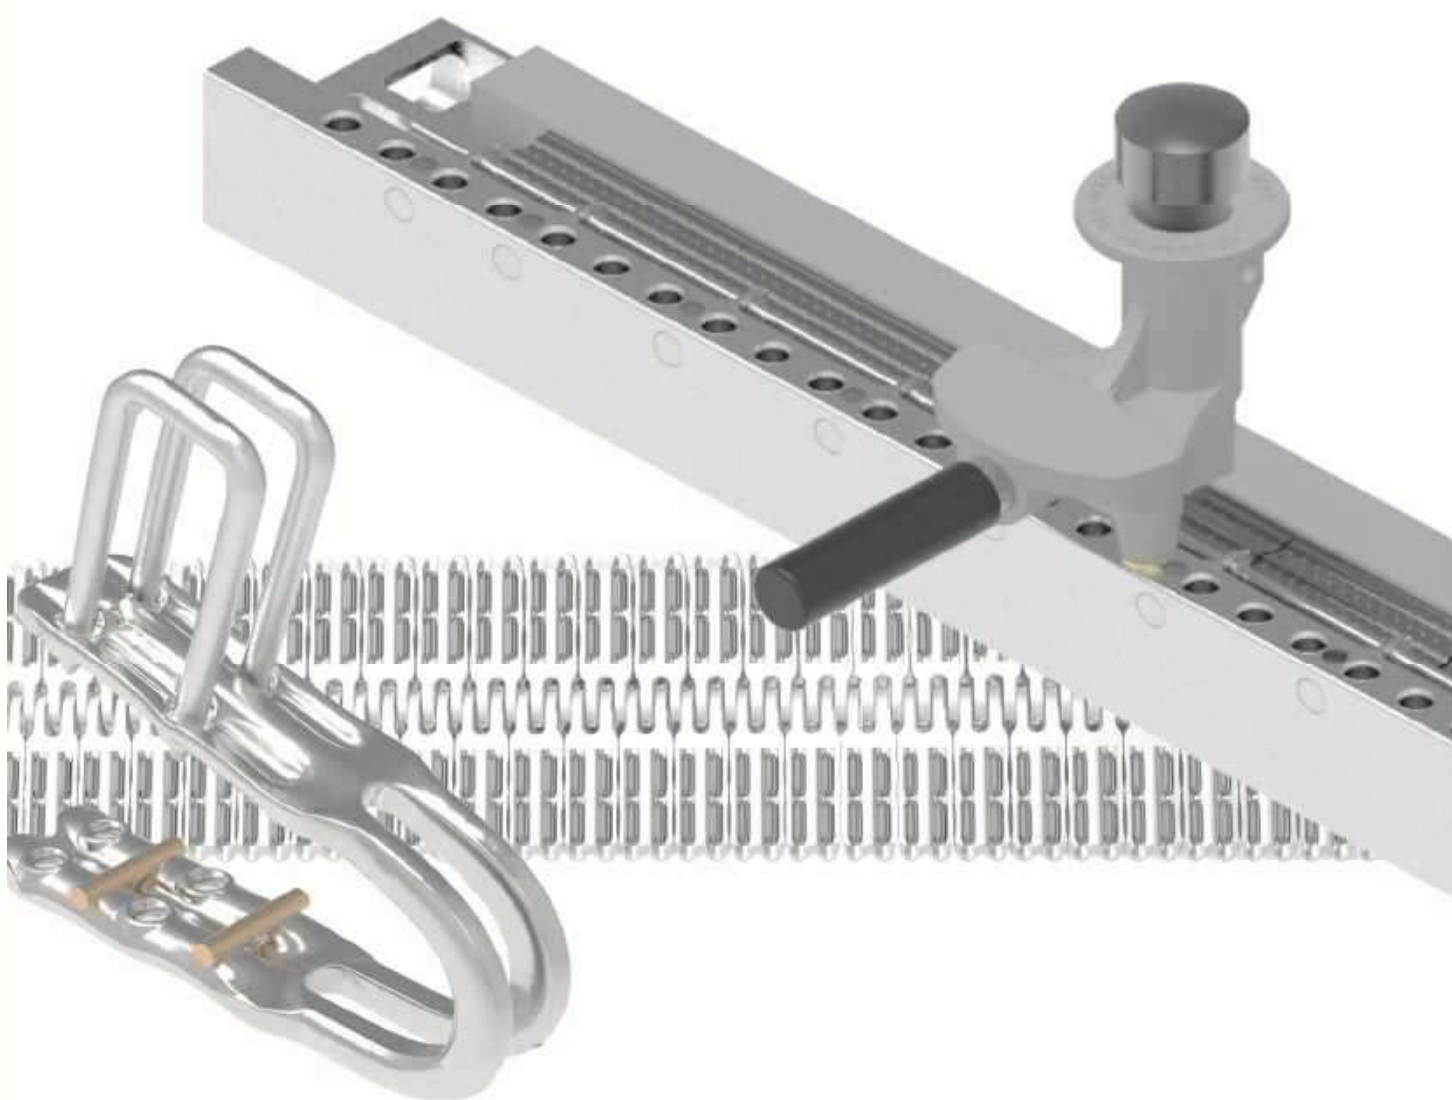



Selection Chart

Hammer Installed Plate Fasteners

The **Systems H30 and H60** are the strongest Hammer Systems. Belt ends with H30 / H60 are connectable to beltends with U30 or S30S or E30. Its outstanding features are:

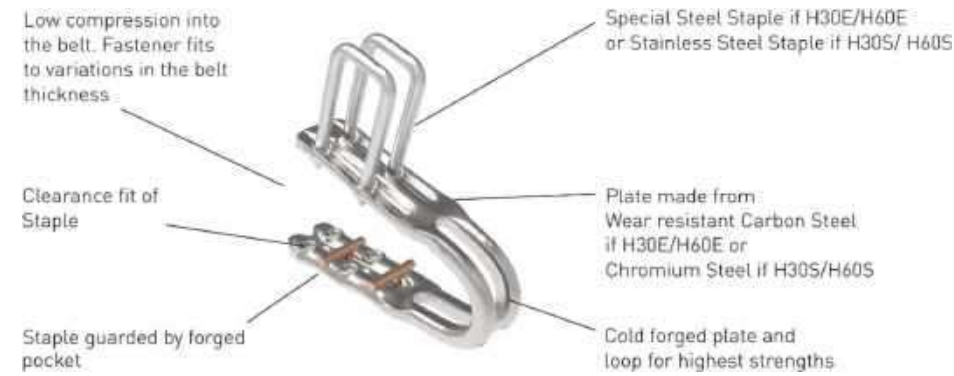

The **MR30-System** is a simple and easy to use Hammer System. In comparison to other Wide Plate Fasteners, the MR30-System has a long life time and can be installed within a short time.

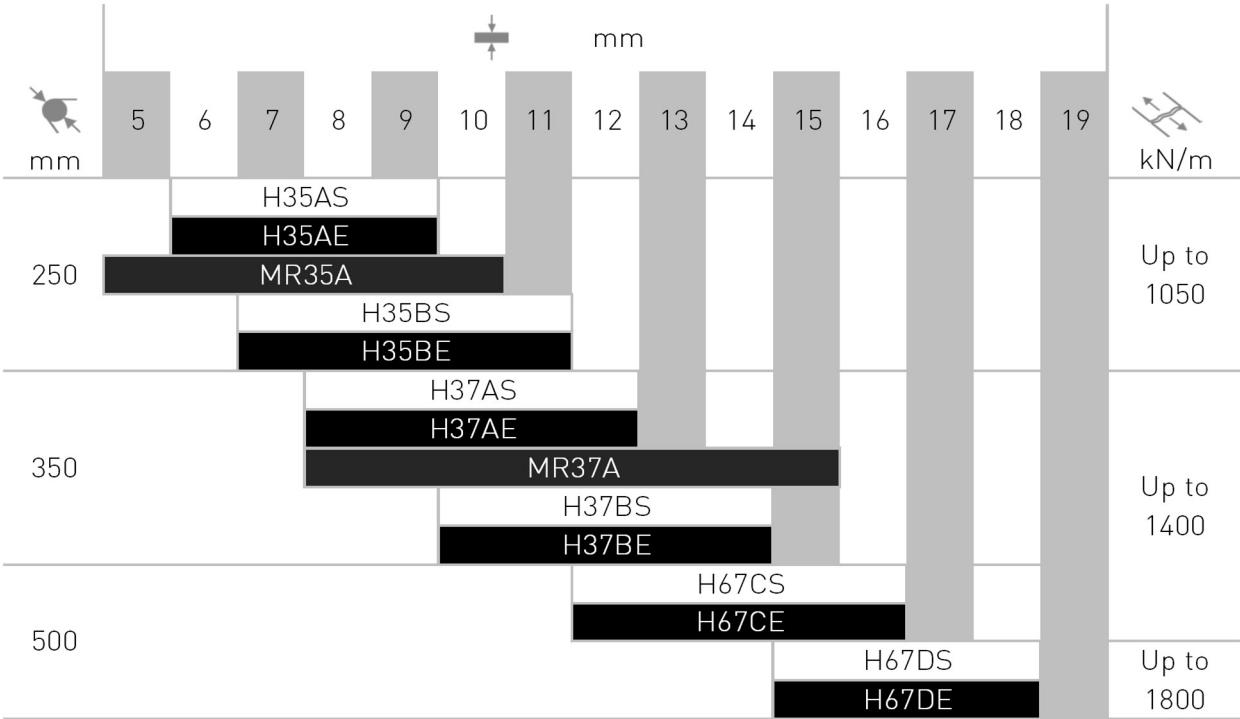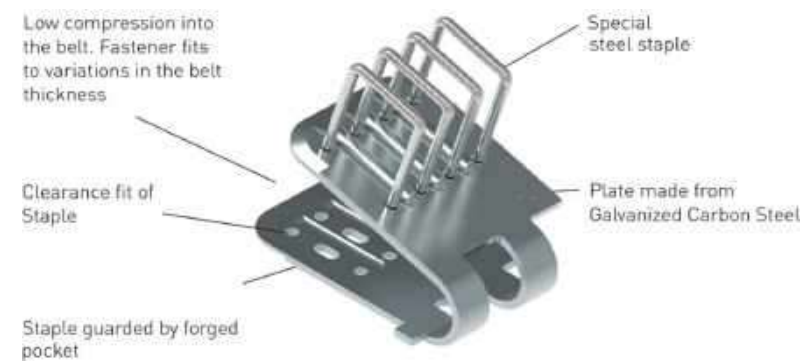

Materials	
Plate	Staple
Cr (S) Steel	CrNi (SS) Steel
Carbon	Special Steel

Thicker belts can be skived (covers) to fit

Belt Width	Belt Thickness	Order No.	kg
Belt Fastener MR35A - Standard			
Belt Strength up to 1050 kN/m		Minimum Pulley Diameter 250 mm	

up to 1000 mm	5 - 10 mm	46 000 10 37	3.2
up to 1200 mm	5 - 10 mm	46 000 10 39	3.5
up to 1400 mm	5 - 10 mm	46 000 10 41	3.9



Ex I M2 c

Belt Fastener MR37A - Standard			
Belt Strength up to 1400 kN/m		Minimum Pulley Diameter 350 mm	

up to 1000 mm	10 - 15 mm	46 000 10 45	3.5
up to 1200 mm	10 - 15 mm	46 000 10 47	4.2
up to 1400 mm	10 - 15 mm	46 000 10 49	4.9

- Low compression in the belt
- Staple Guard
- Wear resistant plate material (galvanized)
- High tensile special steel staples
- Fits to variations in belt thickness

Staple Material: **Special Steel**
Plate Material: **Carbon Steel**

4.9 Units: based on boxes with 2 Fastener Strips with length according belt width, (can be shortened individually). Content is sufficient for one complete lace. (without Connecting Pin)

Installation Units and Accessories

for Hammer Installed Systems MR30

Belt Width	Order No.	kg
Installation Unit MRTA MR30		

Standard equipment of Installation Units (Aluminium Frame) includes a Hammer Frame and a Lacing Head.

1000 mm	46 000 10 52	21.50
1200 mm	46 000 10 53	25.10
1400 mm	46 000 10 54	28.70



Hammer

Hammer H3 (3kg)	46 000 00 78	3.60
-----------------	--------------	------



Lacing Head

Hammer-Lacing Head. For installing the Fastener series MR30

Lacing Head MRK MR30	46 000 10 56	3.20
----------------------	--------------	------



Head Complete for Electric Hammer (SDS-MAX Take-Up)

Electric Hammer-Lacing Head. For installing Fasteners MR30. Suitable for all brands with SDS-MAX Take-Up.

(Minimum of 12 Joule necessary for installation!)

Electric Hammer Head MR30	46 333 02 00	2.90
---------------------------	--------------	------

Punch for Electric Hammer (SDS-MAX Take-Up)

Punch for Electric Hammer Head MR30	46 333 03 00	0.6
-------------------------------------	--------------	-----



Connecting Pins and Accessories see pages 24 - 29 and page 12.