


GZB-S 1/2" / 3/4"

for internal coolant supply, closed collar, coolant proof up to max. 80 bar

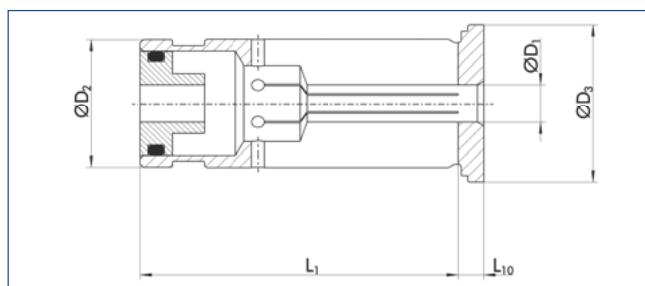

GZB-S 1/2" / 3/4"

para suministro de refrigerante interno, collar cerrado, resistente a refrigerantes hasta 80 bares máx.



Technical data

Datos técnicos

Description			D ₁	D ₂	D ₃	L ₁	L ₁₀	m
Descripción	ID		[inch]	[inch]	[mm]	[mm]	[mm]	[kg]
GZB-S 1/2"-1/8"	0224376	•	1/8"	1/2"	16.5	45.0	2.0	0.1
GZB-S 1/2"-3/16"	0224377	•	3/16"	1/2"	16.5	45.0	2.0	0.1
GZB-S 1/2"-1/4"	0224378	•	1/4"	1/2"	16.5	45.0	2.0	0.1
GZB-S 1/2"-5/16"	0224379	•	5/16"	1/2"	16.5	45.0	2.0	0.1
GZB-S 1/2"-3/8"	0224380	•	3/8"	1/2"	16.5	45.0	2.0	0.1
GZB-S 3/4"-1/8"	0224386	•	1/8"	3/4"	24.0	50.5	2.0	0.1
GZB-S 3/4"-3/16"	0224387	•	3/16"	3/4"	24.0	50.5	2.0	0.1
GZB-S 3/4"-1/4"	0224388	•	1/4"	3/4"	24.0	50.5	2.0	0.1
GZB-S 3/4"-5/16"	0224389	•	5/16"	3/4"	24.0	50.5	2.0	0.1
GZB-S 3/4"-3/8"	0224390	•	3/8"	3/4"	24.0	50.5	2.0	0.1
GZB-S 3/4"-7/16"	0224391	•	7/16"	3/4"	24.0	50.5	2.0	0.1
GZB-S 3/4"-1/2"	0224392	•	1/2"	3/4"	24.0	50.5	2.0	0.1
GZB-S 3/4"-9/16"	0224393	•	9/16"	3/4"	24.0	50.5	2.0	0.1
GZB-S 3/4"-5/8"	0224394	•	5/8"	3/4"	24.0	50.5	2.0	0.1

- Can be supplied from stock

- Posible suministro de existencia

Additional sizes and special designs available on request


Tamaños adicionales y diseños especiales disponibles sobre pedido

Accessories • Accesorios

Intermediate Sleeves • Boquillas intermedias

GZB-S 1/2" / 3/4"

for internal coolant supply, closed collar, coolant proof up to max. 80 bar

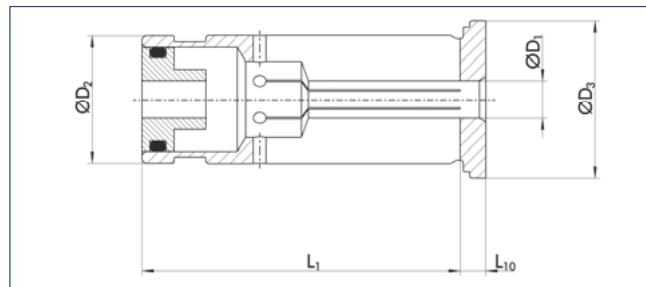

GZB-S 1/2" / 3/4"

para suministro de refrigerante interno, collar cerrado, resistente a refrigerantes hasta 80 bares máx.



Technical data

Description			D ₁	D ₂	D ₃	L ₁	L ₁₀	m
Descripción	ID		[mm]	[inch]	[mm]	[mm]	[mm]	[kg]
GZB-S 1/2"-3	0224381	•	3.0	1/2"	16.5	45.0	2.0	0.1
GZB-S 1/2"-4	0224382	•	4.0	1/2"	16.5	45.0	2.0	0.1
GZB-S 1/2"-5	0224383	•	5.0	1/2"	16.5	45.0	2.0	0.1
GZB-S 1/2"-6	0224384	•	6.0	1/2"	16.5	45.0	2.0	0.1
GZB-S 1/2"-8	0224385	•	8.0	1/2"	16.5	45.0	2.0	0.1
GZB-S 3/4"-3	0224395	•	3.0	3/4"	24.0	50.5	2.0	0.1
GZB-S 3/4"-4	0224396	•	4.0	3/4"	24.0	50.5	2.0	0.1
GZB-S 3/4"-5	0224397	•	5.0	3/4"	24.0	50.5	2.0	0.1
GZB-S 3/4"-6	0224398	•	6.0	3/4"	24.0	50.5	2.0	0.1
GZB-S 3/4"-8	0224399	•	8.0	3/4"	24.0	50.5	2.0	0.1
GZB-S 3/4"-10	0224400	•	10.0	3/4"	24.0	50.5	2.0	0.1
GZB-S 3/4"-12	0224401	•	12.0	3/4"	24.0	50.5	2.0	0.1
GZB-S 3/4"-14	0224402	•	14.0	3/4"	24.0	50.5	2.0	0.1

- Can be supplied from stock

Additional sizes and special designs available on request


Datos técnicos

- Posible suministro de existencia

Tamaños adicionales y diseños especiales disponibles sobre pedido

GZB-S 1 1/4"

for internal coolant supply, closed collar, coolant proof up to max. 80 bar

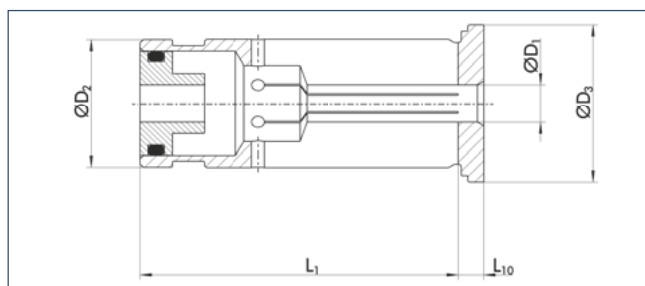

GZB-S 1 1/4"

para suministro de refrigerante interno, collar cerrado, resistente a refrigerantes hasta 80 bares máx.



Technical data

Datos técnicos

Description			D ₁	D ₂	D ₃	L ₁	L ₁₀	m
Descripción	ID		[inch]	[inch]	[mm]	[mm]	[mm]	[kg]
GZB-S 1 1/4"-1/4"	0224404	•	1/4"	1 1/4"	35.5	60.5	3.0	0.3
GZB-S 1 1/4"-5/16"	0224405	•	5/16"	1 1/4"	35.5	60.5	3.0	0.3
GZB-S 1 1/4"-3/8"	0224406	•	3/8"	1 1/4"	35.5	60.5	3.0	0.3
GZB-S 1 1/4"-7/16"	0224407	•	7/16"	1 1/4"	35.5	60.5	3.0	0.3
GZB-S 1 1/4"-1/2"	0224408	•	1/2"	1 1/4"	35.5	60.5	3.0	0.3
GZB-S 1 1/4"-9/16"	0224409	•	9/16"	1 1/4"	35.5	60.5	3.0	0.3
GZB-S 1 1/4"-5/8"	0224410	•	5/8"	1 1/4"	35.5	60.5	3.0	0.3
GZB-S 1 1/4"-11/16"	0224411	•	11/16"	1 1/4"	35.5	60.5	3.0	0.3
GZB-S 1 1/4"-3/4"	0224412	•	3/4"	1 1/4"	35.5	60.5	3.0	0.3
GZB-S 1 1/4"-13/16"	0224413	•	13/16"	1 1/4"	35.5	60.5	3.0	0.3
GZB-S 1 1/4"-7/8"	0224414	•	7/8"	1 1/4"	35.5	60.5	3.0	0.3
GZB-S 1 1/4"-15/16"	0224415	•	15/16"	1 1/4"	35.5	60.5	3.0	0.3
GZB-S 1 1/4"-1"	0224416	•	1"	1 1/4"	35.5	60.5	3.0	0.3

- Can be supplied from stock

- Posible suministro de existencia

 Additional sizes and special designs available on request


 Tamaños adicionales y diseños especiales disponibles sobre pedido

Accessories • Accesorios

Intermediate Sleeves • Boquillas intermedias

GZB-S 1 1/4"

for internal coolant supply, closed collar, coolant proof up to max. 80 bar

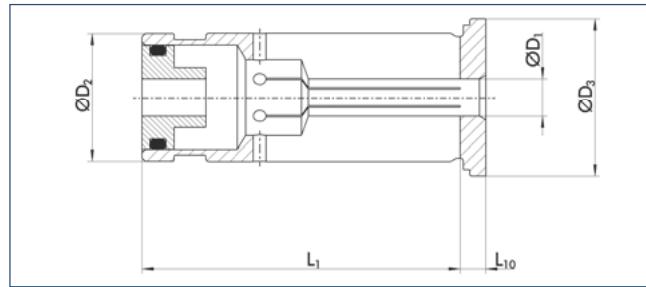

GZB-S 1 1/4"

para suministro de refrigerante interno, collar cerrado, resistente a refrigerantes hasta 80 bares máx.



Technical data

Description			D ₁	D ₂	D ₃	L ₁	L ₁₀	m
Descripción	ID		[mm]	[inch]	[mm]	[mm]	[mm]	[kg]
GZB-S 1 1/4"-8	0224421	•	8.0	1 1/4"	35.5	60.5	3.0	0.3
GZB-S 1 1/4"-10	0224422	•	10.0	1 1/4"	35.5	60.5	3.0	0.3
GZB-S 1 1/4"-12	0224423	•	12.0	1 1/4"	35.5	60.5	3.0	0.3
GZB-S 1 1/4"-14	0224424	•	14.0	1 1/4"	35.5	60.5	3.0	0.3
GZB-S 1 1/4"-16	0224425	•	16.0	1 1/4"	35.5	60.5	3.0	0.3
GZB-S 1 1/4"-18	0224426	•	18.0	1 1/4"	35.5	60.5	3.0	0.3
GZB-S 1 1/4"-20	0224427	•	20.0	1 1/4"	35.5	60.5	3.0	0.3
GZB-S 1 1/4"-25	0224428	•	25.0	1 1/4"	35.5	60.5	3.0	0.3

- Can be supplied from stock

 Additional sizes and special designs available on request


Datos técnicos

- Posible suministro de existencia

 Tamaños adicionales y diseños especiales disponibles sobre pedido

GZB-S 12 / 20

for internal coolant supply, closed collar, coolant proof up to max. 80 bar

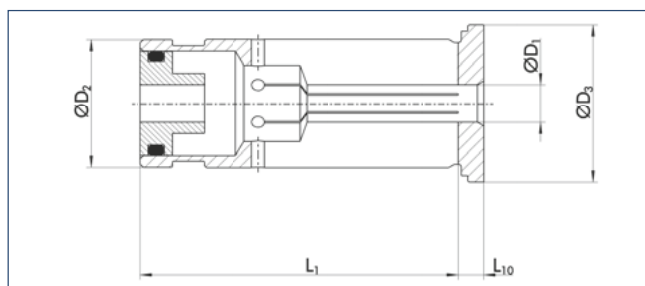

GZB-S 12 / 20

para suministro de refrigerante interno, collar cerrado, resistente a refrigerantes hasta 80 bares máx.



Technical data

Datos técnicos

Description			D ₁	D ₂	D ₃	L ₁	L ₁₀	m
Descripción	ID		[inch]	[mm]	[mm]	[mm]	[mm]	[kg]
GZB-S 12-1/8"	0224429	•	1/8"	12.0	16.5	45.0	2.0	0.1
GZB-S 12-3/16"	0224430	•	3/16"	12.0	16.5	45.0	2.0	0.1
GZB-S 12-1/4"	0224431	•	1/4"	12.0	16.5	45.0	2.0	0.1
GZB-S 12-5/16"	0224432	•	5/16"	12.0	16.5	45.0	2.0	0.1
GZB-S 12-3/8"	0224433	•	3/8"	12.0	16.5	45.0	2.0	0.1
GZB-S 20-1/8"	0224434	•	1/8"	20.0	24.0	50.5	2.0	0.1
GZB-S 20-3/16"	0224435	•	3/16"	20.0	24.0	50.5	2.0	0.1
GZB-S 20-1/4"	0224436	•	1/4"	20.0	24.0	50.5	2.0	0.1
GZB-S 20-5/16"	0224437	•	5/16"	20.0	24.0	50.5	2.0	0.1
GZB-S 20-3/8"	0224438	•	3/8"	20.0	24.0	50.5	2.0	0.1
GZB-S 20-7/16"	0224439	•	7/16"	20.0	24.0	50.5	2.0	0.1
GZB-S 20-1/2"	0224440	•	1/2"	20.0	24.0	50.5	2.0	0.1
GZB-S 20-9/16"	0224441	•	9/16"	20.0	24.0	50.5	2.0	0.1
GZB-S 20-5/8"	0224442	•	5/8"	20.0	24.0	50.5	2.0	0.1

- Can be supplied from stock

- Posible suministro de existencia

 Additional sizes and special designs available on request


 Tamaños adicionales y diseños especiales disponibles sobre pedido

Accessories • Accesorios

Intermediate Sleeves • Boquillas intermedias

GZB-S 12 / 20

for internal coolant supply, closed collar, coolant proof up to max. 80 bar

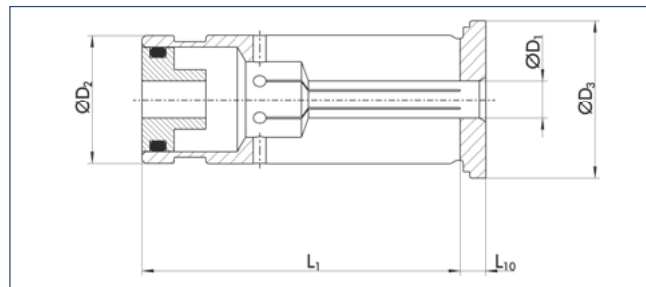

GZB-S 12 / 20

para suministro de refrigerante interno, collar cerrado, resistente a refrigerantes hasta 80 bares máx.



Technical data

Datos técnicos

Description			D ₁	D ₂	D ₃	L ₁	L ₁₀	m
Descripción	ID		[mm]	[mm]	[mm]	[mm]	[mm]	[kg]
GZB-S 12-3	0207910	•	3.0	12.0	16.5	45.0	2.0	0.1
GZB-S 12-4	0207911	•	4.0	12.0	16.5	45.0	2.0	0.1
GZB-S 12-5	0207912	•	5.0	12.0	16.5	45.0	2.0	0.1
GZB-S 12-6	0207913	•	6.0	12.0	16.5	45.0	2.0	0.1
GZB-S 12-8	0207915	•	8.0	12.0	16.5	45.0	2.0	0.1
GZB-S 20-3	0207920	•	3.0	20.0	24.0	50.5	2.0	0.1
GZB-S 20-4	0207921	•	4.0	20.0	24.0	50.5	2.0	0.1
GZB-S 20-5	0207922	•	5.0	20.0	24.0	50.5	2.0	0.1
GZB-S 20-6	0207923	•	6.0	20.0	24.0	50.5	2.0	0.1
GZB-S 20-7	0207924	•	7.0	20.0	24.0	50.5	2.0	0.1
GZB-S 20-8	0207925	•	8.0	20.0	24.0	50.5	2.0	0.1
GZB-S 20-9	0207926	•	9.0	20.0	24.0	50.5	2.0	0.1
GZB-S 20-10	0207927	•	10.0	20.0	24.0	50.5	2.0	0.1
GZB-S 20-11	0207928	•	11.0	20.0	24.0	50.5	2.0	0.1
GZB-S 20-12	0207929	•	12.0	20.0	24.0	50.5	2.0	0.1
GZB-S 20-13	0207930	•	13.0	20.0	24.0	50.5	2.0	0.1
GZB-S 20-14	0207931	•	14.0	20.0	24.0	50.5	2.0	0.1
GZB-S 20-15	0207932	•	15.0	20.0	24.0	50.5	2.0	0.1
GZB-S 20-16	0207933	•	16.0	20.0	24.0	50.5	2.0	0.1
GZB-S 20-17	0207934	•	17.0	20.0	24.0	50.5	2.0	0.1

• Can be supplied from stock


• Posible suministro de existencia

Additional sizes and special designs available on request

Tamaños adicionales y diseños especiales disponibles sobre pedido

GZB-S 32

for internal coolant supply, closed collar, coolant proof up to max. 80 bar

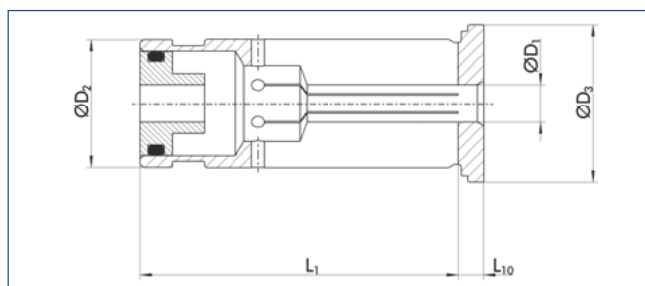

GZB-S 32

para suministro de refrigerante interno, collar cerrado, resistente a refrigerantes hasta 80 bares máx.



Technical data

Description			D ₁	D ₂	D ₃	L ₁	L ₁₀	m
Descripción	ID		[inch]	[mm]	[mm]	[mm]	[mm]	[kg]
GZB-S 32-1/4"	0224445	•	1/4"	32.0	39.0	60.5	3.0	0.3
GZB-S 32-5/16"	0224446	•	5/16"	32.0	39.0	60.5	3.0	0.3
GZB-S 32-3/8"	0224447	•	3/8"	32.0	39.0	60.5	3.0	0.3
GZB-S 32-7/16"	0224448	•	7/16"	32.0	39.0	60.5	3.0	0.3
GZB-S 32-1/2"	0224449	•	1/2"	32.0	39.0	60.5	3.0	0.3
GZB-S 32-9/16"	0224450	•	9/16"	32.0	39.0	60.5	3.0	0.3
GZB-S 32-5/8"	0224451	•	5/8"	32.0	39.0	60.5	3.0	0.3
GZB-S 32-11/16"	0224452	•	11/16"	32.0	39.0	60.5	3.0	0.3
GZB-S 32-3/4"	0224453	•	3/4"	32.0	39.0	60.5	3.0	0.3
GZB-S 32-13/16"	0224454	•	13/16"	32.0	39.0	60.5	3.0	0.3
GZB-S 32-7/8"	0224455	•	7/8"	32.0	39.0	60.5	3.0	0.3
GZB-S 32-15/16"	0224456	•	15/16"	32.0	39.0	60.5	3.0	0.3
GZB-S 32-1"	0224457	•	1"	32.0	39.0	60.5	3.0	0.3

Datos técnicos

- Can be supplied from stock

Additional sizes and special designs available on request

- Posible suministro de existencia


Tamaños adicionales y diseños especiales disponibles sobre pedido

Accessories • Accesorios

Intermediate Sleeves • Boquillas intermedias

GZB-S 22 / 32

for internal coolant supply, closed collar, coolant proof up to max. 80 bar

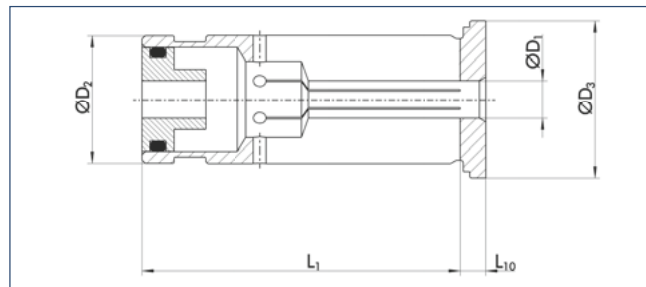

GZB-S 22 / 32

para suministro de refrigerante interno, collar cerrado, resistente a refrigerantes hasta 80 bares máx.



Technical data

Datos técnicos

Description			D ₁	D ₂	D ₃	L ₁	L ₁₀	m
Descripción	ID		[mm]	[mm]	[mm]	[mm]	[mm]	[kg]
GZB-S 22-6	0207892	•	6.0	22.0	25.0	50.5	2.0	0.2
GZB-S 22-8	0207893	•	8.0	22.0	25.0	50.5	2.0	0.2
GZB-S 22-10	0207894	•	10.0	22.0	25.0	50.5	2.0	0.2
GZB-S 22-12	0207895	•	12.0	22.0	25.0	50.5	2.0	0.2
GZB-S 22-14	0207896	•	14.0	22.0	25.0	50.5	2.0	0.2
GZB-S 22-16	0207897	•	16.0	22.0	25.0	50.5	2.0	0.2
GZB-S 25-6	0207865	•	6.0	25.0	29.0	54.5	2.0	0.1
GZB-S 25-8	0207866	•	8.0	25.0	29.0	54.5	2.0	0.1
GZB-S 25-10	0207867	•	10.0	25.0	29.0	54.5	2.0	0.1
GZB-S 25-12	0207868	•	12.0	25.0	29.0	54.5	2.0	0.1
GZB-S 25-14	0207869	•	14.0	25.0	29.0	54.5	2.0	0.1
GZB-S 25-16	0207870	•	16.0	25.0	29.0	54.5	2.0	0.1
GZB-S 25-18	0207871	•	18.0	25.0	29.0	54.5	2.0	0.1
GZB-S 25-20	0207872	•	20.0	25.0	29.0	54.5	2.0	0.1
GZB-S 32-6	0207940	•	6.0	32.0	35.5	60.5	3.0	0.3
GZB-S 32-8	0207941	•	8.0	32.0	35.5	60.5	3.0	0.3
GZB-S 32-10	0207942	•	10.0	32.0	35.5	60.5	3.0	0.3
GZB-S 32-12	0207943	•	12.0	32.0	35.5	60.5	3.0	0.3
GZB-S 32-14	0207944	•	14.0	32.0	35.5	60.5	3.0	0.3
GZB-S 32-16	0207945	•	16.0	32.0	35.5	60.5	3.0	0.3
GZB-S 32-18	0207946	•	18.0	32.0	35.5	60.5	3.0	0.3
GZB-S 32-20	0207947	•	20.0	32.0	35.5	60.5	3.0	0.3
GZB-S 32-25	0207948	•	25.0	32.0	35.5	60.5	3.0	0.3

• Can be supplied from stock


• Posible suministro de existencia

Additional sizes and special designs available on request

Tamaños adicionales y diseños especiales disponibles sobre pedido

GZB-S 1/2" / 3/4"

with peripheral cooling, collar slotted, not coolant proof

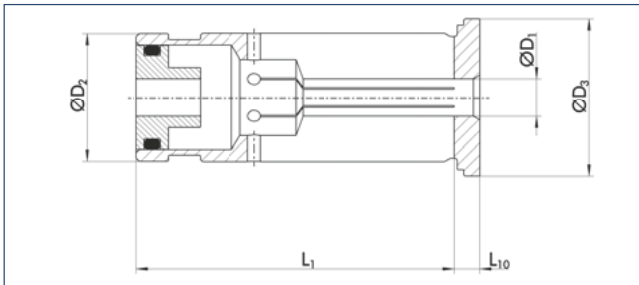

GZB-S 1/2" / 3/4"

con enfriamiento de periféricos, collar ranurado, no resistente a refrigerantes



Technical data

Datos técnicos

Description			D ₁	D ₂	D ₃	L ₁	L ₁₀	m
Descripción	ID		[inch]	[inch]	[mm]	[mm]	[mm]	[kg]
GZB-S 1/2"-1/8"	0217376	•	1/8"	1/2"	16.5	45.0	2.0	0.1
GZB-S 1/2"-3/16"	0217377	•	3/16"	1/2"	16.5	45.0	2.0	0.1
GZB-S 1/2"-1/4"	0217378	•	1/4"	1/2"	16.5	45.0	2.0	0.1
GZB-S 1/2"-5/16"	0217379	•	5/16"	1/2"	16.5	45.0	2.0	0.1
GZB-S 1/2"-3/8"	0217380	•	3/8"	1/2"	16.5	45.0	2.0	0.1
GZB-S 3/4"-1/8"	0217960	•	1/8"	3/4"	24.0	50.5	2.0	0.1
GZB-S 3/4"-3/16"	0217961	•	3/16"	3/4"	24.0	50.5	2.0	0.1
GZB-S 3/4"-1/4"	0217962	•	1/4"	3/4"	24.0	50.5	2.0	0.1
GZB-S 3/4"-5/16"	0217963	•	5/16"	3/4"	24.0	50.5	2.0	0.1
GZB-S 3/4"-3/8"	0217964	•	3/8"	3/4"	24.0	50.5	2.0	0.1
GZB-S 3/4"-7/16"	0217965	•	7/16"	3/4"	24.0	50.5	2.0	0.1
GZB-S 3/4"-1/2"	0217966	•	1/2"	3/4"	24.0	50.5	2.0	0.1
GZB-S 3/4"-9/16"	0217967	•	9/16"	3/4"	24.0	50.5	2.0	0.1
GZB-S 3/4"-5/8"	0217968	•	5/8"	3/4"	24.0	50.5	2.0	0.1

- Can be supplied from stock

- Posible suministro de existencia

Additional sizes and special designs available on request


Tamaños adicionales y diseños especiales disponibles sobre pedido

Accessories • Accesorios

Intermediate Sleeves • Boquillas intermedias

GZB-S 1/2" / 3/4"

with peripheral cooling, collar slotted, not coolant proof

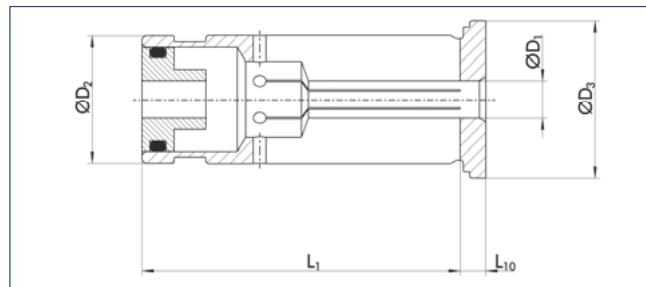

GZB-S 1/2" / 3/4"

con enfriamiento de periféricos, collar ranurado, no resistente a refrigerantes



Technical data

Description			D ₁	D ₂	D ₃	L ₁	L ₁₀	m
Descripción	ID		[mm]	[inch]	[mm]	[mm]	[mm]	[kg]
GZB-S 1/2"-5	0217383	•	5.0	1/2"	16.5	45.0	2.0	0.1
GZB-S 1/2"-6	0217384	•	6.0	1/2"	16.5	45.0	2.0	0.1
GZB-S 3/4"-3	0217969	•	3.0	3/4"	24.0	50.5	2.0	0.1
GZB-S 3/4"-4	0217970	•	4.0	3/4"	24.0	50.5	2.0	0.1
GZB-S 3/4"-6	0217972	•	6.0	3/4"	24.0	50.5	2.0	0.1
GZB-S 3/4"-8	0217973	•	8.0	3/4"	24.0	50.5	2.0	0.1
GZB-S 3/4"-10	0217974	•	10.0	3/4"	24.0	50.5	2.0	0.1
GZB-S 3/4"-12	0217975	•	12.0	3/4"	24.0	50.5	2.0	0.1
GZB-S 3/4"-14	0217976	•	14.0	3/4"	24.0	50.5	2.0	0.1

Datos técnicos

- Can be supplied from stock


i Additional sizes and special designs available on request

- Posible suministro de existencia

i Tamaños adicionales y diseños especiales disponibles sobre pedido

GZB-S 1 1/4"

with peripheral cooling, collar slotted, not coolant proof

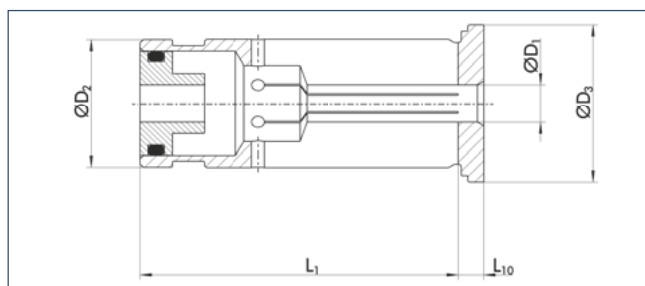

GZB-S 1 1/4"

con enfriamiento de periféricos, collar ranurado, no resistente a refrigerantes



Technical data

Description			D ₁	D ₂	D ₃	L ₁	L ₁₀	m
Descripción	ID		[inch]	[inch]	[mm]	[mm]	[mm]	[kg]
GZB-S 1 1/4"-1/4"	0217980	•	1/4"	1 1/4"	39.0	60.5	3.0	0.3
GZB-S 1 1/4"-5/16"	0217981	•	5/16"	1 1/4"	39.0	60.5	3.0	0.3
GZB-S 1 1/4"-3/8"	0217982	•	3/8"	1 1/4"	39.0	60.5	3.0	0.3
GZB-S 1 1/4"-1/2"	0217984	•	1/2"	1 1/4"	39.0	60.5	3.0	0.3
GZB-S 1 1/4"-9/16"	0217985	•	9/16"	1 1/4"	39.0	60.5	3.0	0.3
GZB-S 1 1/4"-5/8"	0217986	•	5/8"	1 1/4"	39.0	60.5	3.0	0.3
GZB-S 1 1/4"-11/16"	0217987	•	11/16"	1 1/4"	39.0	60.5	3.0	0.3
GZB-S 1 1/4"-3/4"	0217988	•	3/4"	1 1/4"	39.0	60.5	3.0	0.3
GZB-S 1 1/4"-7/8"	0217990	•	7/8"	1 1/4"	39.0	60.5	3.0	0.3
GZB-S 1 1/4"-1"	0217992	•	1"	1 1/4"	39.0	60.5	3.0	0.3

Datos técnicos

- Can be supplied from stock

i Additional sizes and special designs available on request

- Posible suministro de existencia


i Tamaños adicionales y diseños especiales disponibles sobre pedido

Accessories • Accesorios

Intermediate Sleeves • Boquillas intermedias

GZB-S 1 1/4"

with peripheral cooling, collar slotted, not coolant proof

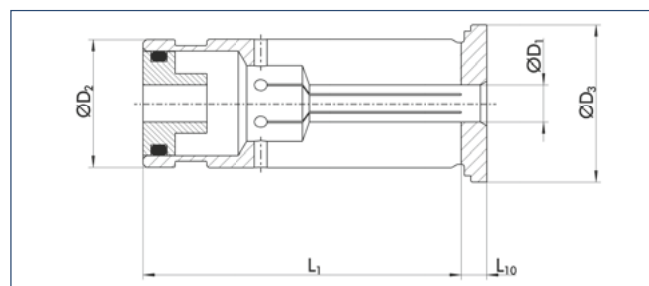

GZB-S 1 1/4"

con enfriamiento de periféricos, collar ranurado, no resistente a refrigerantes



Technical data

Description			D ₁	D ₂	D ₃	L ₁	L ₁₀	m
Descripción	ID		[mm]	[inch]	[mm]	[mm]	[mm]	[kg]
GZB-S 1 1/4"-20	0218010	•	20.0	1 1/4"	39.0	60.5	3.0	0.3
GZB-S 1 1/4"-25	0218011	•	25.0	1 1/4"	39.0	60.5	3.0	0.3

- Can be supplied from stock

 Additional sizes and special designs available on request


Datos técnicos

- Posible suministro de existencia

 Tamaños adicionales y diseños especiales disponibles sobre pedido

GZB-S 8

with peripheral cooling, collar slotted, not coolant proof

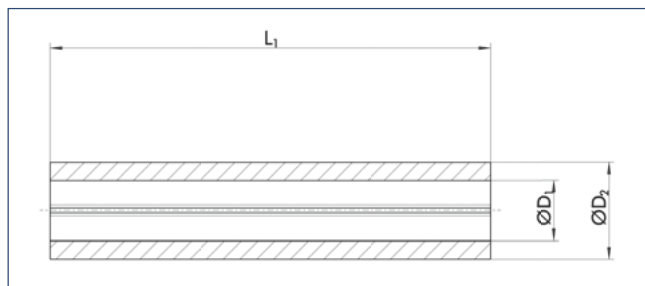

GZB-S 8

con enfriamiento de periféricos, collar ranurado, no resistente a refrigerantes



Technical data

Description		D ₁	D ₂	L ₁	m
Descripción	ID	[inch]	[mm]	[mm]	[kg]
GZB-S 8-1/8"	0217955	1/8"	8.0	37.0	0.1

- Can be supplied from stock

i Additional sizes and special designs available on request

Datos técnicos

- Posible suministro de existencia


i Tamaños adicionales y diseños especiales disponibles sobre pedido

Accessories • Accesorios

Intermediate Sleeves • Boquillas intermedias

GZB-S 8

with peripheral cooling, collar slotted, not coolant proof

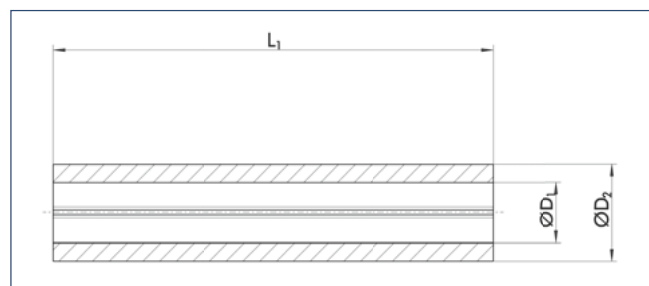

GZB-S 8

con enfriamiento de periféricos, collar ranurado, no resistente a refrigerantes



Technical data

Description			D ₁	D ₂	L ₁	m
Descripción	ID		[mm]	[mm]	[mm]	[kg]
GZB-S 8-1.0	0206237	•	1.0	8.0	37.0	0.1
GZB-S 8-1.5	0206242		1.5	8.0	37.0	0.1
GZB-S 8-2.0	0206247	•	2.0	8.0	37.0	0.1
GZB-S 8-2.5	0206252		2.5	8.0	37.0	0.1
GZB-S 8-3.0	0206257	•	3.0	8.0	37.0	0.1
GZB-S 8-3.5	0206262		3.5	8.0	37.0	0.1


Datos técnicos

- Can be supplied from stock

- Posible suministro de existencia

GZB-S 8

with peripheral cooling, collar slotted, not coolant proof

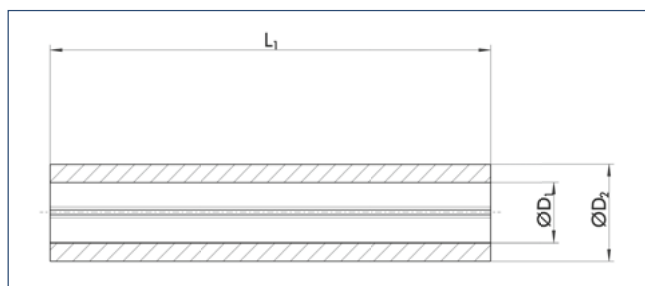

GZB-S 8

con enfriamiento de periféricos, collar ranurado, no resistente a refrigerantes



Technical data

Description			D ₁	D ₂	L ₁	m
Descripción	ID		[mm]	[mm]	[mm]	[kg]
GZB-S 8-4.0	0206267	•	4.0	8.0	37.0	0.1
GZB-S 8-4.5	0206272		4.5	8.0	37.0	0.1
GZB-S 8-5.0	0206277	•	5.0	8.0	37.0	0.1
GZB-S 8-5.5	0206282		5.5	8.0	37.0	0.1
GZB-S 8-6.0	0206287	•	6.0	8.0	37.0	0.1

Datos técnicos

- Can be supplied from stock

i Additional sizes and special designs available on request

- Posible suministro de existencia


i Tamaños adicionales y diseños especiales disponibles sobre pedido

Accessories • Accesorios

Intermediate Sleeves • Boquillas intermedias

GZB-S 12 / 20

with peripheral cooling, collar slotted, not coolant proof

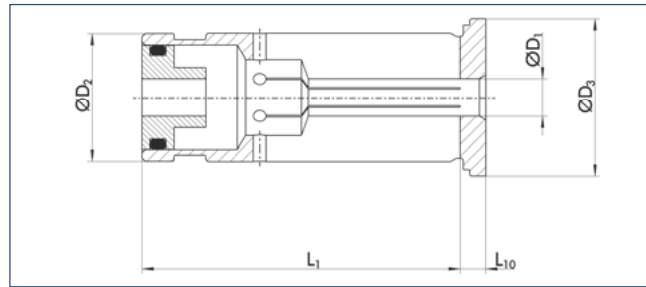

GZB-S 12 / 20

con enfriamiento de periféricos, collar ranurado, no resistente a refrigerantes



Technical data

Datos técnicos

Description			D ₁	D ₂	D ₃	L ₁	L ₁₀	m
Descripción	ID		[inch]	[mm]	[mm]	[mm]	[mm]	[kg]
GZB-S 12-1/8"	0217900	•	1/8"	12.0	16.5	45.0	2.0	0.1
GZB-S 12-3/16"	0217901	•	3/16"	12.0	16.5	45.0	2.0	0.1
GZB-S 12-1/4"	0217902	•	1/4"	12.0	16.5	45.0	2.0	0.1
GZB-S 12-5/16"	0217903	•	5/16"	12.0	16.5	45.0	2.0	0.1
GZB-S 12-3/8"	0217904	•	3/8"	12.0	16.5	45.0	2.0	0.1
GZB-S 20-1/8"	0217880	•	1/8"	20.0	24.0	50.5	2.0	0.1
GZB-S 20-3/16"	0217881	•	3/16"	20.0	24.0	50.5	2.0	0.1
GZB-S 20-1/4"	0217882	•	1/4"	20.0	24.0	50.5	2.0	0.1
GZB-S 20-5/16"	0217883	•	5/16"	20.0	24.0	50.5	2.0	0.1
GZB-S 20-3/8"	0217884	•	3/8"	20.0	24.0	50.5	2.0	0.1
GZB-S 20-7/16"	0217885	•	7/16"	20.0	24.0	50.5	2.0	0.1
GZB-S 20-1/2"	0217886	•	1/2"	20.0	24.0	50.5	2.0	0.1
GZB-S 20-9/16"	0217887	•	9/16"	20.0	24.0	50.5	2.0	0.1
GZB-S 20-5/8"	0217888	•	5/8"	20.0	24.0	50.5	2.0	0.1

• Can be supplied from stock


• Posible suministro de existencia

 Additional sizes and special designs available on request

 Tamaños adicionales y diseños especiales disponibles sobre pedido

GZB-S 12 / 20

with peripheral cooling, collar slotted, not coolant proof

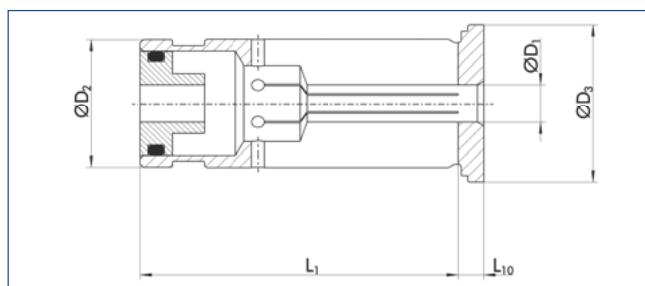

GZB-S 12 / 20

con enfriamiento de periféricos, collar ranurado, no resistente a refrigerantes



Technical data

Datos técnicos

Description			D ₁	D ₂	D ₃	L ₁	L ₁₀	m
Descripción	ID		[mm]	[mm]	[mm]	[mm]	[mm]	[kg]
GZB-S 12-3	0217910	•	3.0	12.0	16.5	45.0	2.0	0.1
GZB-S 12-4	0217911	•	4.0	12.0	16.5	45.0	2.0	0.1
GZB-S 12-5	0217912	•	5.0	12.0	16.5	45.0	2.0	0.1
GZB-S 12-6	0217913	•	6.0	12.0	16.5	45.0	2.0	0.1
GZB-S 12-8	0217914	•	8.0	12.0	16.5	45.0	2.0	0.1
GZB-S 20-3	0217920	•	3.0	20.0	24.0	50.5	2.0	0.1
GZB-S 20-4	0217921	•	4.0	20.0	24.0	50.5	2.0	0.1
GZB-S 20-5	0217922	•	5.0	20.0	24.0	50.5	2.0	0.1
GZB-S 20-6	0217923	•	6.0	20.0	24.0	50.5	2.0	0.1
GZB-S 20-7	0217924		7.0	20.0	24.0	50.5	2.0	0.1
GZB-S 20-8	0217925	•	8.0	20.0	24.0	50.5	2.0	0.1
GZB-S 20-9	0217926		9.0	20.0	24.0	50.5	2.0	0.1
GZB-S 20-10	0217927	•	10.0	20.0	24.0	50.5	2.0	0.1
GZB-S 20-11	0217928		11.0	20.0	24.0	50.5	2.0	0.1
GZB-S 20-12	0217929	•	12.0	20.0	24.0	50.5	2.0	0.1
GZB-S 20-13	0217930		13.0	20.0	24.0	50.5	2.0	0.1
GZB-S 20-14	0217931	•	14.0	20.0	24.0	50.5	2.0	0.1
GZB-S 20-15	0217932		15.0	20.0	24.0	50.5	2.0	0.1
GZB-S 20-16	0217933	•	16.0	20.0	24.0	50.5	2.0	0.1
GZB-S 20-17	0217934	•	17.0	20.0	24.0	50.5	2.0	0.1

• Can be supplied from stock

• Posible suministro de existencia

i Additional sizes and special designs available on request


i Tamaños adicionales y diseños especiales disponibles sobre pedido

Accessories • Accesorios

Intermediate Sleeves • Boquillas intermedias

GZB-S 32

with peripheral cooling, collar slotted, not coolant proof

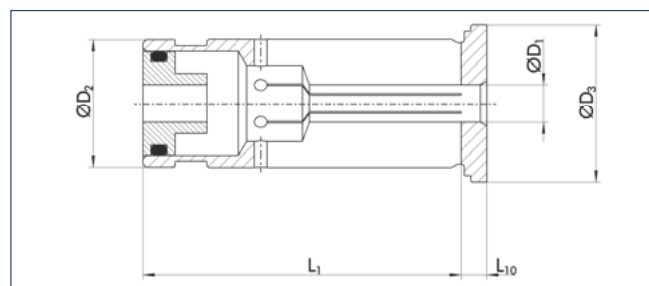

GZB-S 32

con enfriamiento de periféricos, collar ranurado, no resistente a refrigerantes



Technical data

Description			D_1	D_2	D_3	L_1	L_{10}	m
Descripción	ID		[inch]	[mm]	[mm]	[mm]	[mm]	[kg]
GZB-S 32-1/2"	0217804	•	1/2"	32.0	35.5	60.5	3.0	0.3
GZB-S 32-5/8"	0217806	•	5/8"	32.0	35.5	60.5	3.0	0.3
GZB-S 32-3/4"	0217808	•	3/4"	32.0	35.5	60.5	3.0	0.3
GZB-S 32-7/8"	0217810		7/8"	32.0	35.5	60.5	3.0	0.3
GZB-S 32-1"	0217812	•	1"	32.0	35.5	60.5	3.0	0.3

- Can be supplied from stock

 Additional sizes and special designs available on request


Datos técnicos

- Posible suministro de existencia

 Tamaños adicionales y diseños especiales disponibles sobre pedido

GZB-S 32

with peripheral cooling, collar slotted, not coolant proof

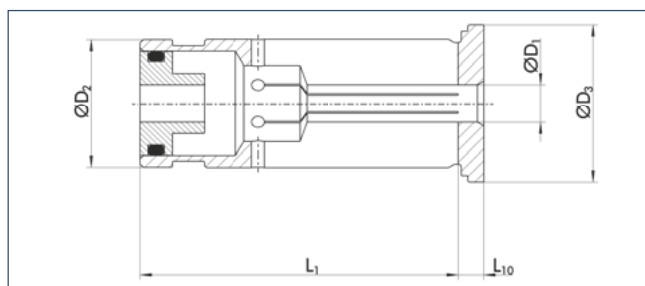

GZB-S 32

con enfriamiento de periféricos, collar ranurado, no resistente a refrigerantes



Technical data

Description			D ₁	D ₂	D ₃	L ₁	L ₁₀	m
Descripción	ID		[mm]	[mm]	[mm]	[mm]	[mm]	[kg]
GZB-S 32-6	0217940	•	6.0	32.0	35.5	60.5	3.0	0.3
GZB-S 32-8	0217941	•	8.0	32.0	35.5	60.5	3.0	0.3
GZB-S 32-10	0217942	•	10.0	32.0	35.5	60.5	3.0	0.3
GZB-S 32-12	0217943	•	12.0	32.0	35.5	60.5	3.0	0.3
GZB-S 32-14	0217944	•	14.0	32.0	35.5	60.5	3.0	0.3
GZB-S 32-16	0217945	•	16.0	32.0	35.5	60.5	3.0	0.3
GZB-S 32-18	0217946	•	18.0	32.0	35.5	60.5	3.0	0.3
GZB-S 32-20	0217947	•	20.0	32.0	35.5	60.5	3.0	0.3
GZB-S 32-25	0217948	•	25.0	32.0	35.5	60.5	3.0	0.3

Datos técnicos

- Can be supplied from stock

i Additional sizes and special designs available on request

- Posible suministro de existencia

i Tamaños adicionales y diseños especiales disponibles sobre pedido