


GENERAL DESCRIPTION / APPLICATIONS / DIMENSIONS



- Three way manual-reset solenoid valve.
- Suitable for gaseous media.
- Model for liquid media available upon request.
- Stainless steel internal parts. Stainless steel spring.
- Stainless steel internal parts.
- Stainless steel springs.
- 360° degrees orientable solenoid.
- Mountable in any position.

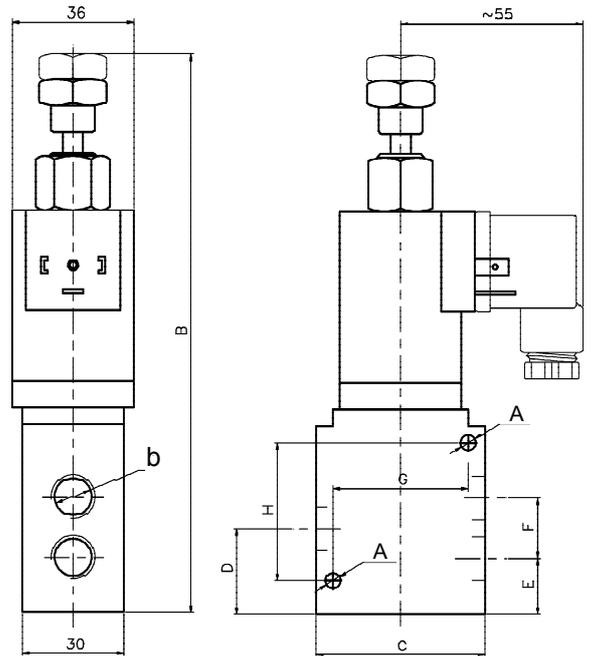


ELECTRICAL INFORMATIONS

Glass-reinforced nylon moulded coil with electrical connection suitable for DIN-43650A plug (2 poles+ground) or "faston" wire terminal.


- Coil type: B6
- Insulation class: F (155°C) - H (180°C) upon request.
- Winding wire class: H (180°C)
- Protection degree: IP-65 (EN60529 standards) when properly plug connected with DIN-43650A plug.
- Duty: Continuous - 100% ED
- Power consumption₍₁₎: 11W *
- Voltage tolerance: ± 10%
- Insulation: >1000 MOhm
- Dielectrical Strength: >2000 V/1'
- Standard voltages: 12, 24, 48, 110, 115, 125, 220, 240 Volt
- DC= o AC~(50/60Hz): other voltages available upon request.

* Alternate current operation (Vac~) is performed using a direct current coil and a DIN-43650A plug with internal rectifier (Nadi plug code: 398).

OPERATION



"Rest"



"Work"

Three way manual reset solenoid valves are normally used to realize safety pilot devices for single-acting actuators.

Manual reset solenoid valves can only change from "Reset" to "Work" condition operating the latching device manually.

"E" type operation

Spool of the valve is manually latched to the "Work" condition with the coil de-energized. Energizing the coil the spool will be unlatched and the valve will come back to the "Rest" position.

"D" type operation

Spool of the valve is manually latched to the "Work" condition with the coil energized. De-energizing the coil the spool will be unlatched and the valve will come back to the "Rest" position.

SPECIFICATIONS AND AVAILABLE OPTIONS

MODEL	ORIFICE DIAMETER mm	PRESSURE IN BAR			FUNZ.	Flow factor k _v (liters/min.)	WEIGHT Kg.	DIMENSIONS (millimeters)							
		NOMINAL MAX.	DIFFERENTIAL					A	B	C	D	E	F	G	H
			MIN.	MAX.											
F 0 3	7	16	0	14	D	12	0.9	4,5	168	50	25,5	15,5	20	40	41
F 5 3	7	16	0	14	E	12	0.9	4,5	162	50	25,5	15,5	20	40	41
F 1 3	11	16	0	14	D	30	1.1	6,5	182	60	33,5	18,5	30	48	57
F 6 3	11	16	0	14	E	30	1.2	6,5	176	60	33,5	18,5	30	48	57
F 1 3	11	16	0	14	D	30	1.5	6,5	182	60	33,5	18,5	30	48	57
F 6 3	11	16	0	14	E	30	1.8	6,5	176	60	33,5	18,5	30	48	57

suffix (options available upon request): ⁽¹⁾ "LC" (low consumption)

a Body material	b Port size	c Seals material	d Protection class
T Brass. N Nickel-plated brass. I Stainless steel.	C 1/4" GAS D 1/4" NPT E 3/8" GAS T 3/8" NPT F 1/2" GAS G 1/2" NPT	0 Buna N 1 FPM 7 HNBR	P IP 65 When properly plug connected with DIN-43650A plug.