


OPEN GRAVITY SLUDGE THICKENER WITH STEEL SUPPORT**REF: CVA-E-TC**

Due to the broad range of equipments, we can provide underground, above-ground, open or closed thickeners.

The sketch below shows an open model, with metallic supports for an above-ground installation, outlet and inlet pipes and lower evacuation pipe.

Optional (please refer to following pages):

- Ladder with rail.
- Tramex for upper part.
- Upper rail.
- Manual or motorized drain valve.
- Agitator.

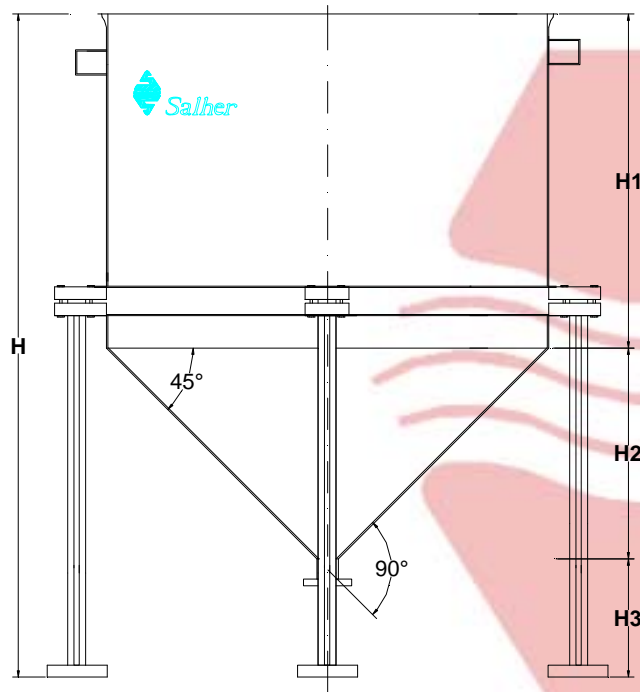

CENTRAL CYLINDER					PARTIAL HEIGHT				PIPE				CAPACITY
φD	φd1	φd2	φd3	E	h1	h2	h3	H	c1	c2	c3	c4	[LITERS]
2.000	200	90	500	700	1.600	1.000	500	3.100	150	200	300	1.700	6.000
2.500	200	90	620	700	1.620	1.250	500	3.370	250	250	350	2.000	10.000
3.000	200	90	620	700	1.620	1.500	500	3.620	250	250	350	2.500	15.000
3.500	200	90	620	700	2.020	1.750	500	4.270	250	300	400	3.000	25.000
4.000	200	90	620	700	2.520	2.000	500	5.020	250	300	400	3.500	40.000

INNER SIZE IN MM