

MESSBOI 25

Length measuring device with mechanical counter

Usable as hand-held or stationary device

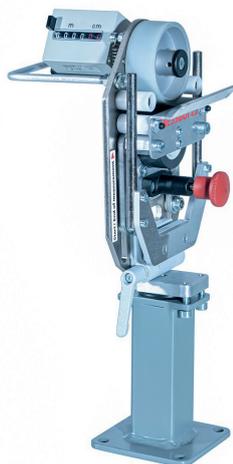


Fig. 1 MESSBOI 25 with socket and hand grip

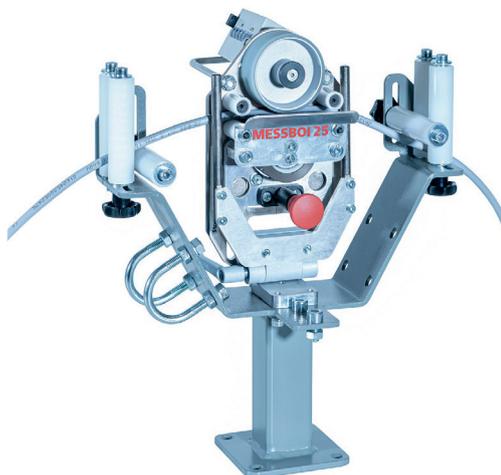


Fig. 2 MESSBOI 25 with socket and roller cage unit



Fig. 3 MESSBOI 25 with hand grip

MESSBOI 25

- Mechanical length measuring device for material- \varnothing 2 - 25 mm

Functionality:

The length measuring device is suitable for measuring the length of almost all types of cables and similar winding goods. The device can be used both as a hand-held device and as a stationary device. For portable use the screws have to be loosened by the socket and the length measuring device can be removed from the socket. Counter wheel detent and a clamp which can be opened to the side enables a convenient insertion of winding goods.

- Counter with reset button
- Continuously adjustable cable guiding
- Aluminium measuring wheel with vulcanized PUR coating
- Socket in the scope of delivery contained
- Non-slip hand grip
- Available with separately roller cage unit

Technical Data	MESSBOI 25	MESSBOI 25 conformity assessment*
Part No.	85101000	86101000
Measuring range	2 - 25 mm	2 - 15 mm
L x W x H	approx. 120 x 160 x 350 mm	approx. 120 x 160 x 350 mm
Display of counter	9999,99 m	9999,99 m
Error limit	+/- 0,5 %	+/- 0,5 %
Colour	aluminum / silver	aluminum / silver
Colour socket	RAL 7005 mouse grey	RAL 7005 mouse grey
Weight without socket	approx. 1,4 kg	approx. 1,4 kg
Weight socket	approx. 0,7 kg	approx. 0,7 kg

Equipment	Inlet and outlet roller cage unit
Part No.	85101001
Roller cage unit for better guidance of the winding goods.	

*Conformity assessment procedure according to Annex II, Module F1 of the Measuring Instruments Directive 2014/32 / EU according to accuracy class III by the German calibration authority, valid for all member states of the EU / EEA.

Note: Conformity assessment (formerly first calibration) is only approved for usage in direct sales!

Fig. may differ from the original. Technical modifications reserved. Status 06/2022