


1

GREASE SEPARATOR CHAMBER BY FLOTATION**REF: PSG - PRFV****Applications:**

- Sand and solids removal.
- Oils and grease removal.

Characteristics:

- Grit and FOG (Fats, Oils and Grease) chamber. Salher brand, model PSG-PRFV, in GFRP with highly chemical resistance to corrosive agents
- Screening and accumulation sand and coarse solids.
- Oils and grease floating system through blower and diffusers.
- Oils and grease extraction through scraper.

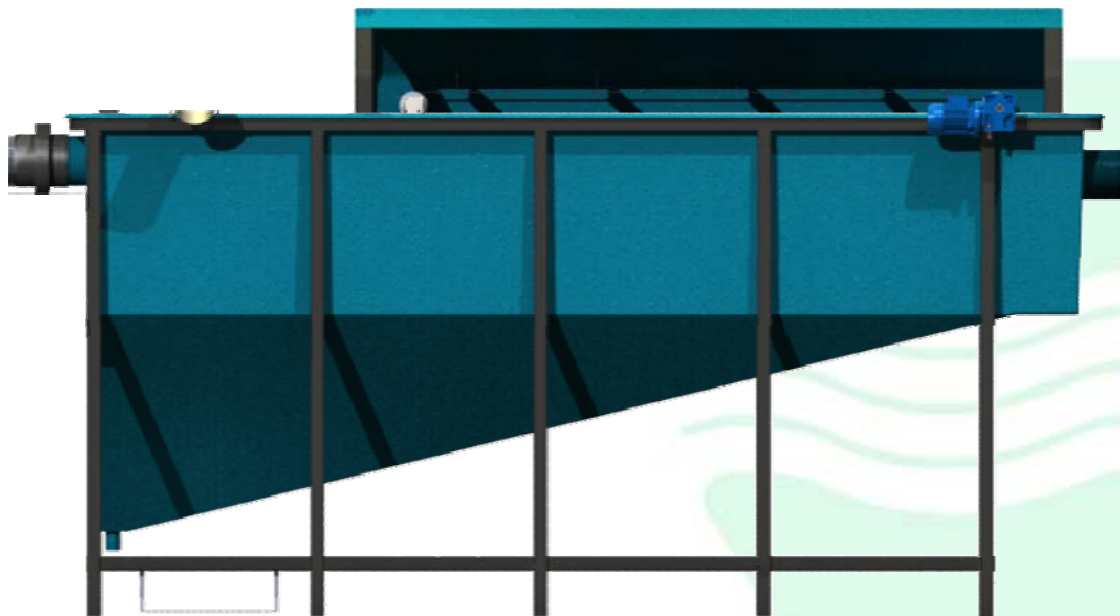

REF.	Maximal flow [m ³ /h]	LENGTH [mm]	WIDTH [mm]	HEIGHT [mm]	CONNECTIONS Inlet / Outlet/ Purge / Discharge [mm]	MATERIAL
PSG-PRFV-1	11.0	3468	932	1963	125/125/63/110	PRFV
PSG -PRFV-2	22.0	3968	932	1963	160/160/63/110	PRFV
PSG -PRFV-3	44.0	4468	1382	2000	200/200/63/110	PRFV
PSG -PRFV-4	88.0	5465	1382	2000	200/200/63/110	PRFV
PSG -PRFV-5	130.0	6468	1582	2030	250/250/63/110	PRFV
PSG -PRFV-6	173.0	7000	1582	2030	315/315/63/110	PRFV